BROMLEY
PUBLIC LIBRARIES

Central
Reference Library
and
Information Bureau

BN706538·1

WITHDRAWN
FROM
BROMLEY LIBRARIES

BROMLEY LIBRARIES

# THE COAL-FIELDS OF GREAT BRITAIN.

# CHARACTERISTIC FOSSILS OF THE COAL FORMATION.

*Frontispiece*

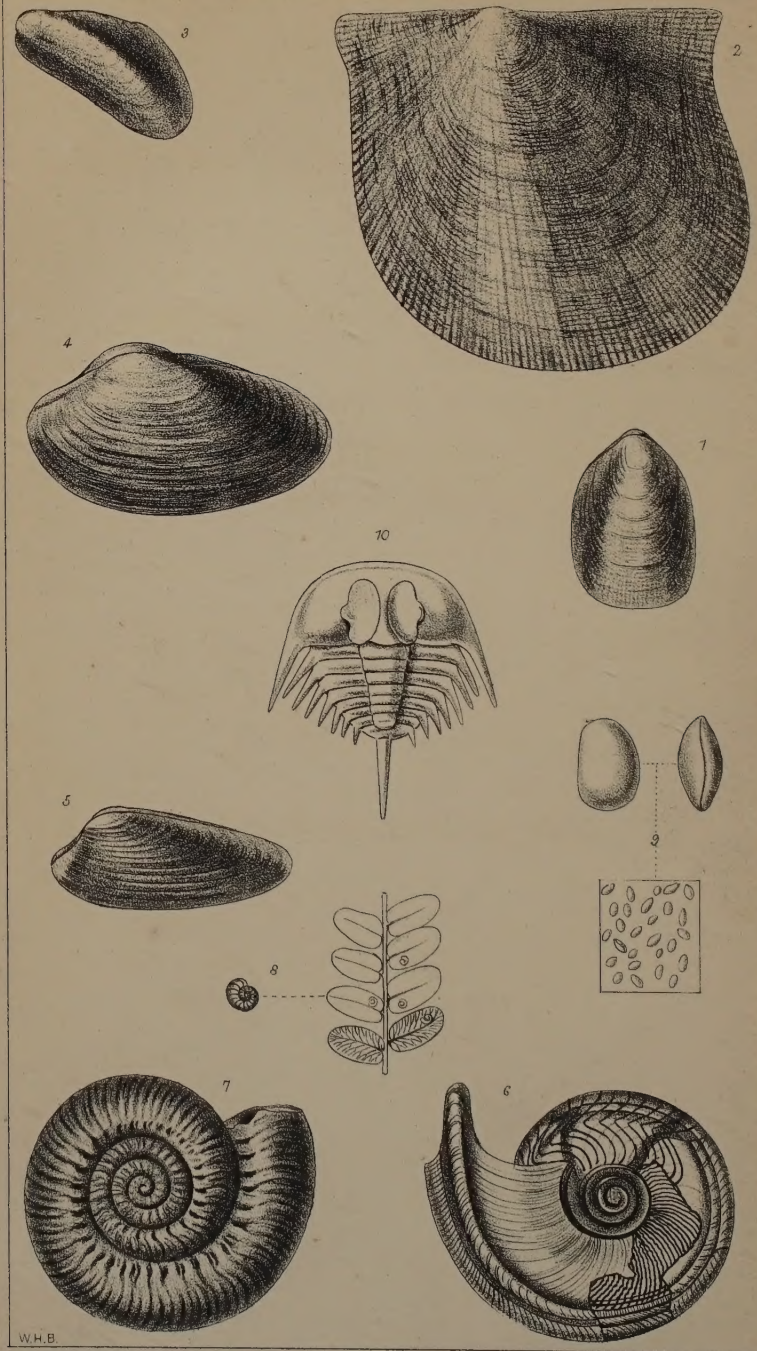


1. *Lingula squamosa.*
2. *Aviculopecten papyraceus.*
3. *Anthracomya carinata.*
4. *Anthracosia centralis.*
5. *Anthracosia aequilinus.*
6. *Goniatites bilinguis.*
7. *Goniatites Listeri.*
9. *Leperditia Okeni var. Scoto-burdigalensis.*
10. *Belinurus trilobitoides.*

THE

# COAL-FIELDS OF GREAT BRITAIN:

THEIR

## History, Structure, and Resources.

WITH

NOTICES OF THE COAL-FIELDS OF OTHER PARTS OF THE WORLD.

BY

EDWARD HULL, M.A., F.R.S.,

*Director of the Geological Survey of Ireland;*
*Professor of Geology in the Royal College of Science, Dublin; Master in Engineering (Hon. Causâ), University of Dublin; Honorary Member of the Edinburgh, Glasgow, Dudley, and Midland Geological Societies.*

With Maps and Illustrations.

---

*THIRD EDITION, REVISED AND ENLARGED.*

EMBODYING THE REPORTS OF THE ROYAL COAL-COMMISSION.

---

LONDON:
EDWARD STANFORD, 6 & 7, CHARING CROSS.

1873.

BROMLEY PUBLIC LIBRARIES
AL
C
CLASS
R 553.2
ACC
BA 31874
BN 706538.1

Watson and Hazell, Printers, London and Aylesbury.

TO

The Memory of

SIR RODERICK I. MURCHISON, Bart., D.C.L., F.R.S.,

LATE DIRECTOR-GENERAL OF THE GEOLOGICAL SURVEY

OF THE UNITED KINGDOM.

## PREFACE TO THE THIRD EDITION.

So many years have elapsed since the publication of the first edition of this work, and so great has been the advance in our knowledge of the Coal-fields of nearly all countries within this period, that, in order to make the reader acquainted with it, I have found it necessary to re-write the greater portion of the book.

Within the interval here alluded to, the following are some of the more important events which have occurred in reference to the subjects herein treated :—

1. A great step towards completion has been made in the Government surveys of the British coal-fields.
2. In British India, the Government surveys of the important coal-fields lying along

the valley of the rivers Damuda and Nerbudda have been completed, and the results published.

3. An important addition to our knowledge of the coal-fields of the European continent has been made, by the publication of the joint work of Professors Geinitz and Fleck, and Dr. Hartig, entitled "Die Steinkohlen Deutschlands und Anderer Länder," in three elaborate volumes, containing descriptions illustrated by maps and drawings of the coal-fields of Europe, together with their palæontology, and the technical and mechanical operations connected with coal-mining; to this may also be added the publication of Dr. Hochstetter's "New Zealand," in which the coal-fields of that wonderful island are very fully described.

4. The fourth and last event I would here record, is the publication by the Royal Commissioners appointed by Her Majesty to enquire into the coal-resources of Great Britain, and matters connected

with the consumption of coal. In the following pages I have endeavoured to embody the results arrived at by the Commissioners with the subject-matter of the work, so as to bring them within reach of the general public.

The addition to this work of the maps of individual coal-fields, together with its growth in size, owing to the number and variety of details, renders an increase of cost unavoidable, for which I trust the reader will consider he gets full value.

From amongst the numerous expressions of approval which this little work has received, both from public men and reviewers, the author is contented to select one, extracted from the speech of the Earl of Derby (then Lord Stanley), delivered before the British Association for the Advancement of Science, at Birmingham, in 1865. Speaking on "The Coal-question," his Lordship says, "For those who desire to go more deeply into the facts of the case, as far as they are known, than is possible within the limits of an oral address, I should recommend

two books on the subject, published within the last two or three years,—one by Mr. Hull, the other by Mr. Jevons. They differ somewhat widely in conclusions. The one takes what we may call 'the sanguine view' of the case, the other a view comparatively despondent; but in both one and the other you will find what is, perhaps, more important than the inferences of those authors, and that is, a very ample stock of materials upon which to found your own conclusions."—*Daily News*, 11th Sept., 1865.

# LIST OF ILLUSTRATIONS.

## PLATES.


PAGE

FRONTISPIECE—PLATE OF CHARACTERISTIC FOSSILS OF THE COAL-FORMATION.

1. MAP OF COAL-BASIN OF SOUTH WALES . . . . 82
2. MAP OF SOMERSETSHIRE COAL-FIELD . . . . 104
3. MAP OF COALBROOK DALE COAL-FIELD . . . . 130
4. MAP OF COAL-FIELDS OF NORTH WALES . . . . 139
5. MAP OF SOUTH STAFFORDSHIRE COAL-FIELD . . . 155
6. MAP OF NORTH STAFFORDSHIRE COAL-FIELD . . . 168
7. MAP OF SOUTH LANCASHIRE COAL-FIELD . . . 184
8. MAP OF THE WARWICKSHIRE COAL-FIELD . . . 220
9. MAP OF THE LEICESTERSHIRE COAL-FIELD . . . 225
10. MAP OF YORKSHIRE, DERBYSHIRE, AND NOTTS. COAL-FIELD . 231
11. MAP OF NORTHUMBERLAND AND DURHAM COAL-FIELD . . 252
12. MAP OF BRITISH ISLES, SHOWING ORIGINAL COAL-AREAS . 464
13. GENERAL MAP OF BRITISH COAL-FIELDS.

# WOODCUTS.


PAGE

1. Portion of Frond of Pecopteris lonchitica . . 46
2. Calamites verticillatus . . . . . 48
3. Sigillaria . . . . . 49
4. Lepidostrobus ornatus . . . . . 54
5. Vertical Section in Lower Coal-measures near Wigan . 71
6. Section across the Coal-field of South Wales . . 86
7. Section across the Pembrokeshire Coal-field . . 90
8. Section across the Bristol and Somersetshire Coal-field . 105
9. Section across the Coal-field of Coalbrook Dale . . 134
10. Section of Upper and Lower Coal-measures of Coalbrook Dale . . . . . 136
11. Section across the Denbighshire Coal-field . . 144
12. Section across the Anglesea Coal-field . . . 152
13. Section across the South Staffordshire Coal-field . 156
14. Section across the North Staffordshire Coal-field . 168
15. Section across the Lancashire Coal-field . . . 184
16. Section across the Warwickshire Coal-field . . 221
17. Section across the Leicestershire Coal-field . . 226
18. Section across the Yorkshire Coal-field . . . 232
19. Section across the Leinster Coal-field . . . 305
20. Section across the Leitrim Coal-field . . . 308
21. Section across the Coal-field of Liége . . . 331
22. Section across the Coal-field of Valenciennes . . 332
23. Ideal Transverse Section of England . . . 475

# CONTENTS.

PAGE

INTRODUCTION . . . . . 1

## PART I.

### CHAPTER I.

HISTORY OF COAL-MINING—Introductory Remarks—Mention of Coal in the Bible—Mention of Coal by Theophrastus, B.C. 238—Pliny the Elder—Strabo—Ancient Britons—Flint-axe found imbedded in Coal—Axe of solid oak found in Derbyshire—Stone hammers at Ashby-de-la-Zouch—Romans in Britain—Cinders found in Roman ruins—Old Works near Wigan probably referable to them—Cinders at Castlefield, Manchester—Coins amongst Cinders at North Brierley—Works at Benwell and Magna—Lanchester—Uriconicum—Anglo-Saxon Period—Mention of Coal in the Saxon Chronicle (852)—On the derivation of the term "Coal"—British name "Glo"—Superseded by the Saxon "græfan"—afterwards "Col"—Anglo-Norman Period—No mention of Coal in the Doomsday Book—Two references in the Boldon Book, 1183—Old Roman Proverb—Reign of Henry III.—Use of Coal prohibited—Edward I.—Fourteenth and Fifteenth Centuries—Difficulties of Coal-mining before the Invention of the Safety-Lamp—Agricola's Writings—Pennant's Account of the Flintshire Collieries—Camden's Account of Coal-Works in Warwickshire in 1600; and of the Cannel Coal of Lancashire in the 17th Century—Coal-Works in Ireland (very ancient)—Hamilton's Letter on the Works of Ballycastle—Old Coal-Works in the Lothians—Campbell's Account of the Coal Trade in 1670,

PAGE

1690, 1760—Sir J. Clerk's Account of the Collieries of Whitehaven—Revolution in Coal-Mining after the invention of the Safety-Lamp and Steam Engine—Past and present Coal Produce of Great Britian—Produce of all the Countries in the World—Produce of Great Britain each year from 1854-70—Increase, and its causes . . 9

CHAPTER II.

Formation of Coal—Two Theories—Fragmentary Character of the representative Plants—Brongniart's classification—Lindley's Experiments on the perishable nature of Plants when immersed—Uniformity of the Coal-vegetation—Arctic Regions—Climate of the Coal-Period—Growth of the Coal-Plants—Ferns—Calamites—Sigillaria—Stigmaria—Lepidodendron—Lepidostrobi—Halonia—Lycopodites—Knorria—Ulodendron—Coniferæ—Sternbergia—Trigonocarpum—Nœggerathia—General character of the Coal-vegetation—Fossil Shells—Göppert's Observations on Carboniferous Plants . . . . . 40

CHAPTER III.

Formation of Coal—Sir W. Logan's Observations in South Wales—Underclays—Theory of Oscillations—its difficulties—Darwin's Researches on the Elevation of Land—Application to the Theory of the Formation of Coal—Evidences that the Coal Formation is of Estuarine Origin—Fossils—Enormous Subsidence of the Bed of the Sea in South Wales and Nova Scotia—Aquatic habits of the Sigillaria, &c.—Swamps of the Mississippi, &c.—Nature of the Strata associated with Coal—Composition of Coal—Observations of Bischof—Analyses of Coal—Clay Ironstone—Faults—Millstone Grit—Yoredale Rocks—Carboniferous Limestone—Permian Rocks—New Red Sandstone—How a Coal-seam was formed—Tabular View of the Formations . . . 63

PART II.

CHAPTER I.

South Wales Coal-field—Topographical extent—Structure—Anticlinal Axis—Scenery—Deep Valleys—Surveys—

PAGE

General Succession of Strata—Anthracite and Bituminous Coal-Districts—Formation of Anthracite—Disturbances of the Strata in Pembrokeshire—General Succession of the Coal-series—Pennant Grit-series—List of Coal-seams—Ironstones—Faults—Fossils—Resources—Estimates of Messrs. Vivian and Clark, Commissioners . . . 82

CHAPTER II.

Bristol and Somersetshire Coal-field—Topographical description—Geological Structure—Succession of Strata—Number of Coal-seams—Divisions of the Coal-measures—Section of the Coal-series—Flexures and Faults—Resources—Mr. Prestwich's Estimate—Concealed Coal-basin . . . . . 104

CHAPTER III.

Forest of Dean Coal-field—Structure—Scenery—Succession of Formations—Succession of Coal-seams—Iron Produce—"Horses" or Rock-faults—Resources . . . . 116

CHAPTER IV.

Forest of Wyre Coal-field—Extent and Structure—Permian Breccia—Section of Coal-formation—Fossils . . 122

CHAPTER V.

Shrewsbury Coal-field—Extent and Structure—Permian Rocks—Alberbury Breccia—Limestone Band in Coal-measures—Coal-field of the Clee Hills—Structure—Basaltic Covering—Coal-fields of the Forest of Wyre, Shrewsbury, and Clee Hills formed near old Land . . . 126

CHAPTER VI.

Coalbrook Dale Coal-field—Extent and Structure—Surveys—Mr. Prestwich's Memoir—Denudation of Upper Coal-measures—Permian Beds—Succession of Coal-seams—Simon fault—Upper Coal-measures—Faults—Fossils—Ironstones—Extent to which the Coal-field has been exhausted—Resources . . . . . 130

PAGE

CHAPTER VII.

Coal-fields of North Wales—General arrangement—Denbighshire Coal-field—Succession of Strata—Permian Rocks—Coal-series—Ironstones—Fossils—Large district with Coal yet undisturbed—Resources—Rapid increase of Coal-produce . . . . . 139

CHAPTER VIII.

Flintshire Coal-field—Extent and Structure—Coal-series—Lower Coal-measures, and their Fossils—Extension of the Coal-measures under the Dee—Resources . . . 146

CHAPTER IX.

Anglesea Coal-field—Structure and Extent—Great Fault—Succession of Strata and Coal-seams—Permian and Trap Rocks—Number of Collieries and Coal-produce . . 152

CHAPTER X.

South Staffordshire Coal-field—Extent—Scenery—Physical Geology—Succession of Strata—Coal-seams—Southerly thinning away of Strata—Cannock Chase—Trap Rocks—Rowley Rag—Greenstone and Volcanic Ash—Mr. Allport's observations — Ironstones — Fossils — Resources — Mr. Hartley's Estimates—Produce of Coal and Iron, &c. . 155

CHAPTER XI.

North Staffordshire Coal-field—Structure and Extent—Faults — Permian-beds — Succession of Strata — Coal-series—Ironstones—Fossils—Resources—Coal and Iron Produce . . . . . 168

CHAPTER XII.

Cheadle Coal-field—Goldsitch Trough—Hæmatite—Cheshire Coal-field . . . . . 180

CHAPTER XIII.

South Lancashire Coal-field—Extent—Western boundary—Faults—General range of the Beds—Succession of Formations—Coal-series at St. Helens—Wigan—Bolton—Lower Coal-measures or Gannister Series—Series at Man-

PAGE

chester—Oldham—Mountain Mines—Cheshire Coal-field—Marine Fossils in the Middle Coal-measures—Iron Ores—Faults—Fossils from the Upper, Middle, and Lower Coal-measures—Resources—The Manchester Coal-field—Upper Coal-measures—Iron Ore—Thickness of Carboniferous Rocks . . . . . 184

CHAPTER XIV.

The Burnley Coal-basin—Structure and Position—Section across the Pendle Ridge—Thickness of Carboniferous-series—Coal-seams at Burnley—Gawthorpe-series—Ironstone—Coal-produce of Lancashire . . . . . 203

CHAPTER XV.

Park Gate Coal-field, Cheshire—Structure—Coal-series . 210

CHAPTER XVI.

Ingleton and Burton Coal-field—Position—Structure—Permian Beds—Coal-series . . . . . 212

CHAPTER XVII.

Cumberland Coal-field—Structure—Succession of Strata—Coal-series of Whitehaven, Workington, Maryport—Faults—Permian Beds—Resources . . . . . 214

CHAPTER XVIII.

Warwickshire Coal-field—Extent and Structure—Succession of Strata—Coal-seams—Extent of Coal under Permian Rocks—Resources—Trap Rocks—Produce . 220

CHAPTER XIX.

Leicestershire Coal-field—Extent and boundaries—Succession of Strata—Coal-series of Moira and Coleorton districts—Igneous Rocks—Rock-faults—Salt Water in Main Coal—Resources—Fossils . . . . . 225

CHAPTER XX.

Derbyshire and Yorkshire Coal-field—Extent and Structure—Escarpment of Magnesian Limestone—Millstone Grit—Historical Notices—Succession of Strata, Derbyshire, and Notts.—Coal-series at Shireoak—Barnsley—Cinderhill—

PAGE

Principal Coal-seams—Coal-series at Halifax—Fossils—Extension of the Coal-field below the Permian and Triassic Strata—Probable Basin shape—Views of Professor Ramsay—Ackworth Rock—Quantity of Coal concealed—Depth of the Top Hard Coal at various points—Thickness of the Magnesian Limestone — Resources — Mr. Woodhouse's Estimates—Produce . . . . . 231

CHAPTER XXI.

Coal-field of Durham and Northumberland—Topographical extent and structure—Synclinal axis—Extension below the Magnesian Limestone—Southern Limits—Lower Carboniferous Rocks—General Series of Strata—Principal Coal-seams—Coal-series — Basaltic Dykes — Faults—Coal under the Sea—Resources—Mountain Limestone district—Coal-seams therein—Produce of Coal . 252

CHAPTER XXII.

Coal-fields of Scotland—Range of the Carboniferous Rocks—Geological Age of the Coal-fields—Lower and Upper Coal-series — Change which the Lower Carboniferous-series undergoes in its extension from England into Scotland—General succession of Strata . . . . . 266

CHAPTER XXIII.

Coal-field of the Clyde-basin—Range and Structure—Trap Rocks—*Coal-series* — Upper — Middle — Lower—Coal and Ironstone—Blackband Ironstone—Gas Coal—Fossil Remains of Upper and Lower Series . . . . . 272

CHAPTER XXIV.

Coal-fields of Mid-Lothian and Haddington—Range and Structure—Thickness of Beds—Coal-series of Mid-Lothian—East Lothian Coal-field—Coal-series—Lower Carboniferous Rocks . . . . . 280

CHAPTER XXV.

Coal-field of Fifeshire—Coal-series—Invertiel Coal—Lower Carboniferous-series—Trap Rocks—Clackmannan Coal-field—Position—Coal-series . . . . . 286

PAGE

CHAPTER XXVI.

Coal-field of Ayrshire — Position and Structure — Carboniferous-series—Coal-series at Ayr—Dalmellington—Igneous Rocks . . . . . 289

CHAPTER XXVII.

Lesmahago Coal-basin—Geological Position—Coal-series at Coal Burn and Auchenheath—*Canobie Coal-field*—Position and Structure—Coal-series at Canobie and Sanquhar—*Brora Coal-field*—Geological Position of Strata—Section of Strata—*Coal-field of Skye*—Resources of the Coal-fields of Scotland—Produce of Coal and Iron . . . . . 293

CHAPTER XXVIII.

Carboniferous Rocks of Ireland—Anthraxiferous and Bituminous Districts—Southern Group of Coal-fields—Northern Group—Southern Group, Succession of Strata—Coal Districts of Clare, Limerick, and Cork—Queen's Co., Kilkenny, Tipperary—Section of Castlecomer Coal-basin—Fossils . . . . . 300

CHAPTER XXIX.

Northern Group of Coal-fields—*Coal-field of Leitrim*—Historical Notices—General Succession of Beds—Coal-series at Kilronan—Details—Ironstones—*Tyrone Coal-field*—Its Importance—Structure—General Succession of Beds—Coal-series at Coal Island—*Antrim Coal-field*—Geological Structure and Position—Ballycastle Coal-series—Fossils—Basaltic Rocks—Section in Murloch Bay—Geological Age, Lower Carboniferous—Resources of the Coal-fields of Ireland—Produce . . . . . 307

CHAPTER XXX.

On the Quantity of Coal in the concealed Coal-fields—Views of Sir R. Murchison, Messrs. Jukes, Ramsay, Godwin-Austen, Prestwich, and the Author—Table of available Quantities of Coal in the Visible Coal-fields—Summary of Amount of Coal under Newer Formations—General Summary of Coal Resources of Great Britain and Ireland . 320

## PART III.

### CHAPTER I.

PAGE

Coal-fields of Europe—France and Belgium—Range—Structure—Contortions of Strata—Coal-fields of Central France—Coal-fields of Rhenish Prussia—Structure of the Saarbrook Coal-field—Thickness of Strata—Fossils—Coal-fields of Saxony—Basin of Zwickau-Chemnitz—Fossils—Coal-field of the Plauenschen Grundes—Other Saxon Coal-tracts—Westphalian Coal-fields—Structure and extent—Coal-field of Ibbenburen—Of Piesberg in Hanover—Fossils—Bohemian Coal-fields—Wealden Coal of N.W. Germany—Silesian Coal-fields—Fossils—Moravian Coal-fields—Other Coal or Anthracite Districts of Switzerland, Savoy, and Italy—Spain—Russia—Poland . 330

### CHAPTER II.

Coal-fields of India—Geological Surveys—Geological Age of the Damuda Coal-formation—Fossils—Ramganj Coal-field—Karampura Coal-field—Bokaro Coal-field—Jherria Coal-field—S. Karampura Coal-field—Ramgurh Coal-field—Kurhurbari Coal-field—Deoghur Coal-field—Nerbudda Coal-field—Assam Coal-fields—Summary . . . 352

### CHAPTER III.

Coal-fields of China—Observations of Baron Richthofen—Geological Age of the Chinese Coal-formation—Coal-fields of Malaysia and Japan—Labuan in Borneo—*Coal-fields of Australia*—Victoria—New South Wales—Rev. W. B. Clarke's Classification of Strata—Coal-districts of Newcastle, &c.—Queensland—Tasmania—*Coal-fields of New Zealand*—Geological Age of Coal-strata—North Island Coal-tracts—South Island Coal-tracts—Massacre or Coal Bay—Motupipi—Pakawau—Provinces of Nelson and Canterbury—Fossils—Coal-districts of Kawai—Otago—Future of New Zealand . . . . . 362

PAGE

AFRICA—Remarkable scarcity of Fossil Fuel—Livingstone's Discovery of Coal on the Zambesi . . . . . 387

## CHAPTER IV.

NORTH AMERICA—British Possessions—Coal-field of Newfoundland—New Brunswick and Nova Scotia—Coal-series and Fossil-remains—Cumberland Coal-field—Colchester and Hants—Pictou—Richmond and Cape Breton . . 388

## CHAPTER V.

AMERICAN STATES—Original Extent of Coal-formation—Probable connection with Europe—Position of Old Carboniferous Land—Professor Rogers' Survey—Appalachian Basin—Illinois—Indiana—Kentucky—Missouri—Arkansas—Michigan—and Texas Coal-fields—Their extent and areas—Total area of United States' Coal-fields—Position of the Strata over the Central Districts—Changes on approaching the Alleghany range—General Structure of this Mountain Chain—Springs of Petroleum and Salt—Thickness of Coal-beds—Sir C. Lyell's Account—Succession of Lower Carboniferous Rocks—Fossils—Animals and Plants—Richmond Coal-field—Its age and structure—Coal-fields and Lignite Strata in Colorado and New Mexico—Utah Territory—Vancouver Island—Valley of the Mackenzie—Arctic Regions—*California*—North Pacific Coast—Analysis of Coals—Disco Island—Trinidad—Origin of Mineral Pitch—Mr. Walls' Survey . . . 396

## CHAPTER VI.

COAL-FIELDS OF SOUTH AMERICA—Brazil—Coal-districts of Rio Grande do Sul—Section of Strata—São Sepe—São Jeronymo—*Coal-fields of Banda Oriental*—Geological Age of these Coal-fields—Fossils—*Coal-fields of Chile*—Analyses of Coal—Geological Age . . . . . 410

## CHAPTER VII.

ANNUAL PRODUCTION OF COAL IN VARIOUS COUNTRIES—Rate of Annual Increase of Production of British Coal—Produce of British Coal-fields for 1870 . . . . 416

## PART IV.

### CHAPTER I.

PAGE

AN INQUIRY INTO THE PHYSICAL LIMITS OF DEEP COAL-MINING—Vertical limit of 4,000 feet adopted by the Royal Commissioners, the same as that originally adopted by the Author—Increase of Temperature and Pressure—Experiments at the Puis de Grenelle—Neu-Saltzwerk—Geneva—Mondorff—Cornwall—Monkwearmouth Colliery—Dukinfield Colliery—Rose Bridge Colliery—Differences in the rate of increase at Dukinfield and Rose Bridge, and cause—General results of observations—The "Invariable Stratum"—Table of Increase of Temperatures—Ventilation of Mines—Experiments at Rose Bridge—The Air Current—Effect of increased circulation—Effect of humidity or dryness of Air—Hygrometric observations in Coal Mines, Durham, Lancashire, N. Wales, &c.—Effects of Pressure of Strata . . . . . 442

### CHAPTER II.

DURATION OF OUR COAL SUPPLY—Estimates of Coal-resources by the Royal Commissioners and the Author—Annual increase of consumption of Coal—Its causes—Increase of Population—Professor Jevons' Views—Mr. Price Williams' Views—Duration on the bases of diminishing ratio, and of arithmetical increase—Waste in combustion—Waste in working—The remedy—Necessity for Mining Schools . . . . . 449

## PART V.

### CHAPTER I.

PHYSICAL GEOLOGY OF THE CARBONIFEROUS ROCKS—*South-easterly attenuation of the Coal-measures of the North of England*—Comparative Vertical Sections—Arrangement of Strata in the South of England . . . . . 459

## CHAPTER II.

PAGE

ORIGIN OF COAL-BASINS—Visible British Coal-basins—Partly concealed Coal-basins—Basins not originally so formed—Lines of elevation and depression accompanied by denudation—Original distribution of the Coal-formation—Terrestrial Movements at the close of the Carboniferous period—South of England—Distribution of *Permian Strata*—Terrestrial Movements at the close of the Permian and Triassic periods—Basin-shape of Coal-fields due to intersection of these two axes—Distribution of Mesozoic Strata . . . . . 462

## CHAPTER III.

DISTRIBUTION OF THE MESOZOIC FORMATIONS—South-easterly attenuation of Strata—Comparative Sections—Denudation of Mesozoic Strata—Arrangement of Strata along a N.W. and S.E. line—Maximum denudation towards the North-west—Results of arrangement of Strata . . . . . 471

APPENDIX . . . . . 481

INDEX . . . . . 487

# INTRODUCTORY.

The question of the exhaustibility of our coal-fields is a highly complicated one; for while an actual exhaustion is beyond all possibility, a practical and sensible failure in the supply of coal is not only possible, but certain in course of time.

The debates in Parliament have brought into prominence a subject which, from the days of Sir Robert Peel's premiership, has more or less engaged the serious consideration of public men. The opinion of the learned Dr. Buckland regarding the probable exhaustion of the British coal-fields is known to have influenced the measures of that statesman; and in the former debates on the Commercial Treaty with France, the statistical information produced by Mr. Vivian is believed to have materially influenced our Legislature in favour of the measures of Government.

I refer to this debate as illustrating how diver-

sified are the opinions entertained on this subject by some of the most eminent politicians, and which are only a reflex of those of the public generally.

The want of reliable evidence being thus acknowledged, I ventured on the attempt to supply it, having at command some of the materials, and being assisted by friends who possessed considerable local knowledge of special coal-fields. In 1866 this, and the cognate questions, were entrusted to Royal Commissioners, who have now issued an able Report, which places the question of the resources of the coal-fields beyond the pale of speculation, and furnishes data for the guidance of the statesman and political economist, upon which to found his own conclusions.

The first evidence of a decreasing supply of coal will be a sensible rise in the price; but, through the agency of railways, this will not become general until the resources of all the coal-fields shall have become developed to their full capabilities; because, where the supply shortens in one district, a corresponding impetus will be given to mining in others now only partially opened up.

Two illustrations may be mentioned. Many

of us may live to see the southern half of the South Staffordshire coal-field exhausted, or nearly so; but while this consummation is approaching, the northern half of the same great coal-tract is far from being developed to the extent of which it is capable. The exhaustion of the southern portion is already telling upon the northern.

The interesting and instructive coal-field of Coalbrook Dale, in Shropshire, is fast approaching extinction as a coal-producing district. There is probably not more coal than will last for a quarter of a century, at the present rate of consumption. But there is a neighbouring coal-field, that of Denbighshire, capable of producing about five times its present supply. Between Brymbo collieries on the north and those of Ruabon on the south, there is a large area, well stored with coal, which has only recently been disturbed. Other examples will be found in the following pages.

In speaking of the exhaustion of a coal-field, I do not use the term in an absolute sense. There will always be bands of coal, besides leavings, in the coal mines, sufficient to afford a small supply to the immediate neighbourhood for domestic purposes. A coal-field may be said to be exhausted, when it is necessary to import largely

from neighbouring districts for manufacturing and more general purposes. From various causes, large quantities of coal have been left in old workings, much of which it will be impossible ever to recover.

I have already said, that the British coal-fields can never be utterly exhausted. This is strictly true. Even disregarding the coal-beds which lie concealed beneath formations newer than those of the Carboniferous period, there are, in some districts, coal-seams which are buried 6,000, 8,000, and perhaps 12,000 feet beneath the surface, and which can never be reached. I refer particularly to the great coal-basin of South Wales, which, as Mr. Vivian has shown, is capable of supplying the whole of England with coal; but for, I believe, a far shorter period than Mr. Vivian estimates it. In a future page I shall enter in greater detail into this subject; and here content myself with stating the broad fact of the enormous depth of some of the coal-beds in that basin, on the authority of the late Sir H. T. de la Beche and Sir W. Logan, through whose energy the magnificent geological survey of this district is now in the hands of the public. Now, without assigning in this place any theoretical limit to the depth at which coal may be worked, few will

be disposed to deny that coal-seams at these depths might as well be buried beneath the waters of the Atlantic, for all the probability there is of their ever being rendered available.

There are other districts, principally in the Midland counties, where the coal-strata, though not themselves of any very great thickness, dip under higher formations till they reach vast depths. For instance, there is no reason to doubt that coal underlies the plain of Cheshire, between the coal-fields of Lancashire on the north, Staffordshire on the east, and Flintshire on the west; yet, in order to reach the highest workable coal-seam at Northwich, it would be necessary to carry the shaft which reaches the great salt rock at least 4,000 feet deeper than at present.*

There are, however, very large districts in Staffordshire, Leicestershire, and Warwickshire, overspread by formations belonging to the Permian and Triassic systems, where coal may be reached at depths within 3,000 or 4,000 feet. In

* It has been estimated that there are in England and Wales no less than 48,465 millions of tons of coal at a greater depth than 4,000 feet, and reaching down to 10,000 feet from the surface, where the temperature would be 3° higher than that of boiling water.—"Report of Coal-Commission," vol. i., p. 17.

the north-eastern counties of Durham, Yorkshire, and Notts, there are also vast stores of fossil-fuel within reach, but overspread by formations belonging to the age of the Permian and Trias. In Durham, the Magnesian Limestone, which attains there a thickness of 500 feet, has for several years been penetrated in various places down to the underlying coal; and the same formation, in its southerly extension into Yorkshire and Nottinghamshire, bids fair to give rise to a coal-producing district of large extent and capacity.* One of the deepest mines in England, that of Shireoak, near Worksop, belonging to the Duke of Newcastle, is situated on the Magnesian Limestone; and a few years since, after obstacles of no ordinary kind had been triumphantly surmounted, was carried down into the long-wished-for coal-seam, at a depth of 510 yards.

The depth of many coal-shafts in the north of England is already very great. The "Arley mine" is now worked at Rose Bridge colliery, near Wigan, at a depth of 815 yards (2,445 feet).† The "cannel" seam is reached by shafts 600 yards in depth, in at least two collieries; Pendleton colliery, near Manchester, is 536 yards

* See Map.

† Appendix A.; see Brit. Assoc. Rep., 1870, p. 30.

deep; Duckinfield, in Cheshire, 686 yards. The Monkwearmouth pit, near Sunderland, has a depth of 530 yards: and collieries with shafts between 400 and 500 yards are not uncommon in the coal-fields of Lancashire, Yorkshire, and Durham.*

Notwithstanding, however, all that art and industry can invent to facilitate mining at great depths,—notwithstanding the increased powers of the machinery and improvements in ventilation, the employment of flat wire ropes, the substitution of steel for wrought iron, and the use of two or more "lifts" or stages, at intervals from the bottom of the mine,—we must ultimately reach a depth at which the temperature will be so high as to prohibit inexorably mining operations. What that depth may be I shall discuss in a future chapter: in the meanwhile, let us review briefly the progressive course of coal-mining from its infancy to the present time.

* Some of the collieries in Belgium are of great depth; one of these, I am assured, reaches 932 yards or 860 metres, and some in Saxony reach 800 yards and upwards.

# PART I.

## CHAPTER I.

### FRAGMENTS IN THE HISTORY OF COAL-MINING.

The first attempts at coal-mining are enveloped in obscurity; but even from the chronicles of those days, when nothing was thought worth recording save the accession of a prince, the feuds of neighbouring states, and the details of a battle, enough has been incidentally noted to enable us to trace back the art of coal-mining to very early times.

Its beginning was sufficiently humble. The nature and property of coal being little understood, there was nothing in the outcropping of a black substance along the sides of a hill or the banks of a brook to arrest attention; but it is not improbable that from the earliest periods—at any rate from the time in which implements and weapons of metal replaced those of flint—fossil

fuel may have been employed for smelting purposes. Fortunately on this point we are not left altogether to conjecture, as I shall have occasion to show presently.

Like many other treasures of Nature, the use of coal did not become general until its necessity had become paramount. While in the days of Anglo-Saxon and Anglo-Norman art, and those which immediately succeeded, the plains of England were overspread with almost continuous forests, growing, as in Staffordshire and Lancashire, frequently in dense luxuriance over the mineralized forests of geologic ages, and while these forests readily yielded an abundance of fuel for all the purposes of the times, it was both unnecessary and improbable that the labour and risk of mining should become general. The precious mineral was reserved for a generation to whose very existence it is almost a necessity; a generation that, without its aid, could scarcely (as far as we can see) have arrived at the position in art, industry, and navigation, which it has attained in the nineteenth century.

I must now ask my reader to accompany me through a few of those details in the history of coal-mining which I have been able to collect. I do not profess to have exhausted the subject;

for the more I have entered into it, the more am I satisfied that much remains to reward the industry of the antiquarian. The notices we find are like stepping-stones for crossing a river; sometimes they are large, copious, and closely placed, at other times wide apart, so that we have to make a leap perhaps over several centuries at a time; but I have no doubt further researches will enable us to add to the number of the stone steps, so as to lessen the gaps, if we cannot hope to make a continuous road from the shore of the past to that on which we stand.

It is scarcely necessary to observe, that the frequent references to coal in the Sacred Scriptures cannot be considered as pointing to that mineral as at present understood. The original word doubtless means charcoal, which, like the Latin term, may be employed to designate fuel of both kinds. I should not, however, be so confident that coal itself was not sometimes intended, if there was any certainty of its existence as a product of the Holy Land or Arabia; but as far as I am aware it is only to be found very sparingly in Lebanon on the one hand, and near the shores of the Black Sea and Bosphorus on the other.

*Period before Christ.*—Theophrastus, a Greek

author who lived about 238 years before the Christian era, describes, in brief but determinate language, the nature, uses, and source of coal. It is a sufficient proof of this mineral being intended, that the description applies accurately to it, and to no other. He says: "They call those fossil substances (λιθύς ἄνθρακας) anthracite (or coal), and when they are broken up for use, are of an earthy character (γεώδεις); nevertheless, they inflame and burn even like charcoal (καθάπερ οἱ ἄνθρακης), and are used by the smiths." He adds, that the coal is found along with amber and other substances in Liguria, and in Elis on the road to Olympias over the mountains.*

There are several other passages in the same work descriptive of combustible minerals, but described in such vague language that it is impossible to identify them. The passage above quoted is, it appears to me, sufficient; and its value would scarcely be strengthened by the addition of a score of others which might be applied to as many different substances.†

* It is scarcely necessary to give the original passage of which the above is a literal translation, and varies only slightly from that of Mr. John Hill, who edited an edition of the "History of Stones" in 1746. Pennant also notices the passage, and does not hesitate to refer it to coal.

† See also the same author in "*Περι Λιθων.*" Art. 49.

The passage in Pliny* is of little service, though sometimes quoted as referring to coal. Speaking of a certain earth (Chia terra), he merely says of it that "Bitumini simillima est ampelitis." Theophrastus, in speaking of this stone, says: "There is a certain earth in Cilicia, which is heated and becomes glutinous. With this they smear the vines (as a protection) against worms." Strabo reiterates the above description —in all probability only quoting it.

*Ancient Britons.*—It might scarcely be credited, were it not established on incontestable evidence, that there were coal mines amongst those savage clans and roving barbarians, such as we are generally taught to consider the Britons of prehistoric times. The discovery of a flint-axe stuck into a bed of coal exposed to-day in Monmouthshire is a fact which, like the occurrence of a solitary fragment of a plant in a very ancient rock, proves a great deal more than appears at first sight. If we accept the theory, that flint weapons were the earliest representation of three stages of civilization, of which bronze implements were the second, and iron implements the third, this discovery carries us back to a very

* Nat. Hist., lib. xxxv. 16.

early period, antecedent to the invasion of the Romans.

Sir C. Lyell informs us, on the authority of the late Mr. Smith of Jordan Hill, that a rude ornament, made of cannel coal, was found on the coast in the parish of Dundonald, lying fifty feet above the sea-level, on a surface of boulder clay, and covered with gravel containing marine shells. The writer adds: "If we suppose the upward movement to have been uniform in central Scotland before and after the Roman era, and assume that as twenty-five feet indicate seventeen centuries, we should then carry back the date of the ornament in question to fifteen centuries before our era, or to the days of Pharaoh, and to the period usually assigned to the exodus of the Israelites from Egypt.*

Coming down to less ancient times, I may mention the following case. Near Stanley, in Derbyshire, some years since, while some miners were engaged in driving a heading through the "Kilburn coal," they broke into some very old excavations, in which they found axes or picks formed out of solid oak. The implements were entirely destitute of metal, and were cut out

* "Antiquity of Man," p. 55.

from one solid piece of timber. It is hard to imagine the use of such an instrument where iron was known; while it is also difficult to conjecture how an axe of this kind could have been formed without the assistance of iron. The neighbourhood of these old workings abounds in iron-ore, several beds of clay iron-stone occurring both above and below the Kilburn coal. If the use of these ores had been known, it is scarcely to be supposed that the miners would have made use of picks formed entirely of oak. Implements which appear to have belonged to an equally early period are stated to have been found in old coal-workings near Ashby-de-la-Zouch, consisting of stone hammer-heads, wedges of flint, as also wheels of solid wood.*

Whittaker states that there is indubitable evidence from the discoveries at Castle-Field, near Manchester, that the Britons had made use of coal in that neighbourhood. He refers to the existence of fragments of coal in the beds of sand *under* the Roman road, and in a pit a few feet deep contiguous thereto. But I very much doubt the value of such evidence. Those acquainted with the Drift, or Post-pliocene deposits

* Mammat's "Geological Facts."

of Lancashire and Cheshire, know that drifted fragments of coal are extremely plentiful therein; and there is strong probability that those upon which he dilates so enthusiastically were carried to their beds in the sand long even before the time of the *Aborigines* of Britain; and not by the hand of man.

*Romans in Britain.*—That the Romans were acquainted with the use of coal during their occupation of Britain is highly probable, both from what we know of the character of the race and from circumstantial evidence. They had stations in many places close to the out-crop of valuable coal-seams, and cinders have been found amongst the ruins of Roman towns and villas. I may here mention a case which has always appeared to me as probably referable to this period. Wigan in Lancashire was a Roman station. Not far to the north of that town, a bed of coal—one of the most valuable in Lancashire, and known as the "Arley Mine,"—out-crops along the banks of the river Douglas. Not long since, while driving a tunnel to divert the course of the river, this coal-seam of 6-feet in thickness was found to have been mined in a manner hitherto altogether unknown. It was found to have been excavated into a series of

polygonal chambers, with vertical walls opening into each other by short passages, and on the whole presenting on a ground plan something of the appearance of a honeycomb. The chambers were stated to be regular both in size and form over an area of at least 100 yards in one direction, and were altogether different from anything within the experience of the miners of the district. Local tradition ascribed these excavations to the Danes, though I could not discover upon what grounds. We should probably be nearer the truth in assigning them to the Romans during their sojourn in these parts. There is something in the symmetrical arrangement and regularity of the works peculiarly Roman, reminding one of their tesselated pavements, or the ground plans of their baths and villas, in which symmetry of form appears to be the guiding spirit. It would, however, have been more satisfactory had the evidence rested on the discovery of works of art within the excavations. But it is time to return from this digression to the more sure word of history.

If Whittaker, the historian of Manchester, has been unsuccessful, as it appears to me at least, in establishing upon satisfactory evidence the use of coal by the Ancient Britons, he has been more

fortunate in showing that fossil fuel from the Lancashire coal-field was burnt by their successors, the Romans. Castle-Field—an original settlement of the Britons—was afterwards possessed by the Romans under the name of Mancunium. In the course of time it has slightly changed its name, and developed into the metropolis of the northern counties of England. Whittaker states, that amongst other Roman remains turned up about a century ago, cinders and scoriæ were discovered in several places, as well as the "actual refuse of some considerable coal-fire."*

The same author also relates, that in the West Riding of Yorkshire, near North Brierley, a quantity of Roman coins, the very best indices for dates, were found "carefully reposited" amid many beds of coal-cinders heaped up in the adjacent fields.†

Horseley, speaking of some inscriptions found at Benwell, near Newcastle-upon-Tyne, the Condercum of the Romans, states that there was "a coalry not far from that place, which is judged by those best skilled in such affairs to have been

* "History of Manchester," vol. i., p. 301.

† Ibid, vol. i., p. 303.

wrought by the Romans."* Wallis also states, that in digging some of the foundations of the city of Magna, or Caervorran, in Northumberland, in 1762, cinders, in all respects similar to those derived from coal, were found in considerable quantity.†

Mr. T. J. Taylor, in an article on the "Archæology of the Coal-trade,"‡ also refers to the discovery of coal-cinders as part of the relics of the Roman stations of the neighbourhood of Newcastle-upon-Tyne, notices of which are contained in the records of the Antiquarian Society of that town.

Similar evidences of the use of coal by the Romans are stated to have been discovered at Lanchester, and Elchester, in the county of Durham.

One of our most laborious investigators in the field of archæology, Mr. T. Wright, considers that the Shropshire coal-field was "discovered" by the Romans. Not far from the borders of this coal-field stood the ancient Uriconium, now the village of Wroxeter; and during the recent explorations, which resulted in bringing to light many

* "Britannia Romana."

† "Hist. of Northumberland."

‡ Proc. Archæol. Institute of Newcastle, vol. i., p. 151.

objects of interest in the domestic arrangements of the Roman inhabitants, considerable quantities of coal—both in the raw state and partially consumed—were found, having been used apparently in heating the ovens. The fragments appeared to be of inferior quality, such as occurs when they are extracted at no great depth from the out-crop of the seams.* It is scarcely necessary to remind the reader that metallic mining was very largely carried on by the Roman colonists along the border counties of Flintshire, Denbighshire, and Shropshire, many of the principal lead mines having been opened up by them.

Assuming, from the general consideration of the case, that coal was not unknown to the Romans—though they do not appear to have invented a name for it while in Britain, and it was probably used more from curiosity than from necessity—we enter upon the Anglo-Saxon period, in which there is documentary evidence of the use of pit-coal for domestic purposes.

*Anglo-Saxon Period.*—Britton, in his description of Peterborough Cathedral, renders into modern English the following paragraph taken

* "Intellectual Observer," No. 4.

from the Saxon Chronicle of the Abbey of Peterborough :—"About this time (A.D. 852) the Abbot Ceolred let to hand the land of Sempringham to Wulfred, who was to send each year to the monastery '60 loads of wood, 12 loads of coal, 6 loads of peat, 2 tuns full of fine ale, 2 neats' carcases, 600 loaves, and 10 kilderkins of Welsh ale, 1 horse also each year, and 30 shillings, and one night's entertainment.'" * How Wulfred was to send the provident abbot "one night's entertainment" it is not necessary for our purpose to inquire; but this statement of the chronicler is highly valuable as establishing the fact that coal was at this early period an article of household consumption. It may also have been made use of by the monks, who were the artificers and craftsmen of their times, in the manufacture of metal-work for the churches and monasteries.

In connection with this period, it is matter for discussion whether our term "coal," which is evidently identical with the German "kohle," has been derived from our Saxon ancestors, or whether, on the other hand, the Germans have derived it from us. It is probable the term was in general use before the invasion of the

* "Cathedral Antiquities," vol. v.

Normans, otherwise the French or Latin name would in all probability have been adopted. The Saxon name *col* (German *kohle*) appears to have superseded the old British name *glo*, and if introduced into Britain at the colonization of the country by the German tribes, it is in favour of the supposition, that the art of coal-mining was practised in Europe during the first centuries of the Christian era.*

* I have been favoured with the following note on the derivation of the word Coal, by my relative, the late Mr. William J. Leacock, which I give entire :—

"There are only five copies extant of the original Saxon Chronicle, of which four are in the British Museum. The original Anglo-Saxon words used in reference to Wulfred's rent to the Abbot of Peterborough are—'and ꝥpælf ꝓoðun ȝnæfan,' *i.e.*, in modern English letters, 'and twælf rothur græfan.' Bosworth, in his A.S. Dictionary, gives under Græfe, an; m. Coal: Carbo fossilis. Chr. 852 (*i.e.*, the above passage), so that this seems to be the only passage in which the term is used. No derivation is given, and I can find no parallel in the Dutch or German; but perhaps, as we have Anglo-Saxon 'Greaf or Graf,' Dutch the same, German 'Grab,' and so through all the northern languages, for a trench or 'grave,' it simply means the 'dug-up' earth.

"I find, however, in the A.S. Dictionary, 'Col. plur. cola, colu. [Ters., *i.e.*, Teiresia *hóal*, Dutch hool.] Coal, carbo: with reference to Psalm xviii. 12, 13, and cxxxix. 11, *i.e.*, the Psalms by Spelman, London, 1640, the division of the Vulgate being used.'

"There is also Gled, Gloed, plur., with many parallels in the northern languages, meaning a burning coal, coal, fire; carbo, used in Psalm xviii. 12, etc.

If we have derived the term "coal" from our Saxon forefathers, from whom did they derive it? On this point my late esteemed and erudite friend, the Rev. W. C. Coleman, a man who combined an unusal amount of linguistic and scientific knowledge with an ardent love of natural history, has favoured me with his views on this interesting topic, in a letter which I gladly avail myself of this opportunity of publishing.*

My correspondent says: "Regarding the derivation of the word COAL, I believe it is to be referable to a pretty widely-spread root, signifying simply *Black*. Sanscrit it is काल, and in Arabic character ﻛﺎﻟ = kálá. This occurs in Turkish in the form ﻛﺎﺭ = kárá, with the dialectic change of r for l;—*e.g.*, Kárá-on, the Black water; Kara Denghoz, the Black Sea; Kara Dagh, the Black Mountain. Also in Greek, in the form *Κελαινος*,

"In Somers' A.S. Dictionary, the word *Græfa* is not to be found; but *Græf*, which means a grove as well as a grave. He gives 'Col. carbo., a coal to burn;' but says nothing about derivation.

"The following is Richardson's etymological account of the word 'Coal.' He says it is 'of unsettled etymology. A.S. *Col:* German and Dutch, *Kohle:* Swedish, *Kol.*' Vossius derives from the Greek, *χαλεος* pro *χηλεος*, Ignis epitheton. Wachter from *χηλοειν*, comburere. Ure seems to decide for the Swedish *Quilla*, Westro-Goth *Kylla*, accendere ignem (to kindle a fire)."

* Dated from Burton-on-Trent, 5th Feb., 1862."

used for *Black* by Homer, and which implies the existence at an earlier period of a simpler form, Κελας. No doubt the root occurs in other languages, but I have not the means of examination at hand. Perhaps the Arabic قار gâr = asphalte, may also have something to do with it."

*Anglo-Norman Period.*—It is matter for surprise, as well as regret, that in the great survey of England carried out by William the Conqueror, and recorded in that most matter-of-fact of all books, the Domesday Book, no instructions were delivered to the commissioners for inquiring into the extent and value of the mineral property of the central and northern counties. They appear to have confined their investigations entirely to the extent, rights, and ownership of the surface land, together with the classification of the inhabitants; but throughout the counties of York, Lancashire, Derby, and Nottingham, abounding in coal and other minerals, no mention whatever is made of these latter sources of wealth.

In order to test this point, I turned to the page relating to Chellaston in Derbyshire, where a most valuable bed of gypsum, or alabaster, underlies a large extent of surface at no great depth, and crops out as a solid bed ten or twelve feet in thickness. This mineral (which we know

to have been worked centuries ago) could not even at that time have been undiscovered, for the ploughshare scrapes its surface in many places, and it may well be supposed to have been a source of wealth to the owner. Yet there is no mention made of the mineral value of the property in the "Dom Boc." Even the lead mines of Derbyshire, known to have been worked by the Romans, are unnoticed, and therefore we need not be surprised that coal receives no mention.

However, in the Boldon Book, containing the census of portions of the northern counties, and published in the reign of Henry II., we find at least two references to coal. It is here stated that the carpenter of Vernouth (now Wearmouth) who is an old man, holds twelve acres for life for making carts and harrows for the tenants, and that the smith (Faber) has an equal quantity of land for the iron-work of the carts, and finds the requisite coal (carbones invenit). I think this passage cannot be considered as referring to charcoal obtained from wood. In this sense the verb *invenit* would be inapplicable, but is not so when used in reference to a kind of fuel which requires discovery. The census of Seggefeeld follows very closely upon that of Vernouth, and

here also the smith of the village is said to find the coal for his forge.* What a curious insight into the customs of those times is afforded by these passages! In the small communities of Vernouth and Seggefeeld, the carpenter and smith are bound to keep in repair, and probably provide, the implements of agriculture for the farmers in consideration of a certain extent of land; money being probably not in general use amongst the villagers of that period.

In 1180, a grant of land was made to a collier (as stated by Bishop Pudsey) for providing coals to a cartsmith at Counden, in the county of Durham; another instance of a similar kind.

The year 1259 is memorable in the annals of coal-mining. Hitherto the mineral had not been recognized by authority, or in any public document; but in that year King Henry III. granted a charter to the freemen of Newcastle-on-Tyne for liberty to dig coals. Under the term "sea-coal" a considerable export trade was established

* Inquisitio de consuetudinis, et reditibus totius Ep'atus Dunelmensis, Anno 1183. The difficulty of reading this work, which, like the Domesday Book, is full of abbreviations and elliptical expressions, is great. As examples, I quote the passages above alluded to:—"Vernouth. Faber xii. acr' ℈ ferramentꝫ caruc' & carbones qm' invenit." "Faber, 1 bovat. ℈ ferrametꝫ carruc'. que fac'. & carbon' invenit."

with London, and it speedily became an article of consumption amongst the various manufacturers of the metropolis. But its popularity was short-lived. An impression became general that the smoke arising therefrom contaminated the atmosphere, and was injurious to the public health. Years of experience has proved the fallacy of the imputation; but in 1306 the outcry became so general that the Lords and Commons in Parliament assembled presented a petition to King Edward I., who issued a proclamation forbidding the use of the offending fuel, and authorising the destruction of the furnaces and kilns of all who should persist in using it. This was a year before the monarch's death, and the year which saw the overthrow of his life-long attempts upon the throne of Scotland, through the intrepidity of Robert the Bruce. But the proclamation against coal was as abortive as the endeavour to conquer the patriotism of the Scots. Prejudice gradually gave way as the value of the fossil fuel became better known, and from that time downwards its use became more extended; and it is very probable that throughout the 14th and 15th centuries coal was extracted near the outcrop of the beds over most, if not all, of the coalfields of Britain and Ireland. Historical records

are still extant from which we learn that collieries were opened during the 14th century in various parts of Yorkshire, Durham, and Northumberland.

The anonymous author of the "History of Fossil Fuel" observes in reference to the 13th century: "The strongest and most unequivocal proof that this species of fuel (coal) was in use amongst us during the reign of Henry the Third, is to be found in an inquisition preserved among the additions to Matthew Paris's History, of the date of 1245. Here we find it called *carbo maris*, or *sea-coal* — an appellation retained through succeeding centuries—with express mention of making pits to win it, and of the wages of the colliers that wrought in them."

Leland* has the following passage: "The vaynes of the se-coles ly sometyme upon clines of the se, as round about Coquet Island, and other shores; and they, as some will, be properly called se-coles; but they be not so good as the coles that are digged in the inner part of the lande."

We have numerous references to the use of coal in the 14th century.† Surtees, in his

* "Itinerary," vol. viii.

† Coal seems to have been discovered near Newcastle early in the 13th century; according to Rymer's "Fœdera," it was

"History of Durham," mentions a coal-mine in connection with the vicarage of Merrington, in the county of Durham, in 1343; and also notices the sinking of pits at Ferryhill, in the same county.

Mr. Taylor, in the Memoir already alluded to, says: "We have thus a tolerably clear historical account of the Newcastle coal-mining and its adjuncts in the 14th century. We have seen that collieries were then certainly opened over a considerable extent of our coal-field, since they were being worked in the districts of Newcastle, Elswick, Birtley, Winlaton, Merrington, and Lanchester. To these may be added coal-mines in Bedlingtonshire, the produce of which was probably shipped in the river Blyth (Northumberland), for we find the Bishop of Durham in 1368 appointing a supervisor of the mines of that district. That coals were also shipped from Sunderland in the same century we have proof in the rolls of Whitby Abbey in 1395, when '13 shillings and 4 pence were paid to William Rede of Sunderland for four chaldrons of coal.'"*

made an article of trade in London in the reign of Richard II. (1381), and generally burnt by the inhabitants of the metropolis in the year 1400.

* Proc. Archæol. Inst. Newcastle, vol. i.

The use of coal in London was resumed within a few years after its prohibition by the king in 1306; as we find in the "Petitiones in Parliamento," in 1321-2, a claim made for ten shillings on account of coal which had been ordered by the clerk of the palace, but the payment for which had been neglected.

Amongst other incidental notices of coal in the 14th century is that of Æneas Sylvius, afterwards Pius II. On his visit to Scotland he had opportunities of witnessing the poor receiving as alms at the gates of the monasteries pieces of coal, "which," he states, "they burn in place of wood, of which their country is destitute."*

Coal-mines are also mentioned in the abbey leases of this century. Tynemouth priory had a colliery at Elswick in 1330, let at a yearly rental of six marks, to be paid so soon as the tenant commenced working the coal. The rent of another new colliery in 1334 is stipulated at 40*s.* yearly.†

In the reign of Richard II., about the year 1381, coal was made an article of trade in London (Rymer's *Fœdera*). In 1400 it was burnt

* "Ænei Sylvii Opera," p. 443. (See Appendix.)

† Proc. Arch. Inst. Newcastle, vol. i.

generally for fuel in the metropolis, and in 1625 throughout the greater part of England.

In the reign of Queen Elizabeth the coal-trade flourished greatly, and continued to be regarded as an important source, not only of local but of national revenue, by succeeding monarchs. In the reign of Charles I. the trade was burdened by excessive taxation and grievous monopolies. After the capture of Newcastle by the Scottish army, the House of Commons undertook the regulation of the coal-trade, by which step supplies were shipped into the port of London for the use of the poor, coals having previously risen to the price of 4*l.* per chaldron.*

The difficulties under which mining operations were carried on before the invention of the steam engine, and more particularly of the "Davy lamp," must have been very great. An anonymous writer in the "Builder" states, that in many mines the only alternative the mediæval miner had to pitch darkness was the phosphorescent gleam from dried fish.† Those who wish to understand the art of mining as it was carried on at this period will find their curiosity amply gratified by turning over the pages of

* "Hist. Fos. Fuel," p. 316.

† See Appendix E.

Agricola's treatise on mining. This author, who wrote in the middle of the 16th century, has illustrated the various processes by a profusion of quaint drawings on a large scale. The horse-gin, which survives to the present day in many districts, was the engine chiefly employed both for lifting the coal, and for getting rid of the water. This latter object was also sometimes effected by means of pumps turned by windmills, or through tunnels driven with great labour to an outlet at a lower level.

Pennant, in his account of the collieries of Flintshire, states that there is documentary evidence to show that the coal-seams of Mostyn were worked in the time of Edward I.; and in the 17th century, Dublin and the eastern parts of Ireland were supplied from this district.*

In the year 1600, or thereabouts, coal was worked at Bedworth in Warwickshire, as we learn from Camden, who describes the process, and says that the miners assured him that large *toads* had been found in the solid coal.† In this century

* "Tour in Wales," vol. i. (1784.)

† Camden's "Britannia," Gough's edit., vol. ii., p. 464. This belief amongst miners of the existence of live toads in coal is very extraordinary, and is almost co-extensive with mining itself. I was assured by a miner in Lancashire, near Ormskirk,

also the mineral treasures of the bishopric of Durham were well known; and early in the 17th century the cannel-coal of Lancashire was used, not only by the poor for candles, but was manufactured into various articles of ornament or use. Camden, in speaking of the discovery of this most valuable description of coal at Haigh, near Wigan, says: "This neighbourhood abounds with that fine species of coal called *canal* or *candle*. It is curious and valuable, and besides yielding a clear flame when burnt, and therefore used by the poor as candles, is wrought into candlesticks, plates, boxes, etc., and takes a fine polish like black marble."*

Dr. Plot, Professor of Chemistry at Oxford, writing in 1686, describes with much minuteness the working of coal and clay-ironstone at Tunstall and Silverdale in North Staffordshire, and also the process by which the reduction of the ore was effected.†

That coal was worked in Ireland at least as early as the beginning of the sixteenth century,

that a toad had been brought up in a piece of coal from a mine thirty-six yards in depth, which immediately revived on reaching the surface!

* "Britannia," vol. iii., p. 390.

† "Natural History of Staffordshire."

and possibly much earlier, may be inferred from the following account given by Hamilton in his "Letters on the Coast of Antrim." He relates that in 1770 the miners of Ballycastle, in pushing forward an adit towards a bed of coal in an unexplored part of the coal-field, unexpectedly broke into a narrow passage, which proved to have been carried several hundred yards to a bed of coal, and then branched off into chambers. Pillars had been left at proper distances, and some remains of tools and baskets were found, which speedily crumbled to pieces. Those who are aware how the accounts of mining operations are handed down through several generations, will readily admit that the old works here mentioned, and of which all local tradition had been lost, must have been carried on at least a century and a half before the period when they were afterwards discovered, which would throw back the date nearly to the beginning of the 16th century.

In Scotland the coal-seams of the Lothians and Fifeshire were probably worked at a very early period. The ancient Celtic name still adheres to the little sheet of water, Loch Glow, lying near the border of the Fifeshire coal-field, and along whose banks thin coal-seams crop out.

Agricola, and after him Camden, mentions that in his time there existed in the latter county old coal-pits, filled with water, and surrounded by mounds of refuse called *coal-heughs;* and he adds that "many of the beds of coal have been on fire for centuries, and the heat still continues to melt the snow on the surface." * These old coal-works would appear to have been at least as old as the 15th century.

In reference to the coal-miners of Scotland, it will probably surprise many persons to learn that they were held in a state of actual and legal slavery down to the year 1799, when the Act of George III. chap. 56, was passed, by which all colliers in Scotland were declared free from servitude.†

After the great Fire of London, the Lord Mayor was granted an impost of one shilling per chaldron for rebuilding the city, which was further increased to three shillings. An additional tax of two shillings was afterwards imposed by Parliament in 1670, for the purpose of rebuilding fifty-two parish churches; and in 1677 a further tax of three shillings was laid

* Camden's "Britannia," vol. iv., p. 114. This elaborate work was published in 1607.

† Lord Cockburn's "Memorials of his Time" (1856).

on, partly for rebuilding St. Paul's. The duties for rebuilding the city churches were continued during the reign of Queen Anne. At the period of the great war with France the coal-tax rose to nine shillings and fourpence per chaldron, the whole of which has been repealed, with the exception of the City and Orphans' Duties, amounting to one shilling and a penny per ton.

Campbell, in his "Political Survey of Britain," published in 1774,* gives us some interesting details of the coal-trade in his time. He states, that although coal was employed in manufactures for several hundred years, it did not come into general use till the reign of Charles I., and was then sold for seventeen shillings a chaldron. In 1670, about 200,000 chaldrons, and at the Revolution (1690) upwards of 300,000, and in the reign of George III. (1760) double that quantity, was annually consumed in Britain. He adds: "There is little room to be alarmed from the apprehension of their (the mines) being exhausted, as the present works are capable of supplying us for a long series of years, and there are many other mines ready to be opened when any of these shall fail,"—a piece of information

* Vol. ii., p. 80.

which must have been exceedingly consolatory to those of the last generation, but not so assuring to us who have lived to see the annual consumption of more than 110 millions of tons.

Sir John Clerk, in a letter to a friend, written in 1739, gives an interesting account of the collieries of Whitehaven.* The coal-beds, even at that time, were worked far under the sea, so that, as the writer observes, Sir James's riches in part swim over his head, for ships pass daily above the very ground where his colliers work. The coals were drawn up by an engine turned by two horses, which went their circuits at full trot every eight hours, and three changes were employed every twenty-four hours. Sir John Clerk then proceeds to give a long and minute account of the quantity of coal raised, its cost, and how much the proprietor cleared after paying all expenses, which amounted to the very moderate figure of 600*l.* a year, or thereabout. The writer also states that the upper coal-seams were much exhausted near the sea, but that untouched treasures lay below.

We have now reached the margin of a new epoch in the history of coal-mining, marked by the invention of the steam-engine by Watt in

* Belonging to Sir James Lowther.

1784,* and of the safety-lamp by Sir Humphrey Davy in 1815. With these inventions a thousand new uses for the application of coal sprung into existence; railways, factories, steam-boats, iron-furnaces were multiplied; and Britain, owing to her enormous riches in coal and iron, taken advantage of by a people endowed with indomitable energy and intelligence, was enabled to place herself in the front place amongst the nations of the old world.

At the commencement of this century, the quantity of coal raised in Great Britain probably did not exceed ten millions of tons. In 1819, according to Mr. R. C. Taylor, the produce of our collieries was thirteen millions. In 1829, or ten years afterwards, 2,018,975 tons were shipped into the port of London alone. In 1840, the total quantity raised in Britain, according to Mr. M'Culloch, was thirty millions. Since then the increase has been rapid, though fluctuating.

* The inventions of Watt extend over a quarter of a century; but the year 1784 was that in which he patented the invention of the parallel motion of the piston-rod, the counter for recording the strokes, the throttle-valve, the governor, and the indicator. In that year also he patented a locomotive engine. The "first practical steam-boat" was the "Charlotte Dundas," built by Symington in 1801. The first effective locomotive engine was patented by Trevithick and Vivian in 1802. And at the trial on the Manchester and Liverpool railway, George Stephenson's engine, the "Rocket," gained the prize in 1829.

In 1850 was passed the Act of Parliament for the appointment of inspectors of coal-mines, a measure loudly called for by the frequent occurrence of appalling accidents. The total loss of life to persons employed in, and about, the collieries of Great Britain during the two years immediately following the passing of the Act, averaged 985 per annum; and the previous mortality was probably greater. Mr. Dickinson, one of H.M. Inspectors for Lancashire, has made a comparison of the mortality amongst the collieries of Belgium and those of this country, which shows that, as estimated by the number of hands employed, the proportion of deaths in Great Britain to those of Belgium were, in the year 1852, as 5·33 per thousand to 4·05; yet, when estimated by the standard of the quantity of coal raised, the comparison is in favour of this country, having been in the years 1851 and 1852 in the proportion of one life for every 31,000 tons in Belgium, to one life for every 54,822 tons in Britain. The result is owing to the more extensive employment of underground machinery in the coal-mines of this country than in those of the Continent.*

* Memoirs of the Lit. and Phil. Society of Manchester, vol. xii.

## CHAPTER II.

### ON THE PLANTS AND ANIMALS OF THE CARBONIFEROUS PERIOD.

The vegetable origin of coal was recognised as far back as 1785 by the philosopher Hutton,* and is demonstrable, not only by its microscopic structure, its combustible properties and chemical composition, but also by certain phenomena which may generally be observed in reference to its position in the strata.

Of the two theories of the formation of coal, the first, which refers its origin to drift-wood carried down by streams, and imbedded in estuaries, is certainly inapplicable to the vast majority of coal-seams; the second, according to which the vegetable materials grew on the spot where we now find them in the form of coal, is the only one which is in harmony with the phenomena

* James Hutton, "Theory of the Earth," Trans. Roy. Soc. Edinburgh, 1785.

which generally present themselves amongst British coal-measures.

The subject will be more intelligible to the reader if he become in some degree familiar with a few of the leading members of that luxuriant flora which flourished in the Carboniferous period.

That we have only a fragmentary wreck of the plants of this period must be evident; for although vegetation attained a vigour which has never before or since been equalled, yet the number of species of coal-plants as yet determined is only about one-twentieth of that of living plants now growing over Europe alone. The number of species noticed by Adolphe Brongniart was 500, which are classified as follows:*—

| | |
|---|---|
| Thallogens . . . . | 6 species. |
| Acrogens . . . . | 346 ,, |
| Gymnosperms . . . | 135 ,, |
| Doubtful . . . . | 13 ,, |

This number has since been increased by Professor Göppert, who estimates the known species of fossil plants of the Carboniferous period to be 879; these he classifies as follows:—

* "Histoire des Végétaux Fossiles." (Appendix D.)

CELLULARES, including Fungi, Algæ, etc., 13 species.
VASCULARES, 866 species, of which 772 are *Cryptogams*, or Ferns, Calamites, Lepidodendron, Sigillaria, etc.; and 94 are *Phanerogams*, such as Cycads, Conifers, etc.

The cellular Cryptogams are few in number, and of doubtful character; the great majority of the fossil plants of this period belong therefore to the vascular Cryptogamic class; the gymnosperm Phanerogams, Cycadeæ, and Coniferæ, are also represented in the Carboniferous flora, but by a much smaller proportion of species.

The perishable nature of plants under moisture or water is perhaps the principal cause of the fewness of the species preserved. For instance, there is every probability that there were grasses, mosses, and sedges, but of these we have scarcely a trace. It is probable, however, that individuals of a few species predominated very largely, as is the case now in our pine forests, and in the great cypress swamps at the mouth of the Mississippi. Dr. Lindley, by a very interesting experiment, appears to have arrived at a clue to account for the large preponderance of certain classes of plants amongst those which have been preserved. By immersing in cold water for two years a large number of plants, as nearly as possible representatives of those of the coal-measures,

he obtained the following results. He found that the dicotyledonous plants are in general incapable of resisting decomposition when immersed for two years, with the exception of the Coniferæ. 2ndly, That monocotyledonous plants are less liable to decomposition, but that grasses and sedges perish rapidly. 3rdly, That fungi, mosses, and equisetums disappear, while ferns have a great power of endurance, the effect of immersion being only *to destroy all traces of fructification;* a satisfactory reason why fossil-ferns seldom present this portion of their structure, though the fronds themselves occur in great numbers, and in admirable preservation.*

There appears to have been an uniformity in the vegetation of the Coal-period, to which there is now no parallel. The same genera, and many of the same species, ranged throughout the whole of Europe, and of North America from the Arctic regions as far south as the thirtieth parallel, that is to say, over a space comprehending about forty-five degrees of latitude; and this uniformity of vegetation is continued vertically, for we find the same species ranging throughout the whole

* Lindley and Hutton: "Fossil Flora," vol. iii.

series of strata, sometimes amounting to a thickness of at least 14,000 feet.

But perhaps the most inexplicable phenomenon in connection with this subject is the occurrence of coal and Carboniferous plants in the Arctic regions. They have been brought from Melville Island, in lat. 76°. Specimens of coal, fossil-wood, and shells belonging to Carboniferous types have been brought to this country by Sir E. Belcher from Albert Land, in lat. 78° of the western hemisphere, and by Mr. Lamont from Spitzbergen, in about the same parallel in the eastern, where the country is described as frightfully barren and desolate, and entirely destitute of vegetation, with the exception of saxifrages, reindeer moss, and similar dwarfish plants.* Reasoning from analogy, we could never have supposed that in latitudes now subject to the severest frosts throughout the greater part of the year, and even deprivation of light for a long period, a vegetation could have flourished allied to that of the tropics, or at least to that of the warmer temperate zones of the present day. But, in truth, the period of the coal-formation was entirely unique; it was never fore-

* Lignite and large trees have also been found in Iceland, but of what period is uncertain.

stalled, and has never been repeated; and of some of the most important coal-plants, such as *Sigillaria* and *Lepidodendron*, there are no living representatives. The general opinion of the highest authorities* appears to be that the climate did not resemble that of the equatorial regions, but was one in which the temperature was free from extremes; the atmosphere being warm and moist, somewhat resembling that of New Zealand and the surrounding islands, which we endeavour to imitate artificially in our hothouses.

Of the plants that are commonly preserved to us, the ferns seem to take the lowest rank, and the coniferæ the highest, the *Calamites*, *Sigillariæ*, and *Lepidodendron* occupying intermediate positions.* The ferns constituted a most prolific class, occurring in vast quantities in the shales which overlie the coal-seams. The Sigillariæ, Lepidodendrons, and Calamites appear to have formed the greater mass of coal; and the roots of the former especially (Stigmariæ) penetrate in vast quantities the under-clays or floors of the coal-seams. Coniferous trees, however, formed a considerable portion of the mass of the coal,

* See Sir C. Lyell, "Elementary Geology," 5th edit., p. 399.

† Dr. J. D. Hooker "On the Vegetation of the Carboniferous Period." Mem. Geol. Survey, vol. ii., p. 395.

and seem to have grown in company with the more characteristic plants above mentioned. I now proceed to give a short description of the genera which have been most prolific and characteristic amongst the flora of this ancient period.

Fig. 1.

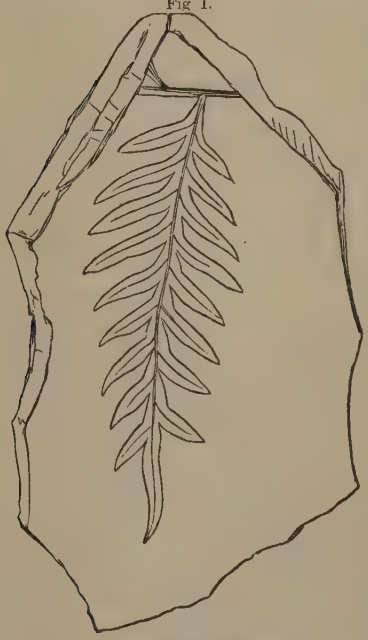

Alethopteris lonchitica.

Portion of frond; two-thirds nat. size. From a specimen in the Natural History Museum, Manchester.

Ferns. — These form a very large proportion of the Carboniferous flora; and, with the exception of their fructification, which has almost always disappeared, are preserved in great perfection. They are represented at the present day by the arborescent forms of the Tropics, which flourish in Ceylon, the islands of the Pacific, and the Indian Archipelago, where they are so abundant as to equal in numbers the whole of the phanerogamic plants.

The most abundant species in British coal-measures are: *Alethopteris* and *Pecopteris*, of which

there are about eight species of the former, and 30 species of the latter; *Sphenopteris*, 30 species; *Neuropteris*, 22 species.* Of the 140 species known in Britain, 50 occur in the same formation in North America, some ranging from Nova Scotia as far south as latitude 35°.† It is, however, to be remarked that we know little of the habits of the ferns of the coal-period, whether they grew out of the ground, or were parasitic on the trunks of trees; and it is even extremely uncertain what proportion of the large assemblage of species were tree-ferns, as we never find the fronds attached to their stems; and the stems themselves are of extreme rarity.

Calamites.‡—This is an abundant genus, and is considered by Brongniart to be represented in our day by the *Equisetaceæ*, of which the horse-tail of our swamps and ponds is a familiar

* I omit Cyclopteris, as it is still uncertain whether it belongs to the fern tribe. Mr. Salter believed it to be the leaf of a conifer. See "Geologist," vol. iii.

† Hooker. Ibid. *supra cit.*, p. 404.

‡ More recent researches appear to show that Calamites differs essentially from Equisetaceæ, and in many of its internal characters approaches Sigillaria. The following is the description of this genus by Lindley and Hutton: "Stems jointed, regularly and closely furrowed, hollow, divided internally at the joints by a transverse diaphragm, etc. Leaves (?) verticillate, very narrow, numerous, and simple."—"Fossil Flora."

example. Mr. Carruthers has confirmed this opinion, uniting to the Calamites, Asterophyllites, Annularia, and Sphenophyllum, as its leaves; whilst Volkmannia, a small slender cone composed of imbricated scales, in which he has discovered sporangia filled with spores, corresponding to the living horse-tails, he believed to be its fruit.* This family extends from Lapland to the Equator, attaining the greatest number of species in the temperate zone. The fossil genera differed from the recent in the absence of the encircling sheaths at the joints. The Calamites almost always occur leafless, and frequently attain a length of twenty feet.

Fig. 2.



Calamites verticillatus.
From a specimen in the Natural History Museum, Manchester. One-fourth natural size.

Sigillaria.—This plant is perhaps, *individually*, the most abundant, and has contributed more than any other to the production of coal. It has no living representatives; and about sixty species are known. *Sigillaria* may be readily distinguished from the stems of other plants,

* "Cryptogamic Forests of the Coal Period;" Royal Institution of Great Britain, April 16, 1869.

and externally, of *Lepidodendron*, of which family it is a member, by the flutings and striæ of the bark being disposed longitudinally, or parallel to the axis of the trunk, and impressed with leaf-scars at regular intervals between the furrows. The internal structure of the stem is precisely the same as in Lepidodendron, to which, according to Mr. Carruthers, it is closely allied. The first has been described by Goldenburg.

Fig. 3.

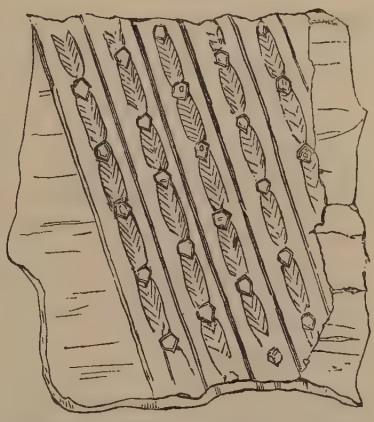

Fragment of Sigillaria. Half natural size, compressed. From a specimen in the Natural History Museum, Manchester.

The magnified sections of calcified specimens, figured and described by Mr. E. W. Binney, F.R.S.,* throw a very clear light on the internal structure of this genus. They show (1) a central axis of large and small polygonal vessels, having their sides barred. (2) This is enclosed by a narrow cylinder of vascular tissue, arranged in a radiating series, and divided by medullary

* Journ. Geol. Soc. Lond., vol. xviii.; 3 plates.

rays.* (3) Next a narrow zone of small round bundles of fine vascular tissue. (4) A broad zone of delicate cellular tissue, which, in the specimens, has generally been destroyed, and replaced by mineral matter. (5) Beyond this a wide zone (occupying about half the diameter of the stem) of coarse cellular tissue, gradually passing into an outer circle of small hexagonal utricles, arranged in radiating series. (6) The whole enclosed in a thin outer bark of coarse cellular tissue. The structure of a specimen of Lepidodendron is similar to the above, except that it wants the internal cylinder (2) of radiating vessels.

A silicified section, on being submitted to microscopic examination by M. A. Brongniart, led him to the conclusion that Sigillaria formed a peculiar family of *Coniferæ*, but without any living representative.† Dr. Hooker considers it a cryptogamic plant, allied to Lepidodendron.

Sigillariæ attained noble proportions in the Carboniferous period. Sir Charles Lyell men-

* The supposed medullary rays, which have been described in Sigillaria, Mr. Carruthers considers to be the accidental result of desiccation in particular specimens.

† "Archives du Museum d'Histoire Naturelle," tom. i., 1839.

tions an individual seventy-two feet in length, found at Newcastle.* They expand to a breadth of six to eight feet at the base, and from this taper towards the summit. Stems are frequently found standing erect on the roof of the coal, traversing several series of strata.† The character of the foliage is altogether uncertain, but the nature of the root has been clearly demonstrated by Mr. E. Binney, from observations in the Manchester coal-field. Enormous rhizomes, or root-stalks, radiating from a central axis, and spreading horizontally, had frequently been observed and described, under the name *Stigmaria ficoides*. They are covered over by multitudes of small circular indentations, from which emanate carbonized rootlets, penetrating the clay in which the rhizomes are imbedded. They were at first supposed to be a distinct genus of plants; but when Mr. Binney discovered, in the neighbourhood of Manchester, several upright stems of Sigillaria attached by their bases to these spreading rhizomes, it became evident that these portions stood in the relation of stem and root; and fossil-botany now labours under the disad-

* "Elements of Geology," 5th edit., p. 376.

† Several stems were found standing on the upper surface of a coal-seam at Dixonfold, near Manchester.

vantage of having two generic names for different parts of the same plant.*

LEPIDODENDRON.†—This is an abundant and large-sized plant of the Coal-period; one specimen from the Jarrow coal-mine being more than 40 feet in length, and 13 feet in diameter near the base. Notwithstanding its size, it has been shown by Brongniart to have its representative in the diminutive club-moss (Lycopodium) of our mountain heaths. This tribe is generally trailing; but in the neighbourhood of the tropics there are a few erect species, one of which, *L. densum* of New Zealand, attains a height of three feet.

* Several fine specimens are in the geological collection of the Museum of Natural History, Manchester. In one of them the upper part of the stem is a large Sigillaria, the lower part passing downwards into massive rhizomes (Stigmariæ). The internal structure both of the rhizome and rootlet has been very clearly made out by Mr. Binney. The central axis of the former consists of a bundle of large vessels, disposed longitudinally, and surrounded by a zone of cellular tissue with medullary rays. The outer zone or bark next succeeds. The central axis of the rootlet consists of a bundle of polygonal vessels, surrounded by a ring of cellular tissue inclosed in its outer covering of bark.—Journ. Geol. Soc. vol. xv.

† Diagnosis:—"Lepidodendron. Stems dichotomous, covered near their extremities by simple linear or lanceolate leaves, inserted upon rhomboidal areolæ; lower part of the stem leafless; areolæ marked near their upper part by a minute scar."—Lindley and Hutton.)

A fragment of Lepidodendron may be easily distinguished from Sigillaria by the manner in which the leaf-scars are arranged spirally around the stem, giving it a scale-like aspect, from which it derives its name. There are about twenty British species, distinguished by the form and arrangement of these scars.*

In the hollow trunks of Lepidodendra small oval or conical bodies (Lepidostrobi) have frequently been found, often in numbers. They are evidently catkins or fruit-cones; the outer surface was covered by scales or bracts, within which were contained seeds or spore-cases. See Fig. 4.

When enclosed within the trunk, they are found in an erect position: in other words, with their major axis parallel to that of the tree. Dr. Hooker, by a series of careful observations, has shown the Lepidostrobi to be the fruit of the tree itself, and accounts for their presence in the trunks by supposing them to have been washed in by heavy rains and floods when the trunks themselves were standing hollow and decayed.†

* Memoirs of the Geological Survey, vol. ii., part 2, p. 440, with plates.

† In Lord Stamford's museum at Enville there is a specimen of Lepidodendron, collected by Mr. H. Beckett, containing three species of bivalve shells.

The leaves of Lepidodendron were linear, and have been found attached to the stem.* The root is supposed, though without any degree of certainty, to be represented by *Halonia*, a portion of a plant covered with projecting scars spirally arranged, and originally supposed to have been a plant allied to Lepidodendron itself. At the same time, the root has never been found attached, and it is not improbable that *Stigmaria* may have constituted, at least in some of its varieties, the root of both Sigillaria and Lepidodendron.

Fig. 4.



Lepidostrobus ornatus in a nodule of ironstone. In the Bristol Museum. (Hooker.)

Lycopodites.—This was a genus of plants allied to *Lepidodendron*, or probably belonging to it, with pinnated branches, and leaves inserted all round the stem in two opposite rows, not leaving clean and well-defined scars.

The genus *Knorria* of Sternberg no longer exists as such, according to the view of Prof. Göppert, who is of opinion that it is only a form of *Sagenaria* or *Lepidodendron;* and that the

* For figures of which see the "Fossil Flora."

most common species in the Lower Carboniferous Rocks, *Knorria imbricata*, belongs to *Sagenaria Weltheimiana.**

Ulodendron.—A plant of which the affinities are altogether uncertain. It was of considerable size, reaching 2 feet in diameter: the bark is covered with leaf-scars in quincunx order, and is impressed with large circular branch (?) scars at alternate and regular intervals.

Coniferæ.—It is not without significance, as bearing upon the theory of "Development," that coniferous trees formed a very important part of the flora of this ancient period of the world's history; so that, as remarked by Sir C. Lyell, their presence precludes us from characterizing the Carboniferous flora as consisting of imperfectly developed plants, the Coniferæ taking a high, though not the highest, position in the ranks of vegetable organization.†

The prevalent type seems to have been that

* "Ueber die fossile Flora der Silurischen der Devonischen und unteren Kohlenformation," 1859.

† "Elements," p. 374. The late Mr. Hugh Miller has demonstrated the existence of Coniferæ at a much earlier period —that of the Old Red Sandstone of Scotland. See "Footprints of the Creator," p. 199. Prof. Göppert has recently shown that the Coniferæ make their appearance amongst the upper Devonian rocks.—"Journ. Geol. Soc." vol. xvi.

of the Araucarian or Norfolk Island Pine; but seed-cones resembling those of the genus *Pinus* have also been found. One specimen from the Newcastle coal-field is figured by Lindley.*

The Coniferæ of the Coal period differed from those of the present day in the large size of their pith; and the remarkable, and for a long time inexplicable, fossil, found generally in sandstones, known as *Sternbergiä*, has been demonstrated by Professor Williamson to be the pith of these trees.

The little ribbed nodular mass, *Trigonocarpum*, found in great numbers throughout the coal-measures, formerly considered as the fruit of a palm, is now believed to have been that of a coniferous plant, which, like the nut of the yew-tree, was enclosed in a fleshy envelope. With regard to the leaves, it is now believed that some which were formerly supposed to belong to palms, as *Nœggerathia*,† a beautiful fan-shaped frond, were in reality those of Coniferæ, represented in the recent sub-tropical coniferous tree *Salisburia adi-*

* "Fossil Flora," vol. iii., p. 43.

† NŒGGERATHIA.—A genus of plant very abundant in the coal-measures of Germany, and named after the distinguished Professor of the University of Bonn.

*antifolia*. Thus it appears that all evidence of the existence of palms amongst the Carboniferous flora has been obliterated.

These details may appear to some uninteresting; but they serve to show how necessary is a large acquaintance with the vegetation of the present, before we can rightly understand that of the past. An acquaintance, however varied, with the recent botanical productions of our own country, would tend to throw little light on the nature of that flora which flourished upon the same spot so many ages back. The tropics, and even the diametrically opposite portions of the earth, as New Zealand, Australia, and Norfolk Island, have to be searched in order to furnish analogous productions; and where these are sought for in vain, as in the case of several Carboniferous genera, we are at a loss how to picture before our minds those bygone structures of which we find but the defaced ruins.

We have only here described those forms which were most prolific—many more must have existed of which we have no trace. We may, however, fully accept the opinion of Hugh Miller, that this was "a flowerless vegetation." We feel pretty certain on other grounds than the mere absence of their remains, that those orders of

plants which refresh our senses with their flowers and fruits (as these terms are commonly understood) existed not in the true Coal-period. There is every reason for believing that the *Rosaceæ*, *Leguminoseæ*, and a few other tribes adapted to charm the eye and minister to the wants of man, only appeared as the harbingers of man himself; therefore, with all the luxuriance of the foliage, and the denseness and stature of the trees which overspread the great lagoons of the Carboniferous period, the general effect must have been sad and sombre in the extreme. But it persisted, through long ages, in unspeakable loneliness and silence, echoing neither voice nor sound, except when some giant of the forest snapped in twain, and fell heavily into the arms of its companions. The sun shone warmly down by day upon that world, and the moon and stars by night illumined its wide plantations of dark slumberous pine-trees. But man was not there to behold, nor even a mammiferous beast of the field, or bird to fly above in the open firmament of heaven; and only at rare intervals did the sluggish stealthy reptile force a path through the thick jungle. There was a painful absence, throughout the landscape, of the moving creature that hath life.

"Yes! countless years of change have passed since then!
Change to the earth's fair surface, change to men;
Woods, hills, plains, islands, seas, are swept away;
Unnumbered states have crumbled to decay:
While 'neath the soil, a thousand fathoms deep,
The fallen monarchs of the forest sleep." *

## *Fossil Shells of the Coal-series of England.*

The mollusca of the true Coal-measure period are confined to a few genera and species. Bivalves are most numerous, after them Cephalopods, and Gasteropods are rare.

In the upper and middle Coal-measures of England, the most abundant, and frequently the only shells, belong to the genera *Anthracoptera*, *Anthracomya*, and *Anthracosia*, bivalves formerly supposed to be allied to the genus *Unio*, and hence the inhabitant of fresh water.† In some of the beds of shale, however, in the lower Coal-measures of Lancashire, these genera are found associated with the distinctly marine genera

* Oxford University Prize Poem, "Coal," by T. L. Thomas. 1863.

† The late Mr. Salter, by whom the first two of the above names were proposed for the Unio-like shells, states that Anthracosia was covered by a strongly-wrinkled epidermis, like the Myadæ; but altogether unlike the smooth epidermis of the Unionidæ.—Trans. Brit. Assoc., 1861. The genus *Anthracosia* was established by Professor King.

*Goniatites*, and *Aviculo-pecten;* so that they appear to have been of estuarine, and possibly marine, habit.

Amongst the dark shales of the lower Coal-measures immediately overlying the Millstone Grit, fossil mollusca are found often in great numbers, and in considerable variety over the coal-seams. Of the Cephalopods, *Nautili* and *Goniatites* are plentiful; *Orthoceras*, found plentifully near Burnley, in Lancashire. Of the Gasteropods, *Macrocheilus*, *Cypricardia* (De Koninck), and *Loxonema*, all these are scarce. Of the Conchifers, *Axinus*, *Anthracosia* (often associated in the same bed with Aviculo-pecten and Goniatites), *Posidonomya*, *Aviculo-pecten*. This last is most frequently represented by the species *papyraceus*, which occurs in the dark shale overlying some of the coal-seams of Lancashire and Yorkshire. In this position its vertical range is only a few inches; but within these limits the thin flattened valves, impressed on the dark groundwork of the shale, lie so thickly strewn that the form of the shell itself is almost lost, and there only appears a confused assemblage of very fine and sharply-cut ribs, radiating from a number of central points, and crossing each other in mazes of network.

Some of the above genera and species occur amongst the coal-measures of the south of Ireland, ranging through the shales overlying the Carboniferous Limestone upwards into the Coal-bearing strata themselves.*

Of the Pteropods, we find representatives in *Bellerophon* and *Conularia*.

Of the Brachiopods, which are so abundantly distributed in the Lower Carboniferous Rocks, forming, both as individuals and species, the majority amongst the mollusca of the Mountain Limestone, we very rarely find any examples in the lower coal-series of England, with the exception of the *Lingula*. Two or three species of this shell are not uncommon in the shales of Lancashire and the Northern counties. *Spirifer*, *Productus*, *Orthis*, *Athyris*, *and Rhynconella*, have also been found in Lancashire, Denbighshire, Coalbrook Dale, and South Wales.

The Annelids are represented by *Spirorbis*, which is abundant both in the black shales of the lower, and limestone bands of the upper coal-measures.

Tracts of marine worms (*Arenicola*) frequently

* See Explanatory Memoirs to accompany sheets 137 to 147 of the Geological Survey of Ireland; also Griffith's "Geological Map of Ireland."

cover the surfaces of the fine micaceous flag-stones.

The flora of the "Culm," belonging to the Lower Carboniferous series of Devonshire, contain twenty-three species, of which one plant is marine.

Professor Göppert, in his work on the Flora of the Silurian, Devonian, and Lower Carboniferous period, shows that it is very different from that of the Upper Carboniferous, or true Coal-measures.

The Lower Carboniferous series contains 108 species, of which only seven pass upwards, and a single plant, *Neuropteris Loshii*, survived into the Permian period.

## CHAPTER III.

### FORMATION OF COAL.

When Sir William Logan, twenty years ago, was engaged on his great survey of the coal-field of South Wales, he found it to be an invariable rule that every coal-seam reposed on a bed of clay (underclay) penetrated by the rootlets of *Stigmaria ficoides*.* This observation has been extended to every coal-field in Britain; and although the character of the underclay varies considerably, sometimes becoming a hard siliceous stone, yet the presence of the carbonized rootlets shows that it has borne the same relation to the coal as have the softer underclays. This observation of Sir W. Logan established the hypothesis that the plants of which coal is formed grew upon the spot where we now find them mineralized, and that the underclays formed the soil from whence they sprung.

* "Geological Transactions," 2nd series, vol. vi.

Now these underclays are distinctly stratified, showing that they have been deposited under water; and hence it was supposed that in order to become the receptacles for the growth of luxuriant forests, they must have been elevated into dry land; and then, after having been covered by vegetation, again submerged to be overspread by sands and clays and other sedimentary materials which combine to form the strata of the coal-measures. This theory required a series of oscillations over a large extent of the earth's surface, which seemed rather improbable, and not in accordance with observations on changes of level which have been made in various parts of the world. That there are slow elevations, and subsidences of the surface in operation more or less extensively, is proved by phenomena exhibited on our sea-coasts,* where in some cases old sea-beaches are found at elevations far beyond the reach of the waves and in others where forests, and even towns, are known to have been engulfed; and the whole of the geological record teaches us that similar vertical movements have been taking place from the earliest periods.

Along the eastern coasts of South America,

* For many examples, see Lyell's "Principles of Geology."

Mr. Darwin has described the existence of a succession of terraces, rising in tiers from the sea-level up to an elevation of 1,200 feet. He has shown that each of these terraces has in turn been for a long period subjected to the action of the waves, which have swept away a vast quantity of material, and hollowed out caverns in the rock.*

Now as the whole of the land, from the highest terrace down to the level of the ocean, has evidently been under the sea, to have attained its present position it must have been elevated, and each coastline marks a pause in the process of elevation. Here is an example of a constant change of level, with pauses; and it probably furnishes an illustration of Nature's mode of action during the Coal-period. The process, however, in this case must be *reversed*, and instead of periodical elevations it is necessary to infer a slow and gradual subsidence of the sea-bed, accompanied by pauses marked in many cases by the formation of a seam of coal.†

* "Voyage of the Beagle," vol. iii., p. 200.

† This illustration has previously been employed by Mr. Binney, to whom, more than to any author, we are indebted for our present knowledge of the circumstances under which coal has been formed. It is, however, so apt, that I have no hesitation in reproducing it here.

But another question requires elucidation. The coal-seams are associated with strata deposited under water; and all recent investigation strengthens the probability that this water was generally estuarine, sometimes marine. In the northern coal-fields of England, some of the coal-seams are covered by black shales containing remains of fishes and marine shells, as *Goniatites*, *Aviculo-pecten*, *Orthoceras;* and along the coast of Dunbar, in Scotland, bands of limestone, with marine shells, as *Spirifer*, *Productus*, etc., rest upon coal-beds, and on the upright stems of Sigillaria.* In coal-measures belonging to the higher portion of the Carboniferous series, bivalves which were formerly supposed to belong to the fresh-water genus *Unio*, have since been found in the same stratum with *Modiola* and *Aviculo-pecten*. For this genus we adopt the name *Anthracosia* of Professor King,† though believing it to have lived in seas or estuaries. Mr. Binney has shown the probability that the little coiled shell (*Microconchus carbonarius*) is

* These limestones contain fossil representatives of the Carboniferous limestone of England; and it is well known that a portion of the coal-measures of Scotland are of earlier date than those of England.

† Annals and Magazine of Nat. Hist., Jan., 1855.

in reality a coiled *Serpula* or *Spirorbis*, which attached itself to the coal-plants;* and lastly, the minute crustacean abundant in coal-shales, and supposed to have belonged to the fresh-water genus *Cypris*, is with more probability referred to the marine genus *Cythere*. Whilst admitting, therefore, the occasional presence of lacustrine strata associated with the coal-measures, I think we may conclude that the whole formation has been essentially of marine and estuarine origin—a conclusion at which we might arrive on other grounds, when we consider that the formation was at one period continuous over the greater part of Central North America, and would have required for its generation a lake of a size at least six times the area of all the great lakes of that continent united.

There are two conclusions which strike us most forcibly when reflecting on the formation of our coal-fields;—the enormous subsidence of the sea-bed, and the lapse of time it must have required to produce a series of strata, with their coal-seams, in all, several thousand feet in thickness.

Recollecting that every bed of true coal *repre-*

* It is scarcely necessary to remark that Serpula is a marine annelid.

*sents* a land-surface, or at least a sea-level, when we find, as in the case of the coal-field of South Wales or of Nova Scotia, strata with coal-beds through a thickness of 10,000 or 12,000 feet, it is evident that this is a measure of the actual sinking of the sea-bed for this one geological period; or, to take an example:—the height of Mont Blanc is about 15,000 feet; now the vertical displacement which the South Wales coal-field underwent was nearly sufficient to have brought the summit of the Alps to the sea-level.

Of the lapse of time in the formation of our coal-fields we can have but a faint conception; it is only to be truly measured by Him with whom a thousand years are as one day. But the magnitude of the time is only surpassed by the boundlessness of the providential care which laid up these terrestrial treasures in store for His children, whom He was afterwards to call into being. Let me therefore dismiss this subject with one illustration. Mr. Maclaren, by a happy train of reasoning, for which I must refer the reader to his "Geology of Fife,"* arrives at the conclusion that it would require a thousand years to form a bed of coal one yard thick. Now,

* Page 116.

in the South Wales coal-field there is a combined thickness of coal amounting to one hundred and twenty feet, or forty yards, which, according to this hypothesis, would have required a period of 40,000 years for its formation. If we now assume that the 12,000 feet of sedimentary material was deposited at the average rate of two feet in a century, corresponding to the rate of subsidence, it would have required $\frac{12000 \times 100}{2}$ + 40,000=640,000 years to produce this coal-field.*

I have spoken of the difficulty of conceiving frequent *elevations* of the sea-bed during the long period of subsidence in order that a land surface might be laid dry for the growth of vegetation. A much more probable supposition is, that the coal-plants were fitted to grow either partially submerged, or at the sea-level. Analogy would lead us to this conclusion in the case of *Sigil-*

* In this estimate I have adopted a medium between two extreme estimates given by Lyell, "Elements," pp. 386, 387. For a good *résumé* of this subject, see Jukes' "Manual of Geology," p. 95, *et seq.*

Professor Phillips attempts a calculation of the time required for the production of the South Wales coal-field founded on the supposition of the sedimentary materials having been formed at the mouth of a large river, such as the Ganges, and the carbonaceous portions having been stored up at the rate of one inch in 127·2 years; the result arrived at being about half a million of years.—"Life on the Earth," p. 134.

*laria*, *Calamites*, &c., and among the dense forests of larger trees there may have been an undergrowth of reeds and grasses.

The great swamps at the estuary of the Mississippi, and those along the coasts of Louisiana, Nova Scotia, and the tropical lagoons of the African coast, furnish us with the nearest representations of the nature of those forests that have produced our coal-beds; but none of them are strictly analogous. The physical conditions of the Coal-period stand alone, and we cannot but conclude that they were ordained beforehand for a great and evident purpose.

The strata which are associated with the coal consist of sandstones, which were once sand; shales and fire-clays, which were once fine mud. Some of the shales are so highly carbonaceous as to be nearly black, and form impure coal called "bass." Bands of limestone occur in the higher beds of the coal-measures in England, and throughout the greater portion of the formation in Scotland.

The sandstones are frequently rippled, and obliquely laminated, showing the prevalence of currents; they also contain fragments of drifted plants. The shales are generally laminated, showing a slow and tranquil deposition. The

general succession of strata which accompany coal is shown in the annexed section, taken from the neighbourhood of Wigan, and belonging to the lower coal measures, or Gannister series.

Fig. 5.

Succession of Strata in Lower Coal-measures, near Wigan, Lancashire.

Black Shales, with Aviculo-pecten.
Shales, with large calcareous Nodules, containing Goniatites.
Coal. Bullion seam.
Underclay, with Stigmaria.
Sandstone.
Micaceous Shale.
Flaggy, rippled Sandstone.
Micaceous Flags and Shales.
Strong sandy Shale, &c.
Grey Shale, with Modiola, Lingula, &c.
Coal, 16 inches thick, Gannister seam.
Clay and hard Gannister, with Sigmaria.
Shales and Flags.
Micaceous Sandstone.
Shale
Sandstone, with upright stems of Sigillaria.
Shale, with Stigmaria roots.
Tough Shale, with bands of Ironstone.
Dark Shales, with nodules of Ironstones.

Of coal, as a mineral, I must here say a few words. All the coal of the older formations, except the better sorts of "cannel," presents, in a cross-section, a truly laminated aspect, and consists of layers of glossy, bituminous coal, alternating with thinner bands of anthracite. The former class presents no trace of organic structure; while in the latter, under the microscope, the various tissues of Araucaria, Sigillaria, and

other plants, as well as their fructification, may be detected.

There can be no doubt but that this laminated structure is the result of accumulation under water; and Bischof* adopts this view upon other considerations. He says, "The conversion of vegetable substances into coal has certainly been effected by the agency of water." The same great authority believes that coal has been formed, not from the dwarfish mosses, sedges, and other plants which now contribute to the growth of our peat-bogs, but from the stems and trunks of the forest-trees of the Carboniferous period, such as Sigillariæ, Lepidodendra, and Coniferæ.

The earthy portion of coal, which after combustion forms ash, is disseminated in minute particles throughout the entire mass, which could only have occurred by infiltration; but before woody fibre is in a state to admit of the infiltration of sediment mechanically suspended in water, it must have undergone partial destruction. Hence we may conclude that, as the forest-trees successively fell through age or accident, they were immersed in water—which

* "Chemical Geology," vol. i., Messrs. Paul and Drummond's Trans.

must have been shallow, and which held in suspension particles of clay or sand. Mr. H. Taylor gives the following analysis of the ash of a good coal-seam from Newcastle :—

| | |
|---|---|
| Silica . . . . . | 59 · 56 |
| Alumina . . . . . | 12 · 19 |
| Peroxide of iron . . . | 15 · 96 |
| Lime . . . . . | 9 . 99 |
| Magnesia . . . . . | 1 · 13 |
| Potash . . . . . | 1 · 17 |
| | 100 · 00 |

Bischof has shown that this analysis does not much differ from that of many of the shales with which the coal is associated.

The conversion of wood into coal may take place in four different ways; namely,—

1. By the separation of carbonic acid and carburetted hydrogen.
2. „ „ carbonic acid and water.
3. „ „ carburetted hydrogen and water.
4. „ „ carbonic acid, carburetted hydrogen and water.

And from the mean of 67 analyses given by Bischof, it appears that by three of these processes the wood

| Lost | and | Yielded. |
|---|---|---|
| In 1—78 · 0 per cent. | | 22 · 0 per cent. of coal. |
| In 2—57 · 3 „ | | 41 · 7 „ „ |
| In 3—45 · 5 „ | | 54 · 5 „ „ |

The copious discharge of carbonic acid and carburetted hydrogen given off by wood in its conversion into coal, appears to have taken place for the most part during the progress of decomposition in the Coal-period; for it has been found by a comparison of the analyses of true coal with the lignite of the Tertiary strata, that the difference in the per-centage of oxygen and hydrogen in these two classes of minerals is not very great. In lignite the oxygen is only 1·54 per cent., and the hydrogen only 0·38 per cent. less than in true coal. It would therefore appear that, in the long lapse of time between the Carboniferous and Tertiary periods, the coal experienced an extremely slight loss of substance. In the coal-fields these gases are constantly escaping in jets from the shallower seams; but in the deeper parts are pent up at an enormous pressure, and by their elastic force materially assist the miner in his excavations.

*Analysis of* 8 *Specimens of Coal from Newcastle, Glasgow, Lancashire, Edinburgh, and Durham* (*Bischof*).

| Carbon. | | Hydrogen. | | Oxygen & Nitrogen. | | Earths. | |
|---|---|---|---|---|---|---|---|
| Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. |
| 89·2 | 79·1 | 7·2 | 5·3 | 14·5 | 5·5 | 2·9 | 0·5 |

*Analysis of Anthracite from Pembrokeshire, by Schafhäult.**

| Carbon. | Hydrogen. | Oxygen and Nitrogen. | | Earths. |
|---|---|---|---|---|
| 94·10 | 2·39 | 1·34 | 0·87 | 1·30 |

* Dana's "Mineralogy."

*Analysis of Brown Coal (Lignite), from Elbogen.**

| Carbon. | Hydrogen. | Oxygen & Nitrogen. | Earths. |
|---|---|---|---|
| 73·79 | 7·46 | 13·79 | 4·96 |

Of Britain it may be emphatically said, "whose stones are iron, and out of whose hills thou mayest dig brass." Clay-ironstone abounds in the shales of every coal-field, either in the form of nodules or in thin courses. She has also erected more altars to Vulcan than any other country, and the products of her Carboniferous rocks—the coal, ironstone, and limestone—have enabled her to take the foremost place in the industrial arts.

The coal-formation is very frequently traversed by vertical fractures or *faults*, which, within a few yards or feet, completely change the series of strata and the mineral character of the district. These faults are actually vertical dislocations of the rocks, the beds having been upheaved or depressed, as the case may be, tens, hundreds, or even thousands of feet along the line of fracture. Many examples will be produced when we come to treat of the coal-fields; but I may mention that some of the faults which traverse the coal-districts of Lancashire and Staffordshire dislocate the strata to the amount

* Phillips' "Mineralogy."

of 600, 700, or even 1,000 yards! How graphically has that grand old geologist, the patriarch of Uz, described these throes of our great mother Earth: "He putteth forth his hand upon the rock, he overturneth the mountains by the roots!"

The Coal-measures of England rest upon a series of hard and coarse sandstones and shales —called Millstone Grit; this again on a thick series of shales and grits, the Yoredale rocks, which pass downwards by the intermixture of courses of limestone into the great calcareous deposit, the Carboniferous Limestone. This last formation attains in Derbyshire a thickness of 5,000 feet, and is surcharged with marine fossils throughout; indeed, it is almost wholly composed of the shells of mollusca, the calcareous habitations of corals, or the broken skeletons of Crinoidea or "stone lilies." These last must have covered the bottom of the ocean in countless myriads, forming miniature forests, which rose generation after generation upon the accumulating layers of their perished ancestors, until their remains were sufficient to form thick beds of limestone, extending for many miles in every direction. In some parts of Derbyshire and Yorkshire the limestone appears to be composed

of little else than the disjointed skeletons of Crinoidea.

The Coal-measures are overlaid by the Permian formation, consisting of three members: the lower composed of red and purple sandstones, marls, calcareous conglomerate, and breccia; the middle, of magnesian limestone of the north-eastern counties; the upper, of gypseous marls and sandstones. This formation is unconformable to the Coal-measures, and to the Trias which succeeds it.

Next in succession is the Trias, or New Red Sandstone, which, in the absence of the Permian strata, sometimes rests directly upon the Carboniferous rocks. It consists of two members, the Bunter and Keuper; the middle member, the Muschelkalk, being absent in Britain.

The Bunter Sandstone consists of three members: the lower, soft red and variegated sandstone; the middle, quartzose conglomerates and red pebbly sandstone; the upper, soft-streaked and variegated sandstone. Upon this the Keuper series rests unconformably, the upper surface of the Bunter Sandstone being frequently eroded and waterworn. The Lower Keuper Sandstone is introduced by calcareous breccia, and passes upwards into the Red Marl.

We are now in a position to comprehend in some measure the formation of a coal-seam in olden time.

Let us suppose that a certain bed of coal has been completed by the growth of luxuriant plants over a low-lying tract subject to inundations from the sea. Rising ground of granitic, schistose, or other rocks in the distance defines the margin of the basin and the boundaries of a continent from which the sedimentary materials of the coal-strata are derived. That growth of vegetation marks a period of rest; but now a slow subsidence of the whole tract commences. The brackish waters of the estuary and the salt waters from the ocean invade the jungle, carrying dark mud in suspension, with floating stems of trees and fronds of ferns. Presently the mud subsides, and covers in one uniform sheet the accumulated vegetation of centuries. The process of subsidence goes on, while the sea-currents and rivers pour into the estuary fine sand and mud, in which branches and stems of trees from the uplands are included. This process continues until the sinking of the ocean-bed either altogether ceases, or is counterbalanced by the rapidity with which the sediment is deposited. The basin becomes gradually shallower, and the

plants begin to reappear, commencing perhaps at the coast, and creeping seaward until the whole basin is again overspread by a forest of huge cryptogamic trees, arborescent ferns, and conifers. These, generation after generation, flourish and die; their leaves, branches, and trunks falling around and gradually accumulating till the pulpy mass attains a thickness of 20, 50, or 100 feet. The process concluded, the basin again commences to subside, the waters return and bury the mass for hundreds of centuries; stratum after stratum accumulates, till the vegetable pulp is subjected to the pressure of, it may be, thousands of feet of solid matter. Meanwhile, chemical as well as mechanical changes ensue, and in process of time what was once a forest is changed into a bed of coal. By a repetition of this process, with local variations, we may conceive the formation of any number of coal-seams, amounting, in some districts, to fifty or sixty, and embraced within a vertical thickness of several thousand feet of shales, clays, and sandstones. Ages roll on, the strata are moved from their foundations; upheaved from the sea-bottom, the rains, rivers, and currents sweep away a portion of the covering, and the mineral treasures are brought within the reach of mining industry.

The following view of the formations which lie immediately above and below the Coal-measures may prove useful for reference. It is applicable, I believe, to the whole of Britain. The tripartite division for the Coal-measures of England and Wales is not, as yet, generally recognised, but every day's experience tends to make such a division more than probable.

*Tabular View of the Trias, Permian, and Carboniferous Series in England and Wales.*

| | | |
|---|---|---|
| New Red Sandstone or Trias. | Keuper . . | Red marl.<br>Lower Keuper sandstone. |
| | Bunter . . | Upper mottled sandstone.<br>Conglomerate beds.<br>Lower mottled sandstone. |
| Permian Rocks . . . . | | Upper red sandstone of St. Bees', etc.<br>Upper and lower magnesian limestones and marls of the Northern Counties.<br>Lower red sandstone of Lancashire, Cumberland, Yorkshire, etc. (on the same horizon with)<br>Red sandstones, marls, conglomerates, and breccia of the Central Counties and Salop. (Rothe-todte liegende.) |
| Carboniferous Rocks. | Upper Carboniferous | Upper coal-measures, with Spirorbis limestone and thin coal-seams.<br>Middle coal-measures, with thick coal-seams. |
| | Lower Carboniferous | Lower coal-measures or Gannister series, with thin coal-seams and Lower Carboniferous fossils.<br>Millstone grit, with thin coal-seams. |

| | | |
|---|---|---|
| Carboniferous Rocks. | Lower Carboniferous | Upper limestone shale, or Yoredale rocks. |
| | | Carboniferous limestone, with shales, sandstones, and coal in the Northern Counties, and Scotland. |
| | | Lower limestone shale. |

Old Red Sandstone and Devonian Rocks.

Having given a brief sketch of the nature of coal, its origin, and the strata with which it is associated, we are now prepared to pass on to the consideration of the coal-fields.

# PART II.

## CHAPTER I.

### THE GREAT COAL-FIELD OF SOUTH WALES.

The coal-field of South Wales is the largest in Britain, with the exception of that of the Clyde Basin, and contains almost as great a vertical thickness of strata as any coal-field in the world, amounting to upwards of 10,000 feet.

It is separated by Caermarthen Bay into two unequal portions. That to the east of the bay stretches to Pontypool, in Monmouthshire, a distance of 56 miles, and is the larger portion. The smaller extends to St. Bride's Bay, a distance of 17 miles, and is washed by the waves of the Atlantic. The greatest transverse diameter is 16 miles, in the meridian of Neath, in Glamorganshire.

The general form of the coal-field is that of an oval basin or trough, lying nearly east and west. It is deeply indented by the bays of Swansea and

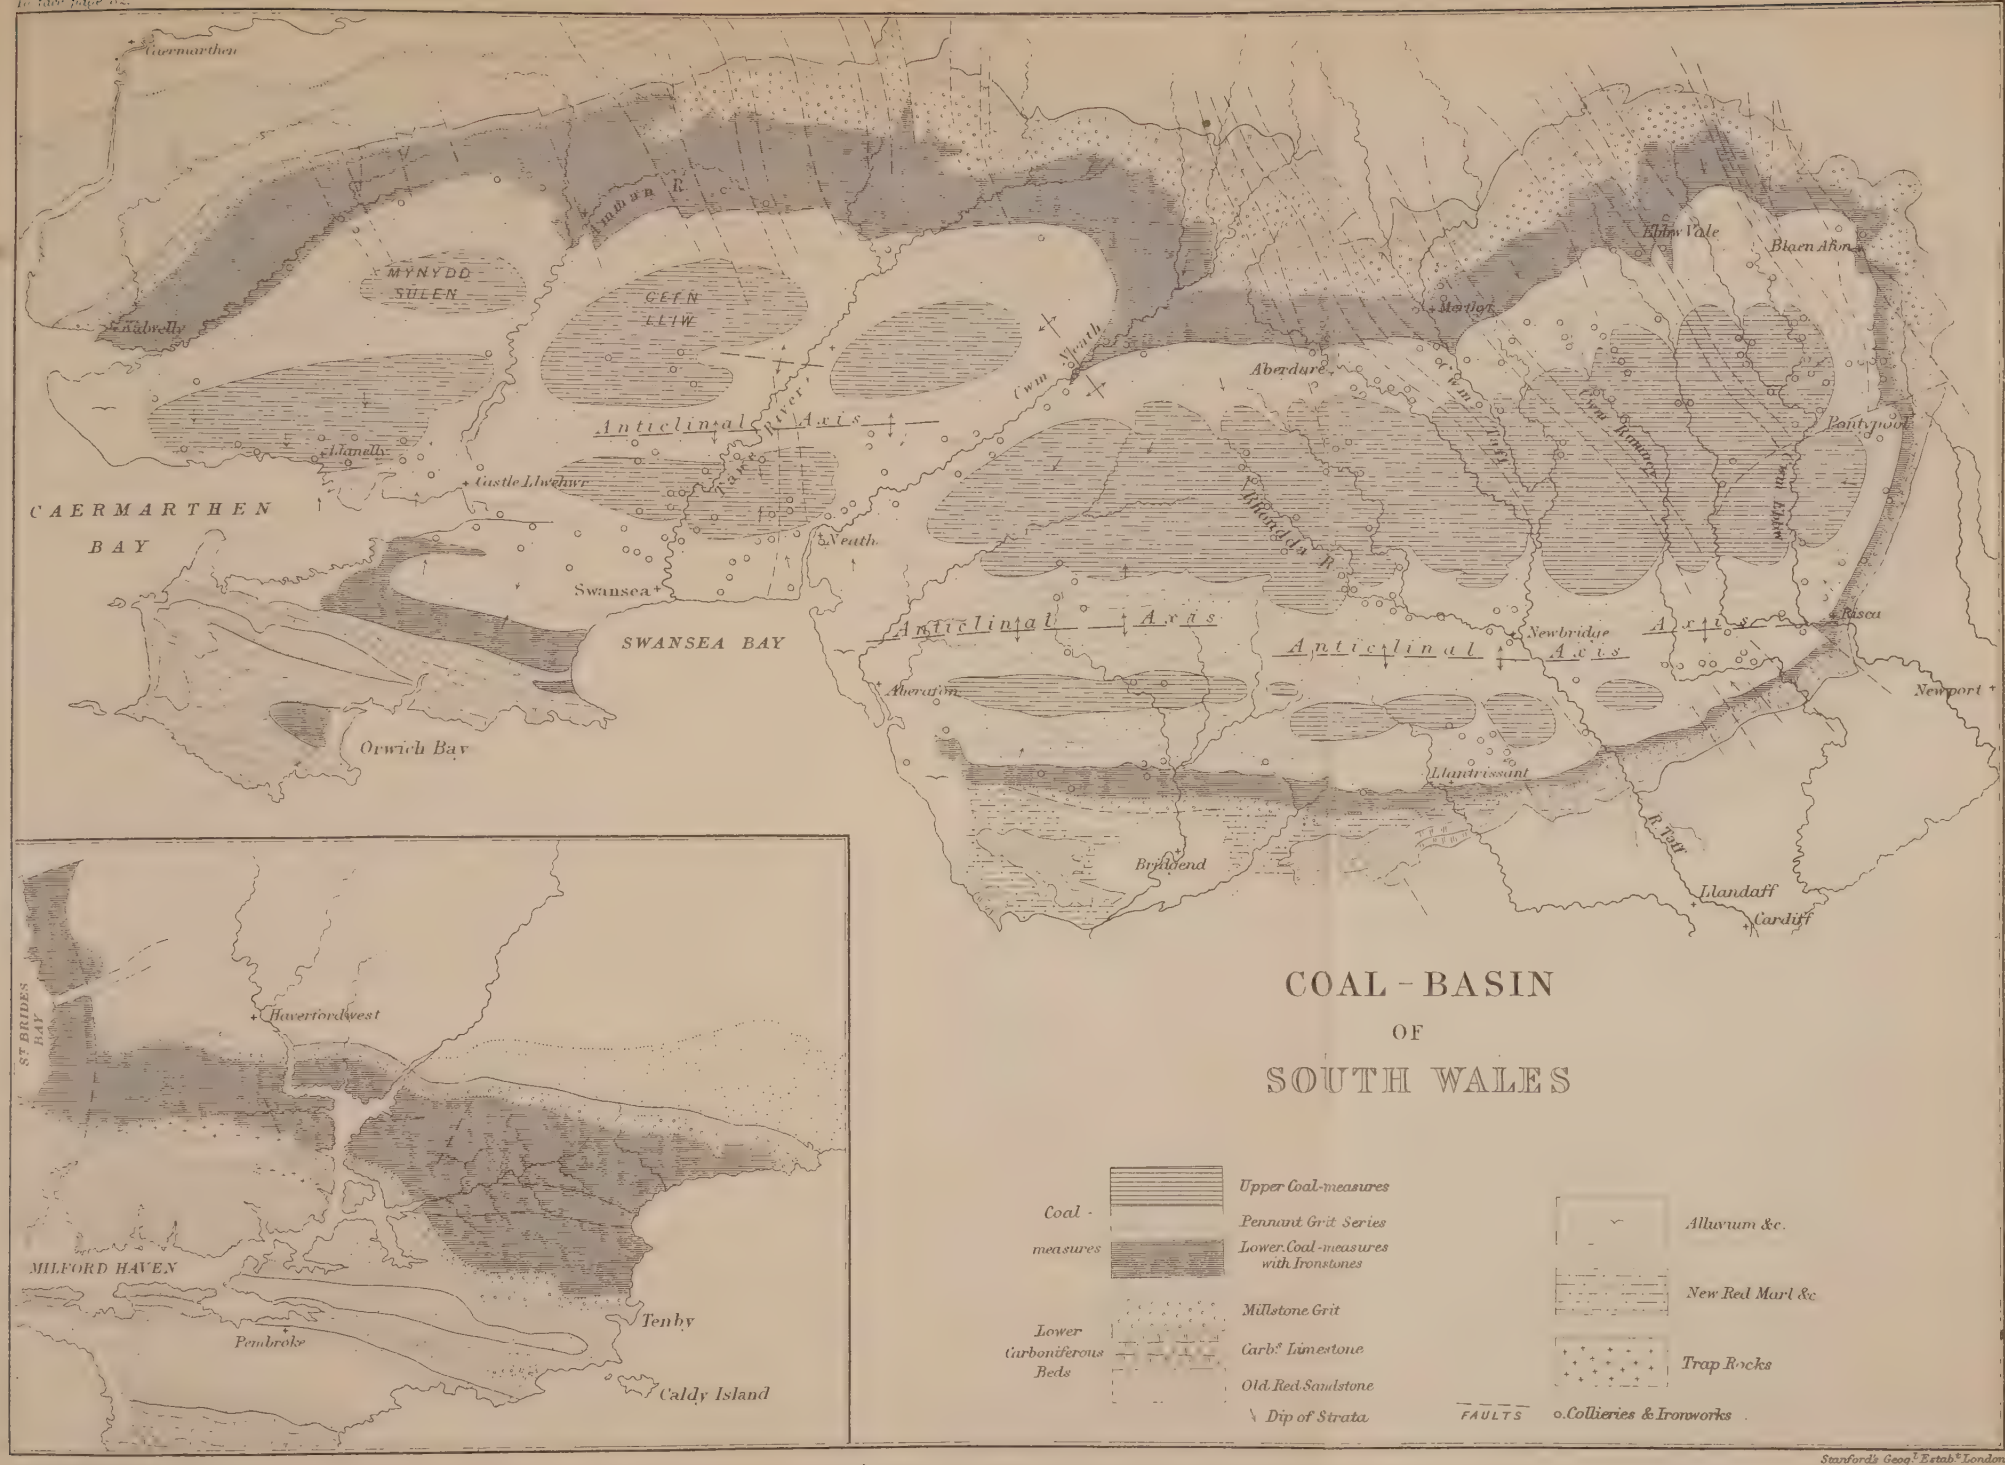


# COAL-BASIN OF SOUTH WALES

Coal-measures
- Upper Coal-measures
- Pennant Grit Series
- Lower Coal-measures with Ironstones

Lower Carboniferous Beds
- Millstone Grit
- Carb.ˢ Limestone
- Old Red Sandstone

\ Dip of Strata

FAULTS

o Collieries & Ironworks

- Alluvium &c.
- New Red Marl &c.
- Trap Rocks

Stanford's Geog.ˡ Estab.ᵗ London.

London: Edward Stanford, 6 & 7 Charing Cross.

Caermarthen, which overspread the upturned edges of the strata as they cross from shore to shore. The beds also rise and crop out towards the north, beyond which the Millstone Grit and Carboniferous Limestone mark the limits of the coal-producing area, often terminating in a series of fine escarpments with northerly aspects.

The coal-field east of Caermarthen Bay is traversed throughout nearly the whole of its length by a remarkable anticlinal axis, which has been traced * from the north of Risca, by Pontypridd and Ton-yr-efail, across the Lesser Ogwr, by Nant-Tyrus, the Masteg ironworks, and Baglan, beneath Swansea Bay. The basin is thus divided into a northern and southern trough, lying on either side of the great anticlinal axis, and of which the former occupies twice the area of the latter. The effect of this axis is to bring the lower coals within reach of mining operations along a considerable tract of country.†

It is also worthy of note that this line of elevation is so placed as to be nearer to the

* Mr. H. Hussey Vivian, M.P., and Mr. G. T. Clark, Rep. Coal-Commissions, vol. i., pp. 1 and 9.

† This flexure is very well represented on the horizontal sections of the coal-field, published by the Geological Survey, and drawn by Mr. Williams and Sir H. de la Beche.

southern side of the basin, where the dip inwards along the margin is steepest; so that, were it not for the existence of this flexure, the lowest seams (which are of great value) would have been placed at depths far beyond the reach of mining operations, within a comparatively short distance of their actual outcrop. The result of this arrangement of the strata, however, is most favourable for their recovery by mining; as, in consequence of the anticlinal, these seams of coal are brought again either near to the surface, or within depths where they may ultimately be rendered available. The effect of this anticlinal is shown, though not to its full extent, by the accompanying section (Fig. 6, p. 86) across the coal-field in a north and south direction. Another anticlinal axis ranging in a parallel direction enters Caermarthen Bay south of Kidwelly.

*Scenery.*—Along its northern border, the coal-field partakes of a mountainous character, rising into lofty tabulated or slightly sloping hills, terminating abruptly, and indented by deep valleys, which often coincide with lines of dislocation, or faults. These valleys, extending inwards in a southerly direction, afford facilities for working the seams of coal by means of adits and galleries stretching far beneath the hills. Be-

yond the limits of the coal-measures, the hard siliceous sandstones and conglomerates of the Millstone Grit form an encircling zone; and from beneath these the still harder rocks of the Carboniferous Limestone rise to the surface, and present towards the north a range of scarped terraces, often broken through by valleys and gorges which have been determined by faults, but on the whole preserving a general direction parallel to the *strike* (direction) of the beds, and attaining elevations of 2,000 feet. Along the southern boundaries of the coal-field, these Lower Carboniferous formations produce rich and varied scenery, but not of so bold and elevated a character as along the northern margin.

It is, as remarked by Mr. Clark, mainly owing to the intersection of the coal-field by the great valleys of the Nedd, Afon, Ogwr, Taff, Rhymney, and Ebbw, and their subordinates, the Ely, Rhondda, Cynon, Sirhowy, and the Afon Llwyd, that there are more than ordinary facilities for working coal economically; as much of it is recoverable simply by driving adits from the outcrop. On this account it is, that the coal-pits are generally shallow as compared with those of the north of England.

*Surveys.*—As far back as the close of the 16th

century, George Owen, a native of Pembrokeshire, drew up a very clear description of the physical features of the South Wales coal-field, tracing the trend of the coal-seams and beds of mountain limestone, and pointing out the relationship of these formations to their representatives in Gloucester and Somerset.* After the completion of the Ordnance Surveys, the geological delineation at first commenced by Sir E. Logan was subsequently completed by Sir H. T. De la Beche and Mr. Williams, during 1837 and following years. They have left us a series of beautifully-executed maps and sections, presenting the details as far as they were discoverable at a time when the coal-field had been very partially explored by mining operations.




Fig. 6.—SECTION ACROSS THE COAL FIELD OF SOUTH WALES.
Length about 20 miles.

A. Coal-measures, with coal. B. Millstone Grit. C. Carboniferous Limestone. D. Old Red Sandstone.

* This work was left behind in MS., but was afterwards published in the "Cambrian Register," and reflects the highest credit on the author.

Of these documents it was stated by one competent to judge, that they at once placed the proprietors of coal-property in the possession of information which it would have taken thirty years to acquire by the advance of mining enterprise.

Very recently a fresh survey has been undertaken for the Royal Coal-Commission by Messrs. H. Hussey Vivian and G. T. Clark, with the assistance of Mr. Evan Daniel, of a very elaborate nature, in which the areas of the different groups of seams, according to depth, are represented on eighteen plans; and furnish us with a complete anatomy of the structure of the district. This work, accompanied as it is by elaborate tables containing the area, thickness, and quantities of coal in each seam, has been one of more than ordinary labour.

*General Succession of Strata, and their thicknesses, in Monmouthshire.*

*Coal-measures.* — Shales, with ironstones; sandstones, including the "Gower series," and *coal-beds*, of which there are about twenty-five more than two feet thick. Total thickness, 11,650 feet.

*Millstone Grit* (Farewell Rock).—Beds of hard sandstone and conglomerate, with partings of shale (Merthyr Tydvil); thickness, 330 feet.

*Carboniferous Limestone.*—Upper beds consisting of alternating dark shales with bands of limestone, passing downwards into massive beds of the latter; thickness, 1,000 feet.

*Old Red Sandstone.*—Conglomerate, red and brown sandstone, marls, and calcareous cornstones, 8,000 to 10,000 feet in thickness.

Westward of Swansea Bay the Millstone Grit disappears, and the Lower Coal-measures rest directly upon the Carboniferous Limestone. At Haverfordwest this latter also vanishes, and inland from St. Bride's Bay the Coal-measures repose on Lower Silurian Rocks.

*Anthracite and Bituminous Coal-Districts.*—It is well known the coal-seams undergo a remarkable change in their extension from the east towards the west. While in the former direction they are bituminous, or gaseous, upon reaching the centre of the area, the same coal-seams become semi-bituminous, or "steam coals," and farther west, gradually pass into anthracite. Sir H. De la Beche states that this change takes place along a plane, dipping gently towards the S.S.E.; so that in the same spot, while the coals at the base of a hill may be anthracitic, those which outcrop along the heights above may be bituminous. Nor is this alteration in the character of the coals accompanied by outbursts of igneous rock, or by violent crumplings and contortions of the beds, as is the case in the Alleghany Mountains of America, where a similar

change has been produced; on the contrary, the strata are usually but slightly thrown out of the horizontal position. Other causes must therefore be sought for.

To the agency of a high internal temperature we must doubtless refer this change in the constitution of the coal-seams. Whenever experiments or observations have been made, it has been found that the temperature increases with the depth; and in the case of the South Wales basin, some of the seams have originally been covered by ten or twelve thousand feet of strata, and their temperature in consequence raised above that of boiling water. Under such circumstances, the gases, we may suppose, would be slowly liberated from the coal-seams, and anthracite would be the result. But how are we to account for this metamorphic action taking place over one portion of the coal-field, and not over the other? This is, indeed, a problem difficult to solve, since the conditions in either portion do not seem to have been materially different. We may offer conjectural solutions of it, such as the greater increase of temperature over the western, or anthracitic, region, as compared with that over the eastern; or that owing to fissures, exceptionally nume-

rous in the western area, greater facility was afforded for the escape of the gaseous products. But none of these reasons are quite satisfactory,* and this remains one of the problems in physical geology which yet await solution.

*Pembrokeshire.* — The western limit of the coal-field, containing only anthracite coal, has been subjected to considerable terrestrial disturbance, which may to some extent account for the change which the coal has undergone. The general structure, along a line drawn from north to south, is represented in the following section, Fig. 7, from a drawing by Mr. Prestwich.†

Fig. 7.—SECTION ACROSS THE PEMBROKESHIRE COAL-FIELD.
Eight Miles.

*m.* Coal-measures.
*n.* Carboniferous Limestone.
*o.* Old Red Sandstone.

* The coal-field of the Donetz in Southern Russia presents phenomena similar to those here described.

† Mr. Prestwich has instituted a just comparison between the flexures of the Pembrokeshire coal-field, and those of the Somersetshire coal-field along the base of the Mendip Hills, with the flexures of the Franco-Belgian coal-trough. Similar views were previously enunciated by Mr. R. Godwin-Austen.

*General Succession of the Coal-series in Glamorganshire and Monmouthshire.*

| | |
|---|---|
| *Upper Pellengare Series, more than* 3,400 *feet.* | 1. Sandstones and shales down to the Mynydd Isslwyn coal,.<br>2. Strata, with twenty-six coal-seams down to the Hughes vein; nine seams over two feet in thickness. |
| *Pennant Grit Series,* 3,246 *feet.* (Swansea.) | Hard and thick-bedded sandstones, etc., with fifteen coal-seams; five over two feet in thickness. |
| *Lower Coal-Measures,* 450 *to* 850 *feet.* | Principally shales, rich in ironstone and coal-seams, of which there are thirty-four in all, and eight above two feet in thickness. |
| *Millstone Grit.* | Represented in the south by the Gower series. |

It will be observed from the above general summary, taken from the Memoir of Sir H. T. De la Beche,* that the richest coal-bearing strata lie at the top and bottom of the formation, the central portion, formed of the Pennant Grit, being comparatively impoverished.

The Lower Coal-measures along the southern borders of the field form a well-marked zone, very rich in coal and ironstone, and distinguished by a remarkable group of fossil shells of marine genera; some of the species—as is also the case

* Memoirs of Geological Survey, vol. i.

in the lower measures of the north of England —having survived from the period of the Carboniferous Limestone. It is a very remarkable fact that these lower measures appear to form the upper limit of this essentially marine fauna, the shells which occur in the higher beds being confined to the genus *Anthracosia* and its allies; and whatever may have been the conditions under which this genus of molluscs lived—whether (as once supposed) in fresh water, or brackish, or marine—the extent of its range, as compared with the Goniatites, Nautili, Pectens, Spirifers, and other shells of the Lower Coal-measures, seems to point to some marked physical difference in the original state of the middle and lower portions of the coal-formation.

The fossils of the Lower Coal-measures are found principally in the ironstones. The coal-seams occur in greatest number and thickness along the southern outcrop, where the series attains a thickness of nearly 1,000 feet.

*Pennant Grit Series.*—The lower measures are surmounted by a great series of sandstones, introduced by the "Cockshoot rock," and included under the general term "Pennant Grit," the same by which this series is designated in

Somersetshire. These sandstones form a fine range of escarpments, often reaching 1,000 feet in elevation; and within these escarpments is enclosed the great central table-land of Glamorganshire, composed of the higher strata of the Coal-measures. Along the deep valleys by which this region is intersected, the coal-beds often crop out, and are worked by tunnelling into the heart of the hills. The whole series of strata, from the uppermost Pellengare beds down to the Millstone Grit, is from 10,000 to 12,000 feet in thickness, containing about eighty seams of coal, of which twenty-five are from two feet upwards, with an aggregate thickness of eighty-four feet of workable coal.* This great series is only surpassed in vertical development by that of Nova Scotia and Saarbrück; and it should be recollected that, as there is no certainty that the original uppermost beds of the Coal-measures are amongst those now existing on the central table-land, we are in ignorance of the actual thickness of the formation as originally deposited.

The following is a complete series of the coal-seams, with their corresponding names or desig-

* The combined thickness of all the coal-seams, small and great, is stated by Professor Phillips to reach 120 feet.

nations, along the north and south outcrop, and their ascertained thicknesses, either individually or in groups. The series commences with the lowest bed, which has, in consequence, the largest area, and terminates with the uppermost.*

*Coal-Seams of the South Wales Basin.*

| Name in ascending Order of each Seam or Vein of Coal, One Foot and upwards in Thickness, contained in each Plan.† | | | Distinguishing the respective Crops of the Veins, with their various Thicknesses. | |
|---|---|---|---|---|
| North Crop. | South Crop, North of Anticlinal. | South of Anticlinal. | Crops. | ft. in. |
| Crowsfoot vein. (Bottom seam.) | Crowsfoot vein. (Bottom seam.) | Crowsfoot vein. | North crop - - | 1 6 |
| | | | South crop (north of anticlinal) - - | 2 0 |
| | | | South of anticlinal - | 2 0 |
| | | | Doubtful, and under the sea - - - | 2 0 |
| | | | Plan No. 1 - - | — |
| Pimp Quart vein. Fach vein. Rhasfach vein. | Rider. Four and Five Feet vein. Coal. | Five Quarters vein. Cribbwr Fawr vein. Cribbwr Fach vein. | North crop - - | 6 6 |
| | | | South crop (north of anticlinal) - - | 10 2 |
| | | | South of anticlinal - | 13 7 |
| | | | Doubtful, and under the sea - - - | 10 2 |
| | | | Plan No. 2 - - | — |
| Hwch vein. Stenllyd vein. Grasuchaf vein. Grasissaf vein. Bresllwyd vein. Gwendraeth vein. Triquart vein. | Four Feet vein. Balance Pit vein. Tusker vein. Clay vein. Big vein (in Wem level) | Three Feet vein. Six Feet vein. Rider. Smoke vein. Rider. Rider. Nine Feet vein. Danllyd vein. | North crop - - | 20 5 |
| | | | South crop (north of anticlinal) - - | 12 6 |
| | | | South of anticlinal - | 30 7 |
| | | | Doubtful, and under the sea - - - | 12 6 |
| | | | Plan No. 3 - - | — |

* This Table is copied from Mr. Vivian's Report, drawn up for the Coal-Commission, vol. i.

† The plans are those referred to in the Report.

*Coal-Seams of the South Wales Basin (continued).*

| Name in ascending Order of each Seam or Vein of Coal, One Foot and upwards in Thickness, contained in each Plan. | | | Distinguishing the respective Crops of the Veins, with their various Thicknesses. | |
|---|---|---|---|---|
| North Crop. | South Crop, North of Anticlinal. | South of Anticlinal. | Crops. | ft. in. |
| White vein.<br>Black vein.<br>Little vein.<br>Harnlo vein. | Coal and Mine vein.<br>Five Feet vein. | Three Feet rider.<br>South Fawr vein.<br>Clay vein.<br>Four Feet vein.<br>Rider.<br>Rider. | North crop - -<br>South crop (north of anticlinal) - -<br>South of anticlinal -<br>Doubtful, and under the sea - - -<br>Plan No. 4 - - | 14 0<br>8 2<br>21 11<br>8 2<br>— |
| Black Mine vein.<br>Soap vein.<br>Coal.<br>Penstwryn vein. | Finery vein.<br>Sulphury vein.<br>Four Feet vein.<br>Truro vein.<br>Rider.<br>Clay vein. | North Fawr vein.<br>Three Feet vein. | North crop - -<br>South crop (north of anticlinal - -<br>South of anticlinal) -<br>Doubtful, and under the sea - - -<br>Plan No. 5 - - | 8 6<br>22 11<br>11 4<br>22 11<br>— |
| Coal.<br>,,<br>,,<br>,,<br>Fforch-y-Garen vein. | Coal.<br>Cockshut rider.<br>Silver vein.<br>Balling vein. | Bwdwr Fach vein.<br>Bwdwr Fawr vein.<br>Sooty vein.<br>Coal. | North crop - -<br>South crop (north of anticlinal) - -<br>South of anticlinal -<br>Doubtful, and under the sea - - -<br>Plan No. 6 - - | 9 9<br>5 3<br>21 5<br>5 3<br>— |
| Nil. | Black vein.<br>Coal.<br>,,<br>,,<br>Golden vein.<br>Cockshut vein.<br>Coal. | Bridge vein.<br>Lantern vein. | North crop - -<br>South crop (north of anticlinal) - -<br>South of anticlinal -<br>Doubtful, and under the sea - - -<br>Plan No. 7 - - | —<br>14 10<br>8 6<br>14 10<br>— |
| Nil. | Cwmbyr vein.<br>Cwmmawr vein. | Small vein. | North crop - -<br>South crop (north of anticlinal) - -<br>South of anticlinal -<br>Doubtful, and under the sea - - -<br>Plan No. 8 - - | —<br>3 11<br>1 6<br>3 11<br>— |

## *Coal-Seams of the South Wales Basin (continued).*

| Name in ascending Order of each Seam or Vein of Coal, One Foot and upwards in Thickness, contained in each Plan. | | | Distinguishing the respective Crops of the Veins, with their various Thicknesses. | |
|---|---|---|---|---|
| North Crop. | South Crop, North of Anticlinal. | South of Anticlinal. | Crops. | ft. in. |
| Coal. | Tormynydd vein. | Double vein. | North crop - - | 9 2 |
| ,, | Jonah vein. | | South crop (north of anticlinal) - - | 12 3 |
| ,, | White vein. | | South of anticlinal - | 3 0 |
| Llyngola vein. | Rider. | | | |
| | Clay vein. | | Doubtful, and under the sea - - - | 12 3 |
| | | | Plan No. 9 - - | — |
| Coal. | Field vein. | Matthouse vein. | North crop - - | 14 10 |
| ,, | Werndû vein. | | South crop (north of anticlinal) - - | 13 7 |
| ,, | Werndû rider. | Rock Fach vein. | South of anticlinal - | 9 4 |
| Goch vein. | Wernpistill rider. | | | |
| Goch vein. | Wernpistill vein. | Rock Fawr vein. | Doubtful, and under the sea - - - | 13 7 |
| Goch vein. | Benson's vein. | | Plan No. 10 - - | — |
| Coal. | Wythien Drewllyd. | Coal. | North crop - - | 3 6 |
| Stinking vein. | Penrhys vein. | Cilddoidy vein. | South crop (north of anticlinal) - - | 9 0 |
| | Pwll Robin vein. | | South of anticlinal - | 7 2 |
| | Coal. | | | |
| | ,, | | Doubtful, and under the sea - - - | 9 0 |
| | ,, | | Plan No. 11 - - | — |
| | | | North crop - - | 3 6 |
| Coal. | Cistern vein. | Bettws Fach vein. | South crop (north of anticlinal) - - | 13 8 |
| William's vein. | Sulphur vein. | | South of anticlinal - | 14 1 |
| | Rotten vein. | Bettws Fawr vein. | | |
| | Hughes vein. | | Doubtful, and under the sea - - - | 13 8 |
| | | | Plan No. 12 - - | |
| | | | North crop - - | 7 8 |
| Coal. | Shenkin vein. | Nil. | South crop (north of anticlinal) - | 12 1 |
| ,, | Six Feet vein. | | South of anticlinal - | — |
| Tresgyrch. | Three Feet vein. | | | |
| | Two Feet vein. | | Doubtful, and under the sea - - - | 12 1 |
| | | | Plan No. 13 - - | — |

*Coal-Seams of the South Wales Basin (continued).*

| Name in ascending Order of each Seam or Vein of Coal, One Foot and upwards in Thickness, contained in each Plan. | | | Distinguishing the respective Crops of the Veins, with their various Thicknesses. | |
|---|---|---|---|---|
| North Crop. | South Crop, North of Anticlinal | South of Anticlinal. | Crops. | ft. in. |
| Coal. | Five Feet vein. | Nil. | North crop - - | 4 0 |
| | | | South crop (north of anticlinal) - - | 4 9 |
| | | | South of anticlinal - | — |
| | | | Doubtful, and under the sea - - - | 4 9 |
| | | | Plan No. 14 | |
| Carnarvon vein. | Carnarvon vein. | Nil. | North crop, 9,860 acres | 8 0 |
| | | | Ditto - - - | 5 3 |
| Carnarvon New vein. | Carnarvon New vein. | | South crop (north of anticlinal), 8,156 acres | 8 0 |
| | | | Ditto - - - - - | 5 8 |
| Penbryn vein. | Penbryn vein. | | South of anticlinal - | — |
| Coal. | Four Feet vein. | | | |
| Coal. | Two Feet vein. | | Doubtful, and under the sea - - - | 5 8 |
| | | | Plan No. 15 | — |
| Rosy vein. | Rosy vein. | Nil. | North crop - - | 9 0 |
| Fiery vein. | Fiery vein. | | South crop (north of anticlinal) - - | 9 0 |
| Golden vein. | Golden vein. | | South of anticlinal - | — |
| Bushy vein. | Bushy vein. | | Doubtful, and under the sea - - - | — |
| | | | Plan No. 16 | |
| Coal. | Penscallen vein. | Nil. | North crop - - | 13 8 |
| ,, | Little vein. | | South crop (north of anticlinal) - - | 13 8 |
| ,, | Broad Oak vein. | | South of anticlinal - | — |
| ,, | Glyngwernen vein. | | Doubtful, and under the sea - - - | — |
| | | | Plan No. 17 | |
| Upper vein. | Upper vein. | Nil. | North crop - - | 11 0 |
| Wythien Ffraith. | Wythien Ffraith. | | South crop (north of anticlinal) - - | 11 0 |
| Wythien Spagog. | Wythien Spagog. | | South of anticlinal - | — |
| Gelly vein, or Wythien Drewllyd. | Gelly vein, or Wythien Drewllyd. | | Doubtful, and under the sea - - - | — |
| | | | Plan No. 18 | — |

*Ironstones.*—The Lower measures are the chief repositories of ironstone, as at Merthyr Tydvil, and at Taffe Vale, near Cardiff. They are seldom more than five inches in thickness, and frequently contain marine shells, fish, and plants. The following is an analysis of the principal bands, made at the Museum of Practical Geology:—

*Analysis of Ironstones.*

| | Carb. Iron. | Earthy Matter. | Metal. |
|---|---|---|---|
| Upper vein, Ystradgynlas | 86·0 | 14·0 | 41·5 |
| Another vein, do. . | 72·4 | 27·6 | 34·9 |
| Cwm Phil vein . . | 75·4 | 24·6 | 36·4 |
| Pendaren Red vein . . | 75·4 | 24·6 | 36·4 |
| ,, Jack vein . . | 55·5 | 44·5 | 26·6 |
| Black-band, Pontypool . | 79·5 | 20·5 | 38·4 |

The yield of these Coal-measure ores, even in conjunction with the hæmatite from the Carboniferous Limestone, is not sufficient to supply the enormous consumption, and large quantities are imported from Northamptonshire, Fawler in Oxfordshire, and other districts. In 1870 there were, in the anthracite district, 9 furnaces in blast, and in the bituminous district, 45 furnaces, producing in all 500,950 tons of iron.

*Faults.*—The fractures which traverse the South Wales coal-field are, in the great majority of cases, referable to one system, nearly perpen-

dicular to the longitudinal axis of the basin, and therefore ranging from N.N.W. to S.S.E. A very few range from east to west. The remarkable parallelism of these fractures, and their direction with reference to the general arrangement of the strata, leave no doubt that they have all resulted from one system of disturbing forces.

### *Fossils.*

The ironstones and shales of the Upper and Middle portions of the Coal-measures contain shells chiefly of the genus *Anthracosia;* but when we descend into the lower strata which overlie the Millstone Grit, we find a series of mollusca, closely resembling and sometimes identical with those of the Lower Coal-measures of the north of England. They are contained generally in the ironstone bands, and were determined by the late Mr. Salter from the collection of Dr. Bevan.*

1. Top.—Black-band ironstone. Fish: *Rhizodus, Megalichthys.* Shells: *Modiola.*
2. *Soap Vein.*—Tracks of *Annelids,* and a new genus of bivalve shells peculiar to the Coal-measures.—*Anthracomya.*

* For description and figures of many of these fossils, see "Iron-Ores of Great Britain," Part iii.

3. Ironstone above "3-quarters Coal."—*Anthracomya.**
4. Ironstone over Bydyllog Coal. — *Athyris planosulcata:* a shell also found in the Carboniferous Limestone.
5. Darin Pins Ironstone.—*Anthracosia, Anthracomya, Myalina* (same species as in the "Pennystone" band of Coalbrook Dale). *Avicula* (*?*).
6. Ironstone over "Engine Coal."—*Spirifer* and *Productus.*
7. "Old Coal" black band. — *Anthracosia acuta,* and *A. ovalis,* both common species in the Coal-measures.
8. Spotted Vein.—Tracks of *Limulus,* a crustacean allied to the King Crab—and *Spirorbis carbonarius.*
9. Bottom Vein.—Fish: *Megalichthys, Rhyzodus, Palæoniscus, Amblipterus, Pleurocanthus, Helodus, Pecilodus, Pleurodus.*
10. Bottom Rosser Vein.—Fossils of the Carboniferous Limestone. *Spirifer bisulcatus, Orthis resupinata, O. Michelini, Conetes Hardrensis, Streptorhynchus crenestria. Productus semi-reticulatus, Edmondia Unioniformis. Axinus Carbonarius. Productus Cora, Conularia quadriculeata, Nautilus falcatus.*

*Entomostraca.* — In certain black-band ironstone strata, lying about thirty yards above the "Rider Coal," in the Pennant series, Mr. W. Adams, of Cardiff, in 1869, discovered some very interesting forms of Entomostraca, figured and described by Professor Rupert Jones, and associated with *Anthracomya* (*unio*) *Phillipsii.* Some of the species are new, and include the genera *Estheria Carbonaria,* and *Leaia.*†

* Established by Mr. Salter. "Iron Ores of Great Britain," Part iii. p. 229.

† *Geol. Mag.,* vol. iii., 214 1870).

*Resources.*

The estimates which I originally gave of the resources of this coal-basin, amounting to 24,000 millions of tons within a vertical depth of 4,000 feet, of which I considered 16,000 millions available, have been considerably exceeded by the calculations of Messrs. Vivian and Clark, who drew up the returns for the Coal-Commission. As these gentlemen have brought to bear, for the determination of this question, appliances and information which no private individual could command, I have no hesitation in accepting the results at which they have arrived in preference to my own; with, however, some slight modifications, the reasons for which I shall now lay before the reader.

The total quantity of available coal * returned by the Commissioners, down to a depth of 4,000 feet, in the South Wales basin, is 32,456,208,913 tons; but in this is included the bottom, or "Crowsfoot" coal, a seam ranging in thickness only from fourteen inches to two feet, and which, being the lowest, is the deepest in the basin. Of this seam Mr. Clark says: "That it is an

* That is, the quantity after making deductions for waste, or loss in working, faults, bad coal, etc.

unimportant seam, being, towards the north end only about sixteen inches thick, and in the south about two feet; and that, except under favourable circumstances, it has not been worked, nor is it worked at present." * Now, can any one suppose for a moment that such a seam as this ever will be worked at depths of over 2,000 feet, or even at more than one-half this depth? If they do, all I can say is, that I do not share their opinion; and therefore, in the estimates of resources which are given below, I have deducted 656,642,000 tons, the amount placed to the credit of the Crowsfoot vein; and which I therefore eliminate altogether from these estimates.

I have also considered it necessary to make deductions on account of thin seams in Mr. Clark's groups, Nos. 4, 5, 6, and 7; in which he states there are seams of coal from one to two feet only in thickness. I cannot believe that such seams can be available at great depths, and I have therefore deducted the quantity credited to these seams at a greater depth than 2,000 feet, amounting to 16,358,000 tons; the total deductions, therefore, will amount to

* Rep. Coal-Commission, vol. i., p. 10.

673,039,000 tons on the quantity of coal returned by the Commissioners within a depth of 4,000 feet.

*Estimate of the Mineral Resources of the South Wales Coal-Basin.*

| | |
|---|---|
| 1. Superficial area of the Basin . | 906 square miles. |
| 2. Greatest thickness of Coal-measures | 10,000 to 12,000 feet. |
| 3. Number of Coal-seams from two feet upwards, 25, giving a thickness of about . . . . | 84 ft. of workable coal. |
| 4. Total quantity of Coal, according to the Commissioners, in round numbers . . . . . | 36,566 millions of tons. |
| 5. Quantity of available Coal under 4,000 feet in depth, remaining after the necessary deductions . | 31,783 millions of tons. |

This, at the rate of production for 1870, of 13,664,112 tons, would be sufficient to last for more than 2,300 years.*

* The statements of Coal and Iron produce are here, and throughout this work, taken from the "Mineral Statistics of the United Kingdom," annually collected by Mr. R. Hunt, F.R.S. (Stanford, London.)

## CHAPTER II.

### BRISTOL AND SOMERSETSHIRE COAL-FIELD.

At an unusually short distance from the base of that range of Oolitic escarpments which stretches in an ever-varying line from Gloucestershire to Dorsetshire, lies the Bristol coal-field.* The thick series of formations which in the midland counties intervenes between the Coal-measures and the Lias, are here, either greatly reduced in depth, or altogether absent; and hence we may pass from the one formation to the other within a distance of a hundred yards. †

The northern part of the coal-field forms a trough lying north and south, narrowing towards its northern limits, and expanding in the opposite

* It ought to be stated that as early as 1730, Mr. Strachey described the coal-districts of Somersetshire in a series of communications to the Royal Society, and from his sections it is evident he understood the relative positions of the Oolite, Lias, Red Marl, to the Coal-measures, and limestone of the Mendips.

† This district is illustrated by the Geological Survey Maps, 19, 35, and Sections, sheets 14, 15.

# SOMERSETSHIRE
## COAL-FIELD

0 1 2 3 4 5 Miles

To face page 104.

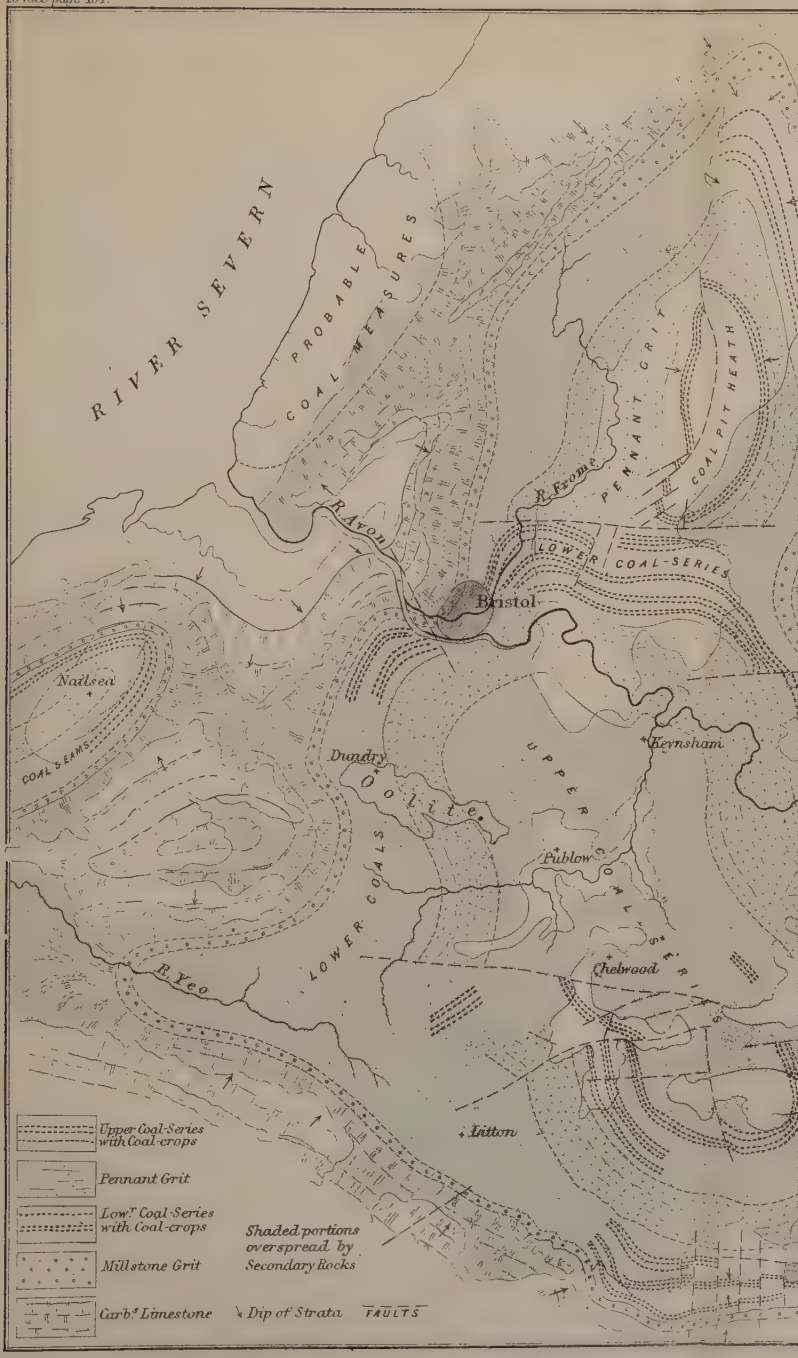


London: Edward Stanford, 6 & 7 Charing Cross.




Fig. 8.—SECTION ACROSS THE BRISTOL COAL-FIELD.

direction, till, east of Bristol, it reaches a width of seven miles. The beds rise at high angles along and beyond the edge of the basin. The Millstone Grit and Carboniferous Limestone form parallel belts. Upon the upturned edges of these more ancient formations the New Red Marl and Lias rest almost horizontally (see Section, Fig 8, p. 105). South of Bristol, the boundary of the coal-field, marked by the range of limestone hills, sweeps round to the westward, and is lost under the sea beyond Nailsea Moor, near Clevedon, in Somersetshire. South of this the Coal-measures underlie the Liassic formations of Dundry Hill, and encircle the large mass of Carboniferous Limestone near Congresbury. Over the greater part of this area the coal-formation is buried at moderate depths under newer horizontal strata.

Along the southern boundary of

the coal-field the Carboniferous Limestone of the Mendip Hills rises to the surface, trending from west to east, till lost beneath the Lias and Oolite, W. of Frome. I am assured, however, by Mr. Etheridge, that the basin-shaped structure of the Carboniferous Rocks under the Lias and Oolite has been thoroughly established by actual sinkings and borings through these newer formations, so that the lowermost coal-shales, or Holcombe Series, do not pass eastward of a line joining Bath and Frome. On reaching Mells, the lowest beds bend round to the North, and take a course through Buckland, Norton St. Philip, Midford, Twiverton (where coal is worked), and North Stoke. It will be observed that this outcrop is in the line of the great N.—S. dislocation, which passes by Chipping Sodbury and Cleeve Bridge, near Doniton.*

The extreme length of this coal-field, from its northern apex at Cromhall to the flanks of the Mendip Hills, is twenty-six miles; the general strike

* I was formerly of opinion, with many others, that the coal-field stretched eastwards from the Mendip Hills under the Oolites, by Bath, Bradford, and Frome, until informed to the contrary by Mr. Etheridge, who is well acquainted with the trials which have been made to prove coal in this direction. It is very probable, however, that the Coal-measures roll in again under the Cretaceous rocks of the Vale of Wardour.

of the beds north of the valley of the Avon being north and south, and over the area south of this line from west to east. About one-half of the northern portion is overlaid by horizontal strata of the Triassic and Oolitic periods, and of the southern part nine-tenths are covered over in this manner; yet the existence of the underlying coal-field is abundantly proved, not only from theoretical considerations, but by actual sinkings for coal. Shafts penetrating the Lias and Red Marl into the coal have been sunk at Paulton and Timsbury; and another near Radstock, commencing in the upper beds of the Lias, reaches coal at 200 fathoms.*

The succession of strata in the neighbourhood of Bristol has been determined by Mr. D. Williams,† and is as follows:—

*Succession of Strata near Bristol.*

| | | |
|---|---|---|
| *Lias* | Lower, Middle, and Upper Lias. | |
| *Trias* | Red Marl. | |
| | Dolomitic conglomerate. | |
| *Coal-Measures* | Upper series, with 22 coal-seams, of which 9 average two feet and upwards in thickness | 3,000 ft. |

* "Lectures on Geology," by Mr. R. Etheridge, 1859. A little book containing much valuable information about the Bristol coal-field; and to its author I am indebted for many details concerning this district.

† Mem. Geol. Survey, vol. i., p. 207.

| | | |
|---|---|---|
| *Coal-Measures* | Central, or Pennant Grit, 5 coal-seams . . . . . | 1,725 ft. |
| | Lower shales, 36 coal-seams . . | 2,000 ,, |
| *Millstone Grit* | Hard siliceous grits, etc. . . | 950 ,, |
| *Carboniferous Limestone* | . . . . . | 2,338 ,, |

There is thus a total thickness of strata with coal of 6,725 feet, separated into two divisions by a series of hard, massive, sandstones (Pennant grit), which will prove a serious obstacle to sinking in search of the lower coals. Of the 63 coal-seams above mentioned only 20 are 2 feet and upwards in thickness, producing 71 feet of coal.*

The Coal-measures have been arranged by Mr. Etheridge under the following subdivisions:†

| | |
|---|---|
| Upper . . | Radstock series.<br>Farrington series. |
| Middle . . | The Pennant series. |
| Lower . . | Bedminster series.<br>Aston, or Holcombe series. |

The Radstock series (see section below) occupies a small area in the southern part of the coal-field between Kilmersdon and Farmborough.

* Mr. Prestwich, F.R.S., who, as one of the Commissioners, has drawn up an able Report on this coal-field, gives the number of seams as 46 with 98 feet of coal. The numbers and thicknesses of the seams depend of course very much on the part of the district where the section is taken. I have adopted Mr. Prestwich's estimates of thickness of the upper and lower coal-series.

† "Lectures on Geology."

The Farrington series forms a much larger area—from Holcombe on the south, to near Brislington on the north, and from Combe Hay on the east, to Chew Magna on the west.

The Bedminster series encircles the last in a band about one mile and a half broad along the east, and on the west occupies the greater part of the flat ground around the limestone inlier of Congresbury and Backwell, stretching to the sea-coast under Nailsea Moor, Kenn Moor, Nempnet, and Puxton. It also forms a greater part of the Northern district.

The lowest series of Holcombe forms a narrow belt lying immediately over Millstone Grit or "Farewell Rock." Along the edge of the Mendips, and at Twiverton, the strata are highly disturbed and dislocated. The seams of the lower series decrease in number and importance, both southward at Nailsea, where they are reduced to twelve, and northward to Yate and Cromhall, where only seven seams exist. They attain their fullest development in the central area.*

The following is the general succession of the Coal-series, for which I am indebted to Mr. Etheridge, and which is very similar to that published by the Geological Survey :—

* Mr. Prestwich, "Report," p. 39.

## *General Coal-series of the Somersetshire Coal-field.*

| North Side. | | | South Side. | | |
|---|---|---|---|---|---|
| | Name of Coal-seam, etc. | Ft. In. | | Name of Coal-seam, etc. | Ft. In. |
| | Red Sandstone and Marl at Coal Pit Heath . . | 270 0 | | New Red Sandstone and Marl . . . . | 120 0 |
| | | | | Dolomitic conglomerate ("millstone") . . | 6 0 |
| | | | | Sandstone and shales . | 240 0 |
| | | | | Withey Mill seam . . | 1 0 |
| | *Radstock Series.* | | | Strata . . . . . | |
| | (Not represented in the Northern district.) | | | Great seam of Clair Down . . . . . | 2 0 |
| | | | | Strata, with two thin seams . . . . . | 67 6 |
| | | | | *Middle seam* . . . . | 1 8 |
| | | | | Strata . . . . . | 100 0 |
| | | | | *Silven vein* . . . . . | 2 6 |
| | | | | Strata . . . . . | 40 0 |
| *Farrington Series.* | *Coal* . . . . . | 1 4 | | *Little seam* . . . . . | 1 6 |
| | Shale and rock, with thin seams . . . | 102 0 | | Strata (*with Bull seam, etc.*) . . . . . | |
| | *Hard Seam* . . . | 3 0 | | | |
| | Shale with coal, 1 ft. | 123 0 | *Farrington Series.* | *Sulphurous coal* . | 2 0 |
| | *Hollybush Coal* . . | 3 0 | | Strata . . . . | 36 0 |
| | Shales and Sandstone . . . . . | 52 0 | | *Cat-head seam* . . | 2 0 |
| | | | | Strata . . . . | 36 0 |
| | *Great Seam* (in three beds) . . . . . | 5 0 | | *Three-seam coal* . | 3 0 |
| | Strata, etc. . . . | 238 0 | | Shales, etc., with *Anthracosia* . . | 54 0 |
| | *Coal* . . . . . | 1 6 | | *Peacock coal* . . | 2 0 |
| | Strata . . . . . | 215 0 | | Shales . . . . | 36 0 |
| | | | | *Shaley seam* . . . | 2 0 |
| | | | | Shales . . . . | 36 0 |
| *Pennant Series.** | Hard sandstone, with a few beds of shale —and three coal-seams, each about two feet in thickness . . . . . | 1500 0 | *Pennant Series.** | Principally hard sandstones, with 5 seams of coal. | 1500 0 |

* Mr. Prestwich states that the Pennant rock has been traversed to a depth of 800 feet, and has probably a mean thickness of not less than 2,000 feet. The following are the seams which it contains. In the Nettlebridge district, the "Globe seam," 3 feet thick, of good quality. In the Bristol district, the "pig seam," 10 inches; the "Millgrit seam," 3 feet to 6 feet, a smith and steam coal; the "rag seam," from 1 to 4 feet; the "devil's seam," 2 feet to 4 feet, of uncertain quality.—Report, 37.

*General Coal-series of the Somersetshire Coal-field.*
(*Continued.*)

| | North Side. | | | South Side. | | |
|---|---|---|---|---|---|---|
| | Name of Coal-seam, etc. | Ft. | In. | Name of Coal-seam, etc. | Ft. | In. |
| *Bedminster Series.* | *Cock-seam* | 2 | 0 | *Small Coal* | 3 | 0 |
| | Sandstone | 42 | 0 | | | |
| | *Hen-seam* | 1 | 6 | *Dead Course*, or shell-seam | 3 | 0 |
| | Strata | 180 | 0 | | | |
| | *Coal* | 2 | 6 | | | |
| | Strata | 540 | 0 | *Garden Course* | 3 | 6 |
| | *Britton's seam* | 1 | 2 | | | |
| | Strata | 300 | 0 | *Strap-seam* | 2 | 6 |
| | *Coal* | 3 | 0 | | | |
| | Strata | 78 | 0 | *Great Course* | 4 | 0 |
| | *Shelly Vein Coal* | 3 | 0 | | | |
| | Strata | 54 | 0 | *Firestone-seam* | 3 | 0 |
| *Holcombe Series.* | *Hard-seam* | 1 | 7 | | | |
| | Sandstone and shale. | 360 | 0 | *Dungy Drift* | 2 | 0 |
| | *Coal* | 4 | 0 | *Hard Coal Drift* | 3 | 0 |
| | Strata | 60 | 0 | *Perkin's Course* | 2 | 0 |
| | *Great-seam* | 4 | 0 | *Foot-coal* | 2 | 0 |
| | Sandstone | 60 | 0 | *Branch-coal* | 4 | 0 |
| | *Coal* | 1 | 6 | *Golden Candlestick* | 2 | 6 |
| | Shale | 120 | 0 | *North Sheets* | 4 | 0 |
| | *Coal* | 2 | 0 | *Cat* (red ash) | 1 | 0 |
| | Shale | 48 | 0 | *South Sheets* | 3 | 0 |
| | *Slate-seam* | 1 | 8 | *Riband-coal* | 1 | 2 |
| | Shale | 24 | 0 | *Standing-coal* | 4 | 0 |
| | *Coal* | 1 | 0 | *Fern Rag* | 2 | 6 |
| | Strata | 24 | 0 | *Stone Rag* | 3 | 0 |
| | *Coal* | 1 | 0 | *Callows-seam* | 4 | 0 |
| | Sandstone | 60 | 0 | *Penrick*, or *Blackstone-coal* | 3 | 0 |
| | *Stoney-seam* | 1 | 4 | | | |
| | Strata | 180 | 0 | *White-axen* (ash) | 2 | 6 |
| | *Coal* | 4 | 0 | *Firestone-seam* | 2 | 0 |
| | Millstone Grit | 180 | 0 | Millstone Grit | | |

Note.—The *terms* used at the sides of the columns are intended to show that the seams, in the North and South area of the Coal-field, are most likely the same under different names, and are here attempted to be correlated.

*Flexures and Faults.*—The Coal-field is divided

into two great parts by a great anticlinal axis, which runs east and west through Kingswood, where it brings the coals of the lower series to the surface, and throws off the Pennant rocks on its flanks. The axis itself is traversed by a number of faults, mostly of uncertain value, by which the workings of the coal-seams are interrupted.

Another great disturbance is one which places the Coal-measures in a vertical position along the northern base of the Mendip Hills, the axis of which is parallel to the former, and ranges east and west. Along this line the Coal-measures are tilted vertically, and have in some cases a reversed dip, so that the coals can often be worked to a depth of 200 or 300 feet perpendicularly, the shaft following the course of the seam. The coal, especially when the dip is reversed, is generally much broken, and often so mixed with shale and stone as to be useless. In connexion with this latter disturbance is the remarkable "slide fault," by which the upper portion of the Radstock series has been thrust almost horizontally for a distance of 130 to 220 feet northward over the lower portion.*

* Mr. Prestwich, Report, vol. i., p. 60.

*Resources.*

In attempting to estimate the future resources of this coal-field, great deductions are unquestionably necessary from the calculated quantity of coal, owing to some general, and some special, circumstances. Excluding all seams below 4,000 feet in depth, we must, I think, omit many of those within this depth, owing to thinness and liability to deterioration in quality. The Pennant rock, which overspreads so large a portion of the lower series of coals, will also undoubtedly prove a serious obstacle, owing to the expense of sinking through it; while the contorted and crushed state of the coal along the southern borders of the field is likely to discourage the working of it at great depths in that district.

Mr. Prestwich, who, with the assistance of Mr. Anstie, has made an elaborate series of estimates for each parish, giving a grand total of nearly 7,000 millions of tons, has rightly appreciated the force of those special difficulties likely to attend future mining operations, and has made considerable deductions in consequence.* Still, I cannot but regard the quan-

* Equal to one-fifth on the quantity in the lower series, after necessary deductions of the usual kind.

tity remaining as in excess of that which may reasonably be calculated upon, owing to the thinness, for the most part, of the seams of coal themselves; as those which are now worked at moderate depths may be quite unworkable when the depth reaches, and exceeds, 1,000 yards. Having premised so much, I shall put the reader in possession of Mr. Prestwich's and my own estimates.

*The Author's Estimate of Resources.*

| | | | |
|---|---|---|---|
| 1. | Area (of which only 45 square miles are not concealed by newer formations) | 150 | square miles. |
| 2. | Greatest thickness of measures with coal | 5,125 | feet. |
| 3. | Number of coal-seams from 2 feet and upwards, 20, giving a thickness of coal of | 71 | ,, |
| 4. | Total original quantity of coal (corrected for denudation) | 4,148 | millions of tons. |
| 5. | Deduct for quantity inaccessible, spoiled, etc., one-third, leaving | 2,766 | ,, ,, |
| 6. | Deduct for quantity already worked out, one-tenth, leaving | 2,489 | ,, ,, |
| 7. | Deduct for quantity below the depth of 4,000 feet, one-fifth; leaving for future supply about | 2,000 | ,, ,, |

*Mr. Prestwich's Estimate.**

| | | TONS. |
|---|---|---|
| 1. | Quantity of coal at a less depth than 1,500 ft. | 1,718,791,280 |
| 2. | ,, ,, between 1,500 and 3,000 ,, | 1,519,997,981 |
| 3. | ,, ,, between 3,000 and 6,000 ,, | 2,227,531,577 |
| 4. | ,, ,, between 6,000 and 8,000 ,, | 637,990,144 |
| | | 6,104,310,982 |

Or, excluding the quantity below 4,000 feet, there remain 4,218,310,000 tons for future use.

The annual output of coal from this coal-field is about 1,000,000 tons, from thirty-four collieries.†

*Concealed Coal-basin under the Estuary of the Severn.*—Mr. Prestwich indicates the existence of Coal-measures under the upper part of the estuary of the Severn, east of Chepstow. These strata have been proved by boring, but to what extent they are coal-bearing is uncertain.‡ The position is shown on the map, (Plate II.)

* Report, vol. i., p. 50.

† Mr. R. Hunt, "Mineral Statistics" (1869).

‡ Map of the Bristol coal-field to accompany evidence of Mr. Prestwich's Report, vol. ii.

## CHAPTER III.

### FOREST OF DEAN COAL-FIELD, GLOUCESTERSHIRE.

The structure and resources of this coal-field are now thoroughly understood. It forms a more perfect "basin" than any other coal-field in England; as the strata everywhere dip from the margin towards the centre, except at one part of the western side, where the oval outline is interrupted for a short distance.*

The Coal-measures are surrounded by belts of Millstone Grit and Carboniferous Limestone, which generally rise considerably above the tract of the Coal-measures they enclose, just as the banks of a lake are higher than the lake itself; and the Carboniferous Limestone in turn rests upon a bed of Old Red Sandstone.† The general

* The Royal Forest covers about 23,000 acres, of which 11,000 are in timber. Deer formerly abounded, but are now almost extinct.

† See Maps of the Geological Survey, 48, S.E. and S.W., and Mr. Sopwith's large Map in the Museum of Practical Geology.

structure resembles that of the South Wales coal-field in miniature, and the transverse section (Fig. 6) illustrates the structure of the coal-basin of the Forest of Dean, as well as that to which it more especially refers.

*Scenery.*—The scenery around the skirts of this coal-basin is rich and varied. The eastern ridge of the Carboniferous Limestone overlooks the Vale of the Severn, and commands the escarpment of the Cotteswold Hills of Gloucester and Somerset. At the opposite side of the coal-field the eye rests upon the Vans of Brecon, 2,700 feet in height, and the ranges which mark the northern bounds of the great South Wales coal-field. The limestone ridge on which you stand is cut into lofty cliffs lining the gorge of the Wye, and in its extension southwards towards Chepstow produces those remarkably terraced cliffs which render the scenery of that part of the river as beautiful as it is peculiar.

The area of the coal-field is about 34 square miles. It contains 15 seams of coal, of which only 8 are of a th[illegible]s of 2 feet and upwards; and the total [illegible], as stated by Sir H. de la Beche, is as [illegible]ws:*—

* Mem. Geol. Survey, vol. i., p. 203.

| | | |
|---|---|---|
| 1. Coal-measures, with 15 coal-seams | 2,765 feet. | |
| 2. Millstone Grit . . . . | 455 ,, | |
| 3. Carboniferous Limestone . . | 480 ,, | |
| 4. Lower Limestone Shale . . | 165 ,, | |
| 5. Old Red Sandstone . . . | 8,000 ,, | or more. |

In the Carboniferous group there is a decrease by two-thirds in the thickness of the strata as compared with the Bristol district. Over the centre of the basin the strata lie nearly horizontally. On approaching the eastern borders they rise very rapidly, but along the opposite, or western edge, the lower beds spread out considerably, and in consequence have a much larger horizontal range than those higher up in the series. The coals are being gradually worked from the margin of the basin, where they crop out, towards the centre, where they are deep; on which account it is probable that progressive mining operations will be much hindered by the accumulation of water in the old workings.

Mr. Richard Gibbs assures me of an interesting fact in relation to the strata of this district. He states that, along a portion of the south-west side of the coal-field, the Millstone Grit and Limestone are overlapped unconformably by the Coal-measures.

*Succession of the Coal-seams.*

| | Ft. | In. |
|---|---|---|
| Sandstones and shales with thin coals | 830 | 0 |
| *Cow Delf* | 0 | 8 |
| Strata | 91 | 10 |
| *Dog Delf* | 1 | 2 |
| Strata | 46 | 9 |
| *Smith Coal* | 2 | 6 |
| Strata | 34 | 6 |
| *Little Delf* | 1 | 8 |
| Strata | 48 | 8 |
| *Park End High Delf* | 3 | 7 |
| Strata | 56 | 0 |
| *Starkey Delf* (with parting) | 2 | 0 |
| Strata | 50 | 0 |
| *Rocky Delf* | 1 | 9 |
| Strata | 77 | 6 |
| *Upper Churchway Delf* (with partings) | 1 | 11 |
| Strata | 34 | 0 |
| *Lower Churchway Delf* | 1 | 6 |
| Strata | 150 | 0 |
| *Braizley Delf* | 1 | 9 |
| Strata | 430 | 0 |
| *Nag's Head*, or *Yorkley Delf* | 2 | 9 |
| Strata | 153 | 0 |
| *Whittington Delf* | 2 | 6 |
| Strata | 137 | 0 |
| *Coleford High Delf* (variable) | 2 to 5 | 0 |
| Strata | 124 | 0 |
| *Upper Trenchard Delf* | 2 | 0 |
| Strata | 72 | 0 |
| *Lower Trenchard*, or *Bottom Coal* | 1 | 4 |

Many of the coal-seams are exceedingly variable in thickness and quality, as I know by painful personal experience. The Coleford

High Delf is subject to rapid fluctuations in thickness, and is so soft that only about 2 feet can be extracted as large coal, the rest being slack or small.

The Forest of Dean in 1870 contained 10 iron furnaces, of which 7 were in blast, producing upwards of 60,000 tons of pig-iron. The ore used is derived from the clay-ironstone of the Coal-measures, from brown hæmatite extracted from the Carboniferous Limestone, and from other extraneous sources.*

*The Horse.*—In one of the coal-seams, called "Coleford High Delf," there occurs one of those interruptions in the regular course of the strata, which tend to throw much light on the original conditions under which coal was formed, but are an occasion of serious loss and disappointment to the proprietor. River channels filled with sand or clay, traversing coal-seams, occur in almost every coal-field, and are known as "rock-faults" and "horse-backs;" but the case to which I have alluded is so remarkable, and has been so fully investigated, that it will serve as a general

* The brown hæmatite accompanies the Carboniferous Limestone which nearly encircles the coal-field, and was worked by the Romans during their occupation of Britain. In 1869 there were extracted 172,023 tons.—Mr. Hunt, Min. Stat., p. 64.

illustration of these phenomena in other districts.* The description is by Sir H. de la Beche,† who says:—The horse with its branches resembles a channel cut amongst a mass of vegetable matter in a soft condition. It ranges S. 31° E. for a length of two miles, and a breadth of 170 to 340 yards. A number of minor channels communicating with each other and the main channel are named "Lows." Mr. Buddle compares the *horse* to the bed of a river, and the *lows* to smaller streams cutting only a lesser depth. The channels are filled principally with sandstone, which extends over the coal-seam, and forms its roof.

*Resources.*

| | |
|---|---|
| 1. Area of coal-field . . . . | 34 square miles. |
| 2. Greatest thickness of Coal-measures | 2,760 feet. |
| 3. Number of coal-seams from 2 feet and upwards, 8, giving a total thickness of . . . . | 24 ,, |
| 4. Total original quantity of coal (corrected for denudation) . . | 842 millions of tons. |
| 5. Deduct for loss and quantity worked out, etc., leaving for future use . | 265 ,, ,, |
| 6. This, at the present rate of production of 500,000 tons,‡ would last for about 500 years. | |

* Mr. Jukes has very fully described these *horses* or *rock-faults* in the "Thick Coal" near Dudley, in his "Memoir on the South Staffordshire Coal-field," p. 45.

† Mem. Geol. Survey, vol. i., p. 156.

‡ Estimate of Mr. Dickinson, one of the Commissioners.—Report, p. 18.

## CHAPTER IV.

### COAL-FIELD OF THE FOREST OF WYRE, WORCESTERSHIRE.

A COAL-FIELD of about as large a superficial extent as that of the Forest of Dean stretches from the northern end of the Abberley Hills, and spreading out under the Forest of Wyre, ultimately becomes contracted northwards to a narrow band lining the banks of the Severn south of Bridgenorth.

The Coal-measures repose on a bed of Old Red Sandstone, consisting of red marls, sandstones, and cornstones (concretionary earthy limestone), and are overlaid by a thick mass of Lower Permian strata, composed of red sandstones and marls with calcareous conglomerates, and marly breccia,* very fully developed at Enville. This Permian breccia has excited much interest

* "Breccia" is a word used to designate strata formed of angular pebbles, "conglomerate" being confined to strata in which the pebbles are rounded or water-worn.

regarding its origin; for Professor Ramsay has shown that it bears a strong resemblance to accumulations originating in glaciers, and spread over the sea-bottom by floating ice; such as that of the Boulder clay of the Glacial epoch. If this theory be correct, a vast change must have come over the climate of these countries between the coal-period and that which immediately succeeds it.

This coal-field has not been fully explored; but, as far as is known, the coal-seams which it contains are both thin, and of inferior quality. The following series occurs near the western margin, as exhibited in Mr. Aveline's section drawn across this district.*

*Section of Coal Strata, Forest of Wyre.*

| | Ft. | In. |
|---|---|---|
| 1. Sandstone and shale . . . | 76 | 0 |
| 2. Coal . . . . . | 1 | 10 |
| 3. Sandstone and shale . . | 24 | 0 |
| 4. Coal . . . . . | 2 | 0 |
| 5. Sandstone and shale . . | 39 | 0 |
| 6. Coal . . . . . | 4 | 0 |
| 7. Sandstone, shale, etc. | | |

* Sections of the Geol. Survey, Sheet 50; also Geol. Map, 55, N.E.

*Section at Harcott Colliery, Clee Hill Common, Forest of Wyre.**

| | Ft. | In. |
|---|---|---|
| 1. Coal-measures | 157 | 0 |
| 2. Blue Bind | 6 | 0 |
| 3. Coal | 1 | 0 |
| 4. Measures | 26 | 0 |
| 5. Black Shale | 1 | 0 |
| 6. Measures | 100 | 0 |
| 7. Coal | 1 | 3 |
| 8. Measures | 12 | 0 |
| 9. Black Parting | 0 | 6 |
| 10. Measures | 5 | 0 |
| 11. Sweet Coal | 4 | 6 |
| 12. Ironstone and Rock | 3 | 0 |
| 13. Coal | 0 | 9 |
| 14. Clod | 0 | 6 |
| 15. Coal | 1 | 8 |
| 16. Black Clod and large balls of Ironstone | 5 | 0 |
| 17. Coal | 6 | 0 |
| 18. Clod | 2 | 6 |
| 19. Coal | 2 | 6 |

The strata of which this coal-field is composed represent merely the upper Coal-measures, which seldom contain beds of coal of much value or thickness. One bed, however, varying from 4 to

* Extracted from a valuable paper by Mr. Daniel Jones, F.G.S., "On the co-relation of certain Carboniferous Deposits of Shropshire," in which he endeavours, not unsuccessfully, to explain the changes which have taken place in the beds from Coalbrook Dale, Harcott, Brown Clee, and Cornbrook.—Geol. Mag., vol. viii., p. 363 (1871).

5 feet, has been traced by the late Mr. G. E. Roberts over a considerable extent of the central part of the coal-field, and is represented in the section below. The absence of the central and lower portions of the formation may be accounted for on the supposition, that this part of England was dry land till near the close of the Carboniferous epoch.

Mr. Roberts has brought to light several very interesting particulars regarding the fossils, both animal and vegetable. In a band of limestone, apparently synchronous with that in the upper Coal-measures of Coalbrook Dale, Warwickshire, and elsewhere, he has found fish-teeth and scales, *Cythere* (*Cypris*) *inflata*, *Spirorbis carbonarius*, and fine specimens of *Posydonia*, determined by Mr. Rupert Jones. But perhaps the most interesting palæontological objects obtained by Mr. Roberts, are specimens of *Pecopteris* and other ferns, retaining their fructification.*

At Arley Colliery, near Bewdley, the strata have been penetrated to a depth of 454 yards, ultimately reaching a mass of basaltic rock. Only one workable coal, at a depth of 176 yards, appears to have been found.

* For further details see Mr. Roberts' "Rocks of Worcestershire."

## CHAPTER V.

### SHREWSBURY COAL-FIELD.

This coal-field forms a narrow band extending from the base of Haughmond Hill, east of Shrewsbury, to the banks of the Severn near Alberbury, a distance of about 18 miles. Like the coal-field of the Forest of Wyre, the coal-strata repose on the older rocks without the intervention of the Millstone Grit and Carboniferous Limestone; but in this instance the fundamental rocks belong to the Cambrian and Lower Silurian periods. Notwithstanding its length, it is seldom more than a mile in breadth; and in its lower part contains two or three coal-seams which have been worked to a small extent, but are not of sufficient value to induce mining operations far from the outcrop.

The Coal-measures are overlaid by Lower Permian strata, consisting of red and purple marls and sandstones, surmounted at Alberbury and

Cardeston by a remarkable stratified breccia,* composed of angular fragments of white quartz, and Carboniferous Limestone, cemented by calcareo-ferruginous paste. The "Alberbury breccia" may be regarded as the remnant of an old shingle beach formed round a coast-line, composed of Carboniferous and Silurian rocks.

In the upper part of this coal-field a band of limestone † occurs with estuarine and marine organisms, some of which were at first supposed to be of fresh-water origin. It contains a small crustacean, *Cythere*, a bivalve shell, *Anthracosia*, and an annelide, *Spirorbis carbonarius*. Now, it is a remarkable instance of the persistency of some calcareous strata over large areas, that this band of limestone, seldom more than a foot in thickness, can be traced in the Coal-measures of Coalbrook Dale and the Forest of Wyre southward, of Lancashire northward, and of Warwickshire eastward, representing an area of about ten thousand square miles; and throughout this expanse it is always found associated with those uppermost coal-strata, which preceded the introduction of the Permian rocks.

* Sir R. I. Murchison, "Silurian System," p. 63.

† This limestone is described by Sir R. I. Murchison ("Siluria," p. 321).

The coal-fields of the Forest of Wyre, the Clee Hills, and Shrewsbury, together with a fourth district extending from the base of Caer Caradoc to within a few miles south of Shrewsbury, are of so valueless a nature in regard to their coal deposits, that I do not consider it necessary to attempt an estimate of their resources. They have all been formed in the vicinity of old land-surfaces, and around lines of coast composed of more ancient rocks. The strata themselves belong generally to the higher part of the coal-series, which throughout England is but sparingly enriched with beds of coal. Their relations to the Coal-measures of Coalbrook Dale have been carefully worked out by Mr. Daniel Jones.*

*The Coal-fields of the Clee Hills, Salop.*

Two small outlying coal-tracts, remnants of a formation which once spread continuously from South Wales and Gloucestershire, are perched on the summits of the Titterstone and Brown Clee Hills in Shropshire, at a height in the latter case of 1,780 feet above the sea, and if

* "On the co-relation of the Carboniferous Deposits of Cornbrook, Brown Clee, Harcott, and Coalbrook Dale."—Geol. Mag., vol. viii., p. 363 (Aug., 1871).

lighted up with the combustible materials with which they are stored, would serve as beacon-fires for many a mile round.

These coal-fields are rather more than a mile each in diameter, and are capped by a bed of hard basalt, to which, owing to its power of resistance to agents of denudation, the hills probably owe their preservation. On these flat-topped hills are planted several small collieries, whose shafts pierce the basalt before entering the coal. The vent from which this igneous rock has been erupted is situated in the Titterstone Clee Hill; and from this orifice the basalt has apparently been poured forth in the form of liquid submarine lava, at some period after the Coal-measures were formed.* The thickness of the coal formation is but small, containing only two or three thin coal-seams, and the strata rest generally directly on Old Red Sandstone; but representatives both of the Carboniferous Limestone and Millstone Grit are interposed at the eastern side of the Titterstone Hill.

I have referred to these districts more on account of their geological interest than for any economical value they may be supposed to possess.

* See horizontal section of the Geological Survey, Sheet 36.

## CHAPTER VI.

### COAL-FIELD OF COALBROOK DALE, SHROPSHIRE.

This coal-field has a triangular form, with its base in the valley of the Severn, near Coalbrook Dale, and its northern apex at Newport. Along its western side it is bounded partly by a great fault, which brings in the New Red Sandstone, and partly by the Silurian rocks of the Wrekin, which rises with its smooth and arched back to the height of 1,320 feet above the sea, and half that amount above the general level of the country around. Along its eastern side the coal-field is bounded by Permian strata, under which the Carboniferous beds appear to pass, but diminished both in thickness and in productiveness of coal.

The general dip of the strata is eastward; and in making a traverse to the foot of the Wrekin we cross in succession the base of the Coal-measures, the Millstone Grit, Carboniferous Limestone, a bed of basalt, and at length reach

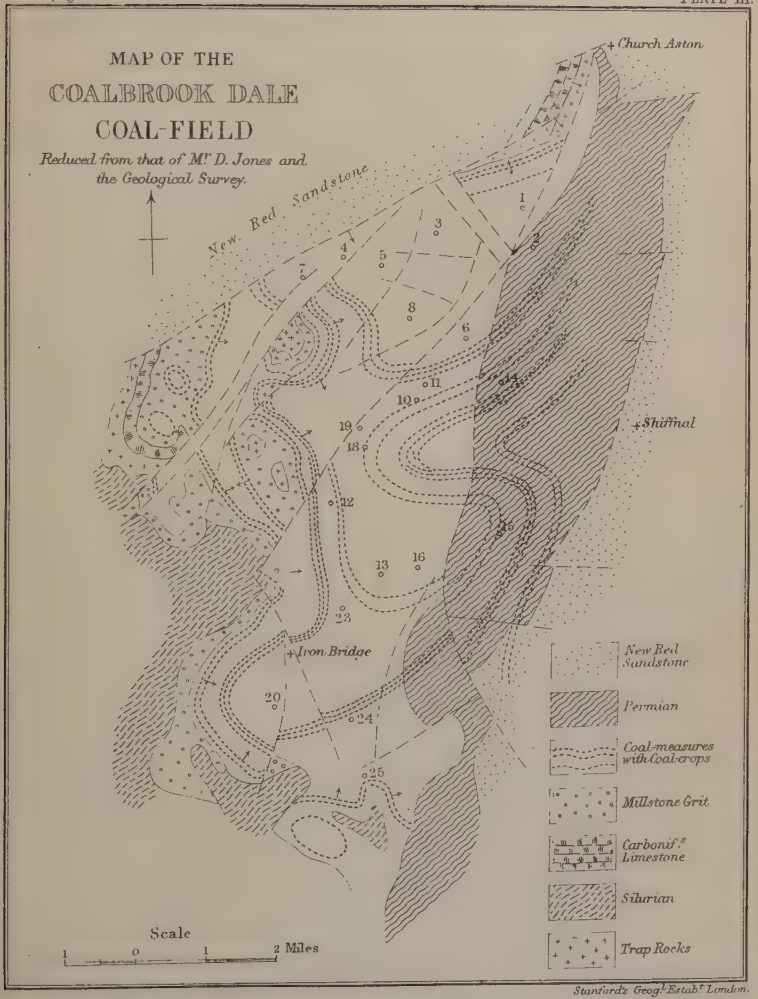


London: Edward Stanford, 6 & 7 Charing Cross.

Silurian rocks, which form the general foundation to the Carboniferous formations in this district. This succession of strata is illustrated by the section (Fig. 8), in which, however, the denudation of the lower measures, and their overlap by the upper, are omitted; the drawing being too small for the insertion of these phenomena.

*Surveys and Descriptions.*—This coal-field is alluded to by the late Sir R. Murchison,* who notices some of its peculiarities; and is the subject of an elaborate memoir by Mr. Prestwich, F.R.S.,† accompanied by a map and numerous sections. It was afterwards surveyed by the officers of the Geological Survey.‡ More recently additional light has been thrown on its structure by Mr. Marcus W. T. Scott,§ Mr. Randall,‖ and Mr. D. Jones.¶ The researches of these gentlemen have thrown much light on the nature of the "Symon fault," and the relations of the Upper to the Lower Coal-measures, and of the Permian rocks to both.

* "Silurian System," p. 86, 1839.

† Geol. Trans. 2 ser., vol. v., 1840.

‡ Geol. Survey Maps, 61, N.E., and Horizontal Section, Sheets 54 and 58, with explanatory notices.

§ Journ. Geol. Soc. Lond., vol. xvii., 457 (1861).

‖ Letters published in the *Mining Journal*, 1871.

¶ Geol. Mag., vol. viii., p. 200 (1871).

## PITS IN THE COALBROOK DALE DISTRICT.

*(Those which are numbered are shown on the Map,* PLATE III. *Reduced from that of Mr. D. Jones.)*

1. Lodgewood.
2. Granville Pit. } Sections by Doody.
3. Donnington Wood.
4. New Hadly.
5. Wombridge.
6. Nelson Pit, Prior's Lee (from Stone Coal). } Geological Survey, Vertical Sections, No. 23.
7. Ketley. Prestwich, p. 445, "I am not aware of its existing farther to south than New Hadley and part of Ketley."
   Wombridge, Townson's Tracts. *Vide* Prestwich.
8. Snedshill. Prestwich, p. 478.
   Edwards Piece, Hadley. Prestwich, p. 480.
   New Hadley. Prestwich, p. 481.
   Tub Engine Pit, Donnington Wood. Prestwich, p. 483.

The following range from the Top Coal, Double and Yard Coals, downwards :—

9. Lawley and Steeraway.
   Horsehays.
   Rickyard Pit, Prior's Lee.
10. Lawn Pit, Malinslee.
11. Pudley Hill.
    Portley Pit, Dawley.
12. Deepfield Pit, Dawley.
13. Madeley Court.

    Geological Survey, Vertical Section, Sheet 23.

14. Stafford Pit. Doody.
15. Kemberton Pit. W. Ward.
16. Halesfield. M. Scott.
    Lightmoor Whinney Pit. Prestwich, p. 475.
17. Little Wenlock. Prestwich, p. 477.
    New Works, New Lawley. Prestwich, p. 477.
18. Langley. (Double Coal.) Prestwich, p. 478.
19. Old Works at Dawley. Prestwich, p. 480.
    Wombridge Pit, near the engine. Prestwich, p. 480.
    Holywell Pits, Malinslee. Prestwich, p. 482.
    Dawley Pit. Prestwich, p. 483.
    Old Park Pits. Prestwich, p. 483.

The following pits range from the Lower Pennystone or Big Flint Coal :—

Hills lane.
20. Broseley. } Vertical Section, Sheet 23.
21. Trial Pit, Castle Green. Prestwich, p. 475.

22. Lodge Pit, Madeley. Prestwich, p. 477.
Trial Pit, near Lilleshall Old Hall. Prestwich, p. 479.
Hemans Pitfield, near Broseley. Prestwich, p. 481.
Yew Tree Pit, Calcut Field, Broseley. Prestwich, p. 481.
23. Meadow Pits, Madeley. Prestwich, p. 485.
Hills-Lane (with the local terms). Prestwich, p. 486.

The following range from the best coal and below :—

Caughley. Vertical Section, Sheet 23.
Limestone Pits, Lincoln's Hill. Prestwich, p. 480.
24. Amies Field, near Broseley. Prestwich, p. 478.
25. Inett. Prestwich, p. 478.

*Succession of Coal-seams, Coalbrook Dale.*

| | | Ft. | In. | | Ft. | In. |
|---|---|---|---|---|---|---|
| 1. Chance Pennystone coal. | (*Found only at north end of Coal-field.*) | | | | | |
| 2. Fungus coal. | | | | | | |
| 3. Gur coal. | | | | | | |
| 4. Top coal | from | 4 | 0 | to | 4 | 6 |
| 5. Half Yard coal | | | | | 1 | 6 |
| 6. Double coal | ,, | 5 | 0 | ,, | 6 | 0 |
| 7. Yard coal | ,, | 2 | 6 | ,, | 3 | 0 |
| 8. Big Flint coal | ,, | 3 | 0 | ,, | 4 | 6 |
| 9. Stinking coal | ,, | 3 | 0 | ,, | 4 | 0 |
| 10. Clunch coal | ,, | | | | 2 | 0 |
| 11. Two feet and Best (with parting) | ,, | | | | 3 | 4 |
| 12. Randle and Clod coal | ,, | 4 | 0 | ,, | 5 | 0 |
| 13. Little Flint coal | ,, | 1 | 6 | ,, | 2 | 3 |

The whole of the above seams of coal are contained in a series of strata about 1,000 feet in vertical thickness.

*The Symon fault; denudation of the Middle and Lower Measures.*—At the time when Mr. Prestwich was engaged in his investigations,

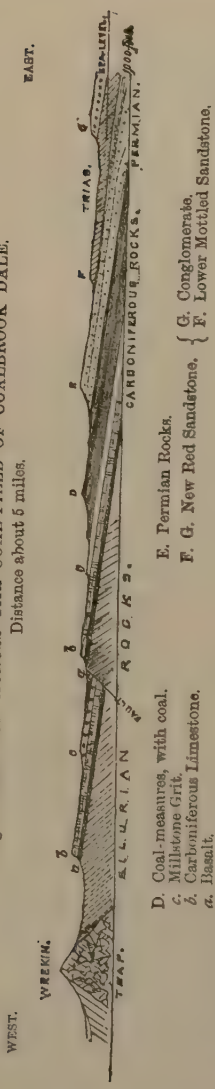


Fig. 9.—SECTION ACROSS THE COAL-FIELD OF COALBROOK DALE.
Distance about 6 miles.

it was known that several of the seams of coal and ironstone had a very limited range, and appeared to die out in certain directions. Thus it appears that the three uppermost seams in the above list of coals are only found in the northern part of the coal-field; that the Top Coal and Yard Coal are limited to the central portions; and finally, that the upper measures with the "Spirorbis limestone" are found at the southern end of the field, within 170 feet (vertically) of the base of the Coal-measures.

The observations of Messrs. Scott and Jones appear very satisfactorily to account for these peculiar conditions. According to their views, founded on actual knowledge of pit-sections and underground works, there has been a considerable amount of denudation of the coal-

series at a certain stage of the coal-period, and after all the strata up to, and including, the "Chance Pennystone" had been formed. In the hollow portions of the coal-field thus formed, the upper coal-measures appear to have been deposited; their junction with the older strata being a sloping bank, or cliff, and the line of separation being marked by the presence of a bed of gravel and a mottled clay locally known as "Calaminker." The relations of these different portions of the same formation will be better understood by reference to the section below (Fig. 10), taken from Mr. Jones's paper, and by the Sketch Map.

*Upper Coal-measures.*—These strata are found extending from the northern portion of the coal-field along the eastern side to the banks of the Severn, and consist of mottled clays, greenish grits, and calcareous gravel or breccia, resembling volcanic ashes. In these beds the remarkably persistent band of compact limestone, with *Spirorbis Carbonareous*, first described by Sir R. Murchison, is found, and has been traced southwards along the valley of the Severn into the coal-field of the Forest of Wyre. The boundary with the Permian rocks along the east appears, in some places at least, to have the character of an inclined bank, due to denudation.

Fig. 10.—SECTION SHOWING RELATIONS OF THE MIDDLE AND UPPER COAL-MEASURES, COALBROOK DALE.

O.C. Older Coal-measures. Y.C. Younger Coal-measures. P. Permian Beds.

The strata of this coal-field are much broken by faults. The largest of these is the western boundary fault; another, the *Lightmoor fault*, traversing the centre of the coal-field from north to south, has a "throw" of about 100 yards: west of this fault the coal-beds are almost exhausted. There are also many transverse fractures.

*Organic Remains.*—These are extremely varied, and have been enumerated in detail by Mr. Prestwich. They occur principally in the iron-stones, of which the principal depositories are the Pennystone and Crowshaw bands. Fish: *Hybodus*, *Gyracanthus formosus*, *Cochliodus*, *Megalichthys Hibberti*, *Pleuracanthus*. Crustacea: *Limulus*, a genus allied to the king-crab; *Glyphea*, *Cypris*, or *Cythere inflata*. Mollusca: *Nautilus*, *Orthoceras*, *Bellerophon*, *Conularia*, *Spirifer bisulcatus*, *Productus scabriculus*, *Aviculo-pecten*, *Anthracosia* (Unio), *Ctenodonta* (or *Nucula*), *Lingula*, *Rhynchonella*. Insects: one

or more species of scorpion; two beetles of the family *Curculionidæ*, and a neuropterous insect, resembling the genus *Corydalis*, and another related to the *Phasmidæ*.*

There are several courses of ironstone measures, which in 1870 yielded 337,443 tons of pig-iron, from 29 blast furnaces; † the Coalbrook Dale and Lilleshall companies being the largest producers.

The coal under a very large portion of this field has been nearly exhausted, as will be apparent to any one who crosses it by the Wolverhampton and Shrewsbury railway, when, over a large area, nothing but dismantled engine-houses and enormous piles of refuse from abandoned coal and iron mines meets the eye. The collieries have gradually migrated from the western outcrop towards the east. Under these circumstances, it is probably within the mark to deduct from the original mass of coal two-thirds for the quantity already worked out. Nearly twenty years back, when Mr. Prestwich was engaged in his survey, the district west of the Lightmoor fault was almost destitute of coal.

* Lyell, "Elem. Geol.," p. 888.

† "Mineral Statistics," 1870.

*Resources.**

| | |
|---|---|
| 1. Area of the coal-field . . . | 28 square miles. |
| 2. Greatest thickness of coal-measures | 1,200 feet. |
| 3. Number of coal-seams of upwards of 2 feet in thickness, 6, giving a total thickness of . . . | 27 feet of coal. |
| 4. Original quantity of coal (corrected for denudation) . . . . | 43 millions of tons. |
| 5. Total quantity worked out and lost, about 25 millions, leaving for future use . . . . . | 18 ,, ,, |

Which, at the present rate of consumption of 1,343,300 tons (1870), would be exhausted in about 13 years.

This estimate only applies to the actual coal-field. As already stated, the Coal-measures pass under Permian and New Red Sandstone along the eastern margin, and already have these rocks been invaded by at least three collieries, namely, the Granville Pits, the Stafford Pits, and the Kemberton Pits.

* I have made very little alteration in my original estimate of the resources of this coal-field, now rapidly approaching exhaustion. Owing to the estimates of the quantity of coal being combined with those of Staffordshire and East Worcestershire, in Mr. Hartley's Returns, published in the Report of the Coal-Commission, I am unable to substitute them for my own. The estimates of the quantity of coal under the district lying between this coal-field and those of South Staffordshire and North Staffordshire, drawn up by Professor Ramsay, amount to 10,380,000,000 tons. This area embraces an extent of 395 square miles.—Report, p. xi.

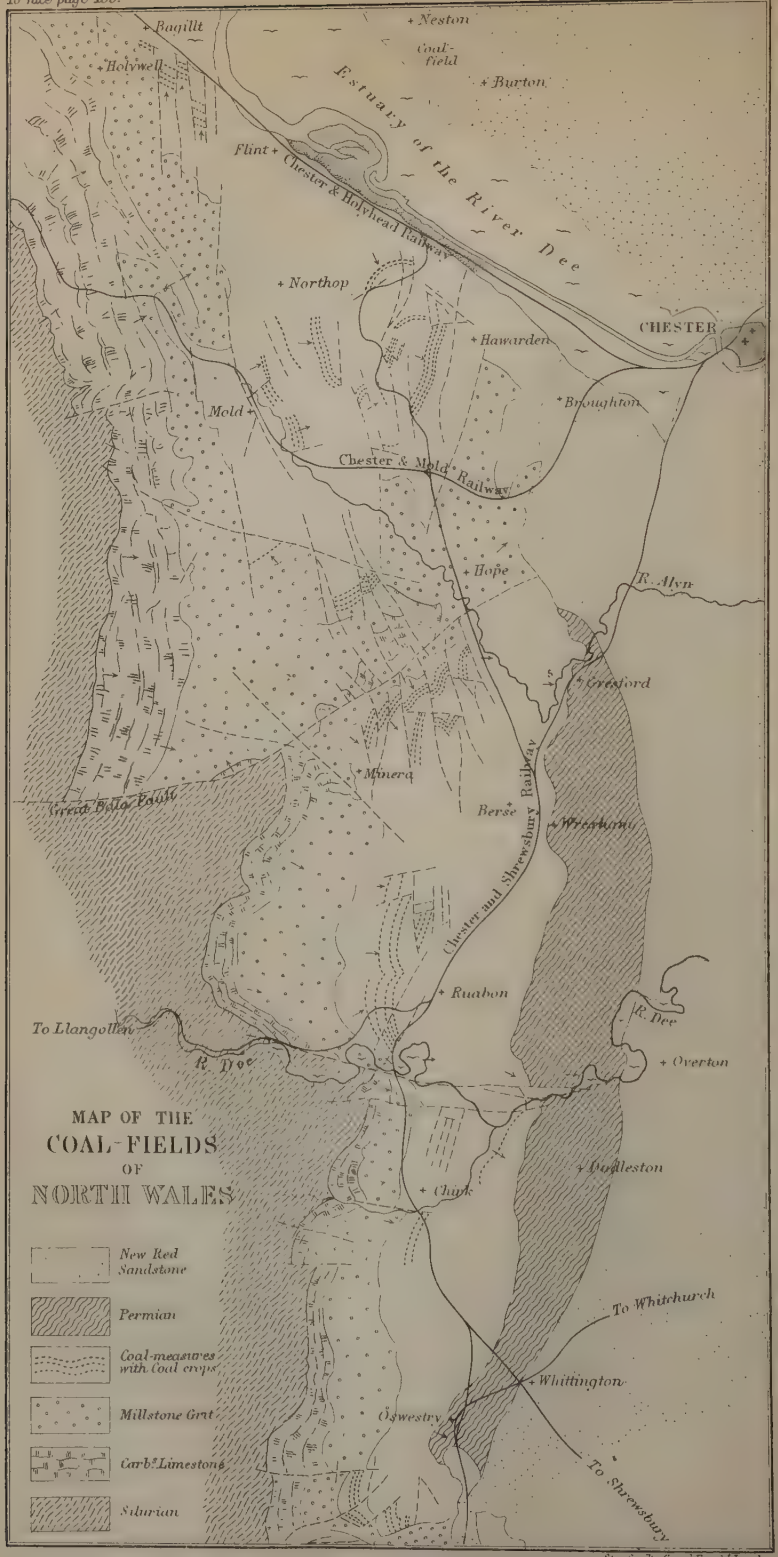
Bagillt
Holywell
Neston
Coal-field
Burton
Estuary of the River Dee
Flint
Chester & Holyhead Railway
Northop
CHESTER
Hawarden
Broughton
Mold
Chester & Mold Railway
Hope
R. Alyn
Cressford
Minera
Berse
Wrexham
Chester and Shrewsbury Railway
Ruabon
To Llangollen
R. Dee
R. Dee
Overton
Dudleston
Chirk
To Whitchurch
Whittington
Oswestry
To Shrewsbury
MAP OF THE
COAL-FIELDS
OF
NORTH WALES
New Red Sandstone
Permian
Coal-measures with Coal crops
Millstone Grit
Carb.ᵉ Limestone
Silurian

# CHAPTER VII.

## THE COAL-FIELDS OF NORTH WALES.

### *General Structure.*

An interrupted tract of Coal-measures extends from the northern slopes of the valley of the Severn, south of Oswestry, to the mouth of the estuary of the river Dee, in Flintshire, crossing the river at the entrance to the Vale of Llangollen. The Coal-measures are overlaid by Permian strata on the south, and New Red Sandstone on the north, and repose on beds of Millstone Grit, Yoredale Shale, and Carboniferous Limestone, each about 1,000 feet in thickness.* These form a range of lofty hills with terraced

* The observations of Mr. Green of the Geological Survey (Geol. Mag., vol. iv., p. 11), and of Capt. Aitken (*Ibid*, vol. vii., p. 263), tend to prove that a portion, at least, of the beds intervening between the lower Coal-Measures of North Wales are referable to the "Yoredale Series," as understood by the officers of the Geological Survey. Mr. D. C. Davies and Mr. W. Prosser have obtained numerous fossil shells, etc. from these beds.

escarpments looking westward, and exhibit a very noble and striking feature when viewed from behind Llangollen, when they assume the form of a long line of ramparts, the strata being piled like lines of masonry, tier above tier. This rampart forms the physical line of demarcation between Wales and England, though the conventional boundary extends into the plain along the eastern slopes.

These calcareous hills are frequently traversed by faults, and are full of lodes rich in argentiferous galena; the most remarkable of which is the "Great Minera vein," coinciding with a line of fault traversing the Denbighshire coal-field from south-east to north-west, and which in 1869 yielded 5,447 tons of ore.

The coal-fields here described form part of the counties of Denbigh and Flint; and north of the valley of the Alyn become separated into two portions, by the upheaval along the line of a great fault of the Lower Carboniferous Rocks.* The tract south of this fault is called the Denbighshire coal-field; that to the north, the

* This is one of the largest faults in Britain, and has been traced from the sea on the coast of Merionethshire, through Bala Lake, into Cheshire. See Maps of Geological Survey, Sheet 74, N.E. and S.W.

Flintshire coal-field—each of which will now be described separately.

## DENBIGHSHIRE COAL-FIELD.

This coal-field commences about three miles south of Oswestry, where the New Red Sandstone begins to rest directly on the Millstone Grit, and extends northward by Oswestry, Ruabon, and Wrexham, to the north of the valley of the Alyn, which winds through a deep defile, and exposes in its banks an almost complete section of the coal-formation. The length of the coal-field is about eighteen miles; and it is about four miles in breadth at Wrexham, where crossed by the section. (Fig. 11, p. 144.)

The general succession of the strata is as follows:—

| | Thickness. |
|---|---|
| 1. Trias, or New Red Sandstone. | |
| 2. Lower Permian rocks (thinning northwards) | 1,200 ft. |
| | 1,000 to 2,000 ft. |
| 3. Coal-measures { 1. Upper series, 1,000 feet. 2. Middle (with coals), 800 feet. 3. Lower (thin coals), 1,000 feet. } | 2,800 ,, 3,000 ,, |
| 4. Millstone Grit and Yoredale Beds | 800 ,, 1,000 ,, |
| 5. Carboniferous Limestone | 1,000 ,, 1,500 ,, |

The Lower Permian strata consist of red

and purple marls and sandstones, sometimes calcareous, and may be seen along the banks of the Dee west of Overton, and in the brook which flows eastward of Wrexham.

The Coal-measures may be classed under three divisions. The upper, consisting of red and grey sandstones and reddish clays, and containing only a few very thin and worthless coals: of these beds there are good sections along the banks of the Alyn, west of Gresford. The middle series constitutes the coal-bearing strata, and contains the following coal-seams of good quality, besides several others not worth mentioning: this series corresponds, with slight variation, to that in Flintshire:—

*Succession of Coal-seams, Denbighshire Coal-field.**

| | Yds. | Ft. | In. |
|---|---|---|---|
| 1. *Top Sulphurous Coal* (not worked) . | 0 | 4 | 0 |
| Strata . . . . . | 70 | 0 | 10 |
| 2. *Bottom Sulphurous Coal* (not worked) | | 4 | 6 |
| Strata . . . . . | 10 | 0 | 7 |
| 3. *Smith's Coal* . . . . . | | 2 | 2 |
| Strata . . . . . | 12 | 1 | 1 |
| 4. *Drowsall Coal* (good quality) . . | | 3 | 0 |
| Strata . . . . . | 9 | 0 | 8 |
| 5. *Powell Coal* . . . . . | | 3 | 3 |
| Strata . . . . . | 9 | 1 | 3 |

* This section was furnished to me by Mr. Napier, Manager of Westminster Colliery, 1859.

| | Yds. | Ft. | In. |
|---|---|---|---|
| 6. *Two Yard Coal* . . . . | | 6 | 0 |
| Strata . . . . . | 11 | 0 | 0 |
| 7. *Crank Coal* . . . . . | | 2 | 8 |
| Strata, with Brassy ironstone . | 10 | 2 | 6 |
| 8. *Brassy Coal* . . . . . | | 5 | 0 |
| Strata, with black-band ironstone, 18 inches . . . . | 10 | 0 | 11 |
| 9. *Main Coal*, with a parting of clay, 15 inches . . . . | | 7 | 5 |
| Total . . . . | 173 | 0 | 8 |

The lower measures contain several coal-seams, varying from 2 to 3 feet, which have been but little sought after in the presence of the thick seams from the middle series.

There are several valuable beds of ironstone, the principal being "the brassy" and "black-band," from which, in the year 1869, 33,431 tons were raised for the Brymbo and Frwd furnaces.

The remains of fish are abundant in this coal-field, and have been classed by Sir P. Egerton under the following genera: *Rhizodus*, *Cœlacanthus*, *Platysomus*, and *Palæoniscus*. The black-band ironstone is very full of fish-scales, teeth, etc., and also contains a bivalve shell of the genus *Anthracosia*. In the Lower Coal-measures the black shales contain *Goniatites* and *Aviculopecten*, as is the case in Lancashire and Yorkshire.




Fig. 11.—SECTION ACROSS THE DENBIGHSHIRE COAL-FIELD.
Length about 6 miles.

1. Upper Coal-measures without coal. 2. Middle Coal-measures with coal. 3. Lower Coal-measures with thin coals.
4. Millstone Grit. 5. Carboniferous Limestone.

Though the Coal-seams are of good quality and thickness, and advantageously placed for working on a large scale, it is only within the last few years that these great resources have become recognised. In 1857 there were no very deep collieries; one of the deepest, Westminster Colliery, from which the section of the strata has been taken, being only 173 yards. Since that time several very deep shafts have been sunk, one of these at Hafod, near Ruabon, belonging to the Ruabon Coal Company, descending to a depth of over 500 yards.*

The production of this coal-field has also greatly increased within the last few years, especially since the opening of the Great Western Railway, which carries the coal direct to the London market. Probably half a million of tons are

* This colliery I had an opportunity of visiting soon after the first shaft had successfully won the Main coal in 1868 or 1869.

transported by this railway alone. In 1858, the quantity of coal raised in the Denbighshire coal-field amounted to only 527,000 tons; it now reaches about one and a half million, from 23 collieries.*

*Resources.*

| | |
|---|---|
| 1. Area of the coal-field . . . | 47 square miles. |
| 2. Greatest thickness of coal-measures | 3,000 feet. |
| 3. Number of workable coal-seams from 2 feet and upwards, 7; giving a thickness of . . | 30 feet of coal. |
| 4. Quantity of coal unwrought, and likely to be clear for working to a depth of 4,000 feet . . | 1,287 millions of tons.† |

* In 1869 the quantity was 1,427,701 tons. ("Mineral Statistics," 1869, p. 129.) In the returns for 1870, the output from all the North Wales collieries is given in one sum, amounting to 2,329,030 tons.

† Estimate of Mr. Dickinson. (Rep. Coal-Commission, vol. i., 18.) My own estimate, as given in the 2nd edit. of this work, was 490 millions of tons to a depth of 2,000 feet, and half as much more to a depth of 4,000 feet.

## CHAPTER VIII.

### FLINTSHIRE COAL-FIELD.

This coal-field is disconnected from that of Denbighshire by the upthrow of Carboniferous Limestone and Millstone Grit over a small tract between Gresford and Hope. From this it extends along the western side of the estuary of the Dee to Point of Aire, a distance of 15 miles; but throughout a considerable part of its range the productive portion is very narrow, and greatly broken by faults.

The general dip of the beds is towards the north-east, and there is no doubt but that they underlie the New Red Sandstone of the Cheshire plain; for they actually reappear on the Cheshire coast at Parkgate, where they are upheaved along a line of fault.*

* Map of the Geol. Survey, 79, N.E. Also Section Sheet 43, with description. For much information regarding this coal-field I am indebted to Mr. Beckett, of Wolverhampton, and to Mr. P. Higson, jun., of Manchester.

The following is the general section of this coal-field:—

| | | Ft. | In. |
|---|---|---|---|
| 1. | *Four-foot coal* { Coal / Cannel } . | 4 | 0 |
| | Strata . . . . . | 41 | 0 |
| 2. | *Bind coal* . . . . | 2 | 6 |
| | Strata, with ironstone . . | 62 | 0 |
| 3. | { *Hollin coal* (in three beds) . | 6 | 6 |
| | { Cannel . . . . . | 1 | 6 |
| | Strata, with ironstone . . | 29 | 0 |
| 4. | *Brassy coal* . . . . | 3 | 0 |
| | Strata . . . . . | 82 | 0 |
| 5. | *Main coal* . . . . | 7 | 0 |
| | Strata . . . . 180 to 300 | | 0 |
| 6. | *Lower Four-foot coal* (in some places, *cannel*) . . . | 4 | 0 |

It will be observed that the *Main* and *Brassy* coals of Flintshire and Denbighshire correspond; that the "Hollin" coal of the former is the "Two-yard" coal of the latter, while the "Powell" coal represents the "Bind" coal. The intermediate ironstone-measures also correspond with those of Denbighshire.

The lower four-foot coal is considered to be the same as the cannel seam of Leeswood, near Mold. It is exceedingly valuable, owing to the large quantity of oil which it yields on distillation; and it is said to yield a larger quantity of gas than the

celebrated Wigan cannel.* Its position is about 100 yards underneath the Main coal, and its character as cannel (or gas coal) is considered to be limited to a comparatively small area. The following is the section of the strata accompanying this seam:—

| | Yds. | Ft. | Ins. |
|---|---|---|---|
| Black shale | 3 | 2 | 8 |
| Light shale | 0 | 0 | 7 |
| Black bass | 0 | 0 | 7 |
| *Top cannel* . 2 ft. to | 0 | 2 | 2 |
| *Curley cannel* . 1 ft. 6 in. to | 0 | 1 | 8 |
| Bad cannel | 0 | 1 | 5 |
| Black shale | 0 | 3 | 0 |

The following is a condensed section of the formation taken at Mold, Flintshire:†—

| | Yds. | Ft. | In. | Yds. | Ft. | In. |
|---|---|---|---|---|---|---|
| Strata from surface | 48 | 1 | 6 | 48 | 1 | 6 |
| *Hollin coal* | 2 | 0 | 2 | 50 | 1 | 8 |
| *Brassy coal* | 1 | 0 | 0 | 71 | 1 | 8 |
| *Rough coal* | 1 | 0 | 0 | 88 | 2 | 2 |
| *Main coal* | 3 | 2 | 0 | 103 | 1 | 2 |
| *Coal* | 1 | 0 | 0 | 107 | 1 | 2 |
| *Coal* | 1 | 1 | 0 | 113 | 2 | 2 |
| Strata, with several seams of ironstone | 20 | 2 | 0 | 134 | 1 | 2 |

* According to the assay of Dr. Andrew Fyfe, the proportions are as follows: Wigan cannel, 12,010 cubic feet per ton; Leeswood curley cannel, 14,280; and Leeswood smooth cannel, 9,972. Of course these proportions are liable to variation.

† For which I am indebted to Mr. H. Beckett, F.G.S.

| | | | | Yds. | Ft. | Ins. | Yds. | Ft. | Ins. |
|---|---|---|---|---|---|---|---|---|---|
| *Coal* | | | | 1 | 1 | 0 | 135 | 2 | 9 |
| *Coal* | | | | 1 | 2 | 0 | 151 | 1 | 9 |
| Shale | | | | 1 | 2 | 0 | 153 | 2 | 9 |
| *Coal* | Coal . 2 0<br>Bass . 0 10<br>Coal . 2 6 | | | 1 | 2 | 4 | 155 | 0 | 1 |
| *Coal* | | | | 0 | 2 | 0 | 179 | 2 | 1 |
| Cannel coal | | | | 1 | 0 | 6 | 196 | 0 | 7 |
| Oil shale, 15 ins.; black-band ironstone, 6 ins. | | | | 0 | 1 | 9 | 196 | 2 | 4 |
| *Wall and Bench coal* | Coal 0 1 0<br>Shale 0 0 6<br>Coal 0 1 4 | | | 0 | 2 | 10 | 219 | 2 | 6 |

In the Lower Coal-measures, below all the strata above-named, Mr. Binney informs me that there are several thin seams with roofs of black shale, containing *Goniatites* and *Aviculo-pecten*, corresponding to the Gannister coals of Lancashire and Yorkshire. These coals are visible in a brook section south of Hope, which in another part displays very beautifully the unconformable superposition of the New Red Sandstone on the Lower Coal-measures.

The strata of the Flintshire coal-field rarely attain a great depth. If we cross the centre of the district from west to east, we find the beds repeatedly upheaved along dislocations ranging north and south. The result is, that the greater portion of the coal being placed so near the

surface has already been exhausted, and probably not more than one-half remains for future use. The valley of the Dee seems to offer favourable positions for deep shafts; and already the coal is being won under high-water mark on Mostyn Bank.

There can scarcely remain a reasonable doubt of the continuation of the coal-formation from Flintshire to Lancashire and Cheshire under the intervening tract of the New Red Sandstone. The Promontory of Wirral, lying between the estuaries of the Dee and the Mersey, may be regarded with little hesitation as a coal-field concealed by New Red Sandstone, in which the depth will be found to depend on the thickness of that formation, the structure of which has been worked out with much care by the Geological Surveyors.* Coal has actually been proved on the east side of the river Dee north of Chester, as well as at Neston; and Mr. Woodhouse has successfully carried down a shaft into the coal-seams at some distance from the shore opposite Bagillt, near Flint.

* This is also the view of the Coal-Commissioners, as expressed by Professor Ramsay.—Report, vol. i., 127.

*Resources.*

| | | |
|---|---|---|
| 1. | Area of coal-field . . . | 35 square miles. |
| 2. | Number of coal-seams at least 6, giving a thickness of . . | 35 feet of coal. |
| 3. | Unwrought and available quantity of coal (including the tract along the estuary of the Dee, and the coal-field of Neston, in Cheshire) * . . . . | 718 millions of tons. |

The quantity of coal raised in 1869 was 725,288 tons, from 32 collieries, a slight increase on that raised in 1859.† The quantity of coal in the actual and visible coal-field can scarcely last more than half a century; but there are doubtless large supplies lying below the New Red Sandstone in the direction of the dip of the strata, and the borders of Cheshire.

* According to the estimate of Mr. Dickinson, "Report, Coal-Commission," vol. i., p. 18. My own estimate of the available coal in the actual coal-field, excluding, of course, the tract along the estuary, made in 1857, was 54 millions of tons.

† In 1870 the number of collieries had increased to 28.—"Mineral Statistics," 1870.

Fig. 12.—SECTION ACROSS THE ANGLESEA COAL-FIELD.
(Reduced from Section of the Geological Survey.)

## CHAPTER IX.

### ANGLESEA COAL-FIELD.

Crossing a mountainous region of 45 miles in breadth from the Flintshire coal-field to the centre of Anglesea we find a series of Carboniferous strata, on the whole, similar to those just described.

The Anglesea coal-field forms a band of country stretching from Hirdre-faig to Malldraeth Bay, a distance of nine miles. Its breadth at Malldraeth Marsh is a mile and a half. The Coal-measures are overlaid uncomformably by red sandstone, conglomerate, and marl, of Permian age; and from beneath the coal-strata the Millstone Grit and Carboniferous Limestone rise in succession, their base resting on highly-contorted and meta-

morphic schists of Cambrian or Lower Silurian age. The existence of this coal-tract is entirely due to an enormous fault, having at one point a down-throw on the north-west of 2,300 feet. On approaching this fault the coal-seams rise towards the south-east at a high angle; and through its agency the Carboniferous strata have been relatively lowered, and are protected on all sides by the ancient Silurian rocks. (See Section 10, page 105.)

The following is the general succession of the strata as determined by Professor Ramsay: *—

*Succession of Strata, Anglesea Coal-Field.*

| | | Ft. | In. |
|---|---|---|---|
| Permian Rocks— | Red sandstone, marl, and conglomerate . . . . . | 195 | 0 |
| Coal-measures— | *Coal* ("Glopux") lying in lumps . | 9 | 0 |
| 1,309 feet. | Shale . . . . . | 51 | 0 |
| | *Coal* . . . . . | 3 | 0 |
| | Shale . . . . . | 63 | 0 |
| | *Coal* . . . . . | 4 | 0 |
| | Strata . . . . . | 75 | 0 |
| | *Coal* (irregular) . . . . . | 2 | 0 |
| | Strata . . . . . | 43 | 0 |
| | *Coal* . . . . . | 6 | 0 |
| | Strata . . . . . | 90 | 0 |
| | *Coal* (with cannel roof) . . . | 1 | 8 |

* Descriptive explanation of Section of the Geological Survey, Sheet 40; also Geol. Map, Sheet 78.

| | | Ft. | In. |
|---|---|---|---|
| | Strata (about) . . . . . | 300 | 0 |
| | *Coal* (supposed Berw Uchaf coal, in three beds, with partings) . | 7 | 6 |
| | Strata . . . . . | 650 | 0 |
| Millstone Grit— | *Coal* (perhaps in Millstone Grit) . | 2 to 3 | 0 |
| | Yellow sandstone and conglomerate | 200 | 0 |
| Carboniferous Limestone. | Gray and black limestone and sandstone, with *Productus*, *Spirifer*, Corals, etc. . . . . | 450 | 0 |

Some of these coal-seams crop up against the base of the Permian strata, proving the great discordance between the formations. A greenstone dyke rises in a line of fault near Berw colliery, but appears not to enter the Permian strata.

Mr. Dickinson estimates that there are 5,000,000 tons of available coal remaining in this little field, which are at present (1869) worked by two collieries, producing about 2,191 tons yearly.*

* From returns by Mr. P. Higson, Hunt's "Mineral Statistics," 1869.

# MAP OF THE SOUTH STAFFORDSHIRE COAL-FIELD

*Reduced from the Maps of the Geological Survey*

Scale of Statute Miles
0 1 2 3 4 5

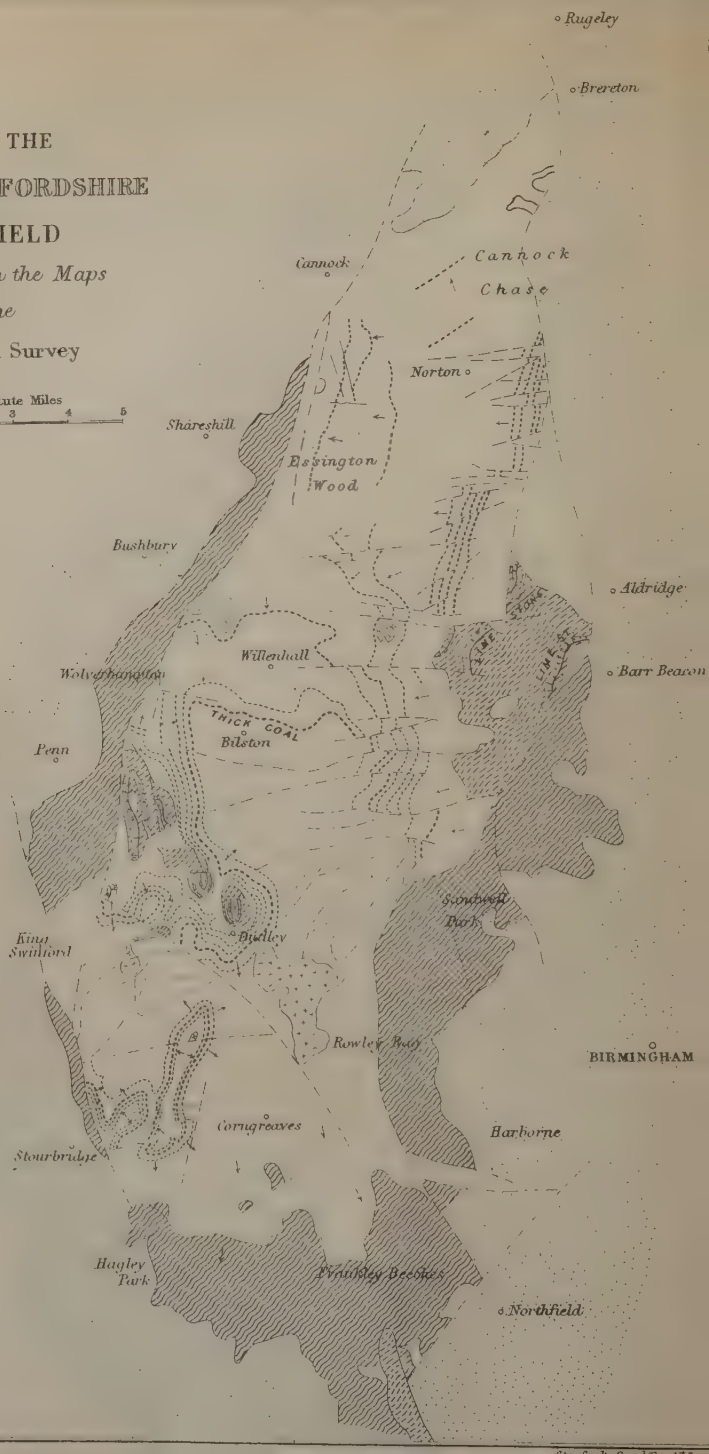

## CHAPTER X.

### SOUTH STAFFORDSHIRE COAL-FIELD.

This coal-field extends from the Clent Hills on the south to Brereton, near Rugeley, on the north, a distance of 21 miles, and is of an average breadth of seven miles. It appears to have been upheaved bodily along two great lines of fracture, which range in approximately parallel directions from north to south. Beyond these lines, Permian and Triassic rocks set in.*

*Aspect of the Coal-field.*—This district has been one of extreme productiveness in coal and iron; and its proximity to the towns of Wolverhampton, Dudley, and Birmingham has imparted an extraordinary impetus to these centres of industrial pursuits. But, indeed, it

* The earliest description of this coal-field appears to have been that of Mr. Kier, the friend of Whitehurst, who produced an able memoir on the coal, limestone, and trap-rocks of South Staffordshire, published in Shaw's History of that county, towards the end of the last century.

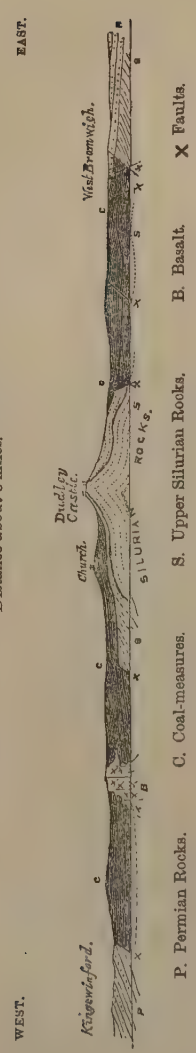


Fig. 13.—SECTION ACROSS THE SOUTH STAFFORDSHIRE COAL-FIELD.
Distance about 6 miles.

may be said that the whole line of country connecting these towns, a distance of 12 miles, forms one great workshop; and on a fine night, the spectacle from the walls of Dudley Castle, which rises from the centre of the coal-field, is one which has scarcely a parallel. The whole country within a radius of five or six miles is seen to be overspread by collieries, iron-foundries, blast-furnaces, factories, and the dwellings of a dense population; and, from amidst the thick smoky atmosphere, the tongues of fire from the furnaces shoot up an intermittent light which illuminates the whole heavens. But the spectacle before our eyes does not represent the whole sum of human labour; for whilst ten thousand hands

*Note.*—The Section at the side of this page is reduced from one by Mr. Jukes.

are at work above ground, one-half as many, perhaps, are beneath the surface, hewing out the coal which is to be the prime mover of the whole machinery in motion above ground.

*Physical Geology.* — It has been shown by the late Mr. Jukes,* that while the Lower Carboniferous rocks were being deposited over other parts of England, a band of country stretching from Shropshire across South Staffordshire and Warwickshire was dry land. Consequently there is no Carboniferous Limestone or Millstone Grit; and the Coal-measures repose directly on an eroded surface of Upper Silurian rocks, which, at Sedgley, Dudley, and Walsall, rise from beneath the coal-formation in a series of isolated hills. These bosses of Silurian rocks indicate the proximity of that ridge of land which formed the original limit towards the south of the coal-formation of this part of England, and which is now known to stretch beneath the Permian formation under the Clent Hills in an east and west direction. This ridge was reached in shafts sunk, by the Messrs. Dawes at Wassel Grove and Manor Farm, in search of

* "South Staffordshire Coal-field," Mem. Geol. Survey, 2nd Edition (Preface). See Geol. Maps, 62 S.W., 62 N.W., and corresponding Sections.

the thick coal; it having been assumed that the coal-beds to the north of Hales Owen would be found to extend southwards beneath the Permian Rocks. No seams, however, of any importance were found in the shafts; but, at some distance down, beds of gravel and *débris* of Silurian rocks were encountered, mingled with fragments of Carboniferous plants. Below these the Upper Silurian rocks were pierced for some depth.* These phenomena, so discouraging to the enterprising proprietors, yet so full of interest to the physical geologist, are capable of explanation on the supposition that the shelving shore, or margin of the Carboniferous area formed of Silurian rocks, was here reached. Another ridge of Silurian rocks has been found beneath the Permian strata along the eastern margin of the coal-field, and was first described by Sir R. Murchison.†

* Professor Ramsay, Coal-Commission Report, vol. i., p. 120. An account of these trials was given by Mr. Henry Johnson, at a meeting of the "Mine Agents' Association," held in Dudley, in 1868. The cost of the two experiments was about £25,000.

† "Silurian System." Mr. H. Beckett, F.G.S., informs me, however, that at their new colliery, at Hales Owen Abbey, the Messrs. Dawes have proved the "Thick coal," though not of its full thickness.

*Succession of Formations and Coal-series.*

The general succession of the strata, as given by Mr. Jukes, is as follows :—

| | | Ft. | |
|---|---|---|---|
| Trias—Bunter Sandstone, 1,200 | 1. Upper mottled sandstone | 500 | |
| | 2. Conglomerate beds . | 500 | |
| | 3. Lower mottled sandstone | 200 | |
| | | | 1,200 |
| Permian [Lower Division] 1,000 to 3,000 | 1. Breccia of felstone, porphyry, and Silurian rocks. | | 1,000 to 3,000 |
| | 2. Red marls, sandstone, and calcareous conglomerate. | | |

*Coal-measures—Southern District.*

| | | Ft. |
|---|---|---|
| Upper Coal-measures—1,300 | Red and mottled clays, red and grey sandstone and gravel beds | 800 |
| Middle Coal-measures—510 . | 1. *Brooch coal* . . . . | 4 |
| | Strata, with ironstone . . | 130 |
| | 2. *Thick Coal* . . . . | 30 |
| | Strata, with "Gubbin ironstone" | 20 |
| | 3. *Heathen Coal* . . . | 4 |
| | Strata, with ironstone . . | 109 |
| | 4. *New Mine Coal* . . . | 8 |
| | Strata, with ironstone . . | 16 |
| | 5. *Fire-Clay Coal* . . . | 7 |
| | Strata . . . . | 30 |
| | 6. *Bottom Coal* . . . . | 12 |
| | Strata, with several courses of ironstone . . . . . | 140 |

Upper Silurian Rocks
1. Ludlowrocks, with Aymestry Limestone.
2. Wenlock and Dudley Limestone and Shales.
3. Woolhope Limestone (?).
4. Landovery Sandstone.

*Coal-Seams.*—From the above list it will be seen, that in the Dudley district there are six workable seams of coal, giving a total thickness of 65 feet. The most remarkable of these is the "Ten-yard," or "Thick coal," of a general thickness of 30 feet, and a source of enormous wealth to the district. It underlies a large area, at a moderate depth; and has either been worked out, drowned, or destroyed to such an extent, that probably little more than one-tenth remains to be won.* It is rather subject to "rock-faults," or "horse-backs," instances of which are given by Mr. Jukes;† one of which the author had an opportunity of examining at Baremoor colliery, where the whole mass of coal has been replaced by sandstone—the junction being formed of a series of interlacings of sandstone and coal.

* It is to be hoped that, as the value of the coal increases, the colliery proprietors may be induced to combine together to unwater the large tracts now flooded near Dudley; as it is only by such united action that this desirable end can be accomplished.

† *Supra cit.*, p. 45.

*Thinning of the Strata southwards.*—In the northern part of the coal-field, at Essington and Pelsall, the Main or thick coal of Dudley becomes split up into nine distinct seams, with a combined thickness of exactly 30 feet of coal; but separated by 420 feet of sandstones and shales, all of which are absent to the south of the "Great Bentley fault." This remarkable thinning out of the strata takes place in a distance of five miles from north to south, and is an additional instance of the vastly higher amount of persistency in the coal-seams than in the sedimentary strata with which they are associated.

*Dip of the Beds.*—North of the Great Bentley fault, the general dip is from east to west; and there is an extensive tract of about ten miles in length extending to Beaudesert, and three in breadth, over which the lower coal-seams lie nearly undisturbed, as those which are worked at Essington and Wyrley occupy a higher position. At Brereton there are several shafts sunk through conglomerate of the New Red Sandstone formation under which coal is extensively worked.

*Cannock Chase.*—Extensive mining operations have recently been commenced over the northern portion of Cannock Chase, which is

partly formed of New Red Conglomerate, and undoubtedly conceals an extensive coal-field. A pair of shafts have recently been sunk in the Huntington Valley to the "Deep coal," which was reached at 299 yards from the surface, all the shallower coals having been found in their usual positions.* One of the proprietors, Mr. M'Ghie, has favoured me with the following section of these pits, for insertion here :—

| *Name of Seam of any Thickness.* | | | *Depth from Surface.* | | |
|---|---|---|---|---|---|
| | Ft. | In. | Yds. | Ft. | In. |
| Coal | 2 | 4 | 27 | 1 | 3 |
| Cannock Brooch Coal | 3 | 11 | 36 | 0 | 2 |
| Five-feet Coal (8 in., parting included) | 5 | 11 | 75 | 1 | 9 |
| Coal | 3 | 6 | 88 | 2 | 3 |
| Old Park Coal | 5 | 0 | 124 | 0 | 3 |
| Coal | 4 | 2 | 178 | 0 | 5 |
| Coal | 2 | 1 | 205 | 1 | 0 |
| Coal | 2 | 3 | 208 | 1 | 2 |
| Yard Coal | 3 | 2 | 220 | 2 | 0 |
| Bass Coal | 4 | 2 | 243 | 0 | 3 |
| Cinder Coal | 3 | 10 | 265 | 1 | 3 |
| Shallow Coal | 9 | 3 | 271 | 1 | 8 |
| Coal | 2 | 2 | 280 | 2 | 3 |
| Deep Coal | 4 | 4 | 299 | 1 | 2 |

Coals under 2 ft. in thickness omitted.

* From a private communication from Mr. H. Beckett, F.G.S., dated 29th April, 1871. The new colliery belongs to the Cannock and Rugeley Colliery Company.

IGNEOUS ROCKS, CONTEMPORANEOUS AND ERUPTIVE.

*Basalt.*—In several localities over the southern portion of the coal-field, varieties of igneous rocks are found, frequently burrowing through and altering the Coal-measures, and sometimes resting upon them. The finest exhibition is the basaltic mass of Rowley Regis, or "Rowley rag," forming a hill about two miles in length, and 820 feet in height. This basalt assumes the columnar structure, affording examples of prisms as perfect as those from the Giant's Causeway in Ireland. Mr. Jukes considers that this rock has been poured out in the form of a lava-flow, during the coal-period; for the beds of coal dip under the basalt, and have been followed till found "blackened," or charred, and utterly worthless.*

At Pouk Hill, near Walsall, is another mass of columnar basalt, in which there are vertical, horizontal, bent, and radiating columns.†

* "South Staffordshire Coal-field," etc., p. 120.

† The researches of Mr. S. Allport on the microscopic structure of the various trap rocks of South Staffordshire, Worcestershire, and Coalville in Leicestershire, which penetrate the Coal-measures, tend to show that these have nearly the same composition; viz., triclinic felspar (probably Labradorite), augite, titano-ferrite, or magnetite, and olivine, as essentials, with occa-

*Greenstone* (*melaphyre*).—In the Lower Coal-measures, a sheet of greenstone spreads almost without interruption from the base of Rowley Regis, through the centre of the district, to Wolverhampton, Bilston, and Bentley. This would appear to have been a lava-flow of earlier date than the basalt, but ejected from the same vent, which we may suppose to be situated near the centre of the hill. There are also beds of volcanic ashes and gravel associated with the Upper Coal-measures at Hales Owen, probably nearly contemporaneous in their formation with the Rowley basalt.

*Ironstones*.—The ironstones occur in beds, associated with shale, and are the principal repositories of the fossils. The principal bands are,—

1. The Pins and Pennyearth ironstone-measures.
2. The Grains ironstone,
3. The Gubbin ironstone, } below the Thick Coal.
4. The New Mine ironstone.
5. The Pennystone do., with marine fossils, *Productus*, *Aviculo-pecten*, *Lingula*, etc., a *Palechinus*, and fish-teeth and bones.

sionally apatite and chlorite, calc spar and zeolites, the latter being of secondary formation; hence these rocks would fall under the name of "Melaphyres." See Mr. Allport's paper "On the Basaltic Rocks of the Midland Coal-fields," *Geol. Mag.*, vol. vii., p. 159 (1870).

6. Poor Robin, and White ironstone—only local.
7. Gubbin and Balls ironstone.
8. Blue Flats, Silver Threads, and Diamond ironstone.

*Fossils.*—Fish: *Gyracanthus formosus* (ichthyodorulites), *Rhizodus*, *Pleurodus*, *Ctenoptychius*, *Megalichthys Hibberti*, *Cochliodus*, *Pæcilodus*. Molluscs: *Productus*, *Conularia*, *Lingula*, *Myalina*, *Anthracosia acuta* (in coal), *Aviculo-pecten scalaris;* Annelides; and the usual Coal-measure plants.*

## *Resources.*

In order to arrive at an estimate of the resources of this coal-field, it is necessary to consider the northern and southern halves separately; as the former contains about three-fourths of the original quantity of coal, the latter only one-tenth.

| | | |
|---|---|---|
| 1. Area of coal-field . . . | 93 square miles. | |
| 2. Average thickness of workable coal above two feet . . . | 50 feet. | |
| 3. Total original quantity of coal (corrected for denudation) . . | 3,072 millions of tons. | |
| 4. Of this, the Northern part contained | 1,024 | ,, ,, |
| Deduct 1-4th, leaving for future use | 768 | ,, ,, |

* These fossils were determined by the late Mr. Salter, of the Museum of Practical Geology. They are similar to those of the "Penneystone" band of Coalbrook Dale.

| | | | |
|---|---|---|---|
| 5. The Southern part (south of the Bentley fault) contained . . | 2,048 | millions | of tons. |
| Deduct 9-10ths, leaving about . | 205 | ,, | ,, |
| 6. Total quantity remaining (768 + 205) | 973 | ,, | ,, |

### *Mr. Hartley's Estimates.*

Mr. Hartley's estimates, drawn up for the Coal-Commission, give larger returns than those above; one reason being that seams of coal down to one foot in thickness are included, whereas I have excluded those of a less thickness than two feet.* Mr. Hartley's returns include in one sum the available quantity of coal from the South Staffordshire and Shropshire coal-fields, giving a total of 1,906,119,768 tons.† Deducting 20 millions as the proportion due to the Shropshire coal-fields (Coalbrook Dale, Forest of Wyre, etc.) we have remaining (in round numbers) 1,880 millions of tons; which is nearly double the amount estimated by myself. Knowing that the southern limits of the coal-field are now definitely contracted, as proved by the sinkings at Wassel Grove and Manor Farm, I cannot think that

* Another source of discrepancy in the results probably arises from Mr. Hartley having included "to a small extent" areas outside the boundaries of the exposed coal-fields.—Report, Coal-Commission, vol. i., p. 28.

† *Ibid*, p. 29.

my estimate falls much below what will be found ultimately to be the resources of the actual and visible coal-field. That there are tracts of coal beyond its margin, under the newer formations, is unquestionable, and if these be included (as in the case of Mr. Hartley's estimate) the available quantity will be proportionately increased.*

In the year 1870, there were raised in this coal-field 9,356,500 tons of coal, from 326 collieries; the out-put having been doubled in the previous ten years, while the number of collieries was less by nearly one hundred! In the same year 588,562 tons of pig-iron were smelted in 114 furnaces. †

* Mr. W. Matthews has estimated that the duration of "the thick coal" on either side of Dudley, at the present rate of consumption, will be only about 40 years.—Proc. Dudley Geol. Soc., pp. 34—37.

† "Mineral Statistics," 1870.

# CHAPTER XI.

## NORTH STAFFORDSHIRE COAL-FIELD.

Fig. 14.—GENERAL SECTION ACROSS THE NORTH STAFFORDSHIRE COAL-FIELD.
(*Southern portion.*)

1. New Red Conglomerate.
2. Permian rocks.
3. Upper Coal-measures.
4. Middle ditto, with Coal.
5. Lower Coal-measures, with thin Coals.
6. Millstone Grit.

THE North Staffordshire coal-field, though of smaller area than that of South Staffordshire, has vastly greater resources. The strata are about four times as thick, with twice the thickness of workable coal; and instead of being bounded on each side by an enormous fault, which at one step places the coal at unusual depths, the Coal-measures of North Staffordshire dip under the Permian and Triassic rocks along a line of many miles at the south-western border of the coal-field, and under these formations coal may be obtained at a future day. More-

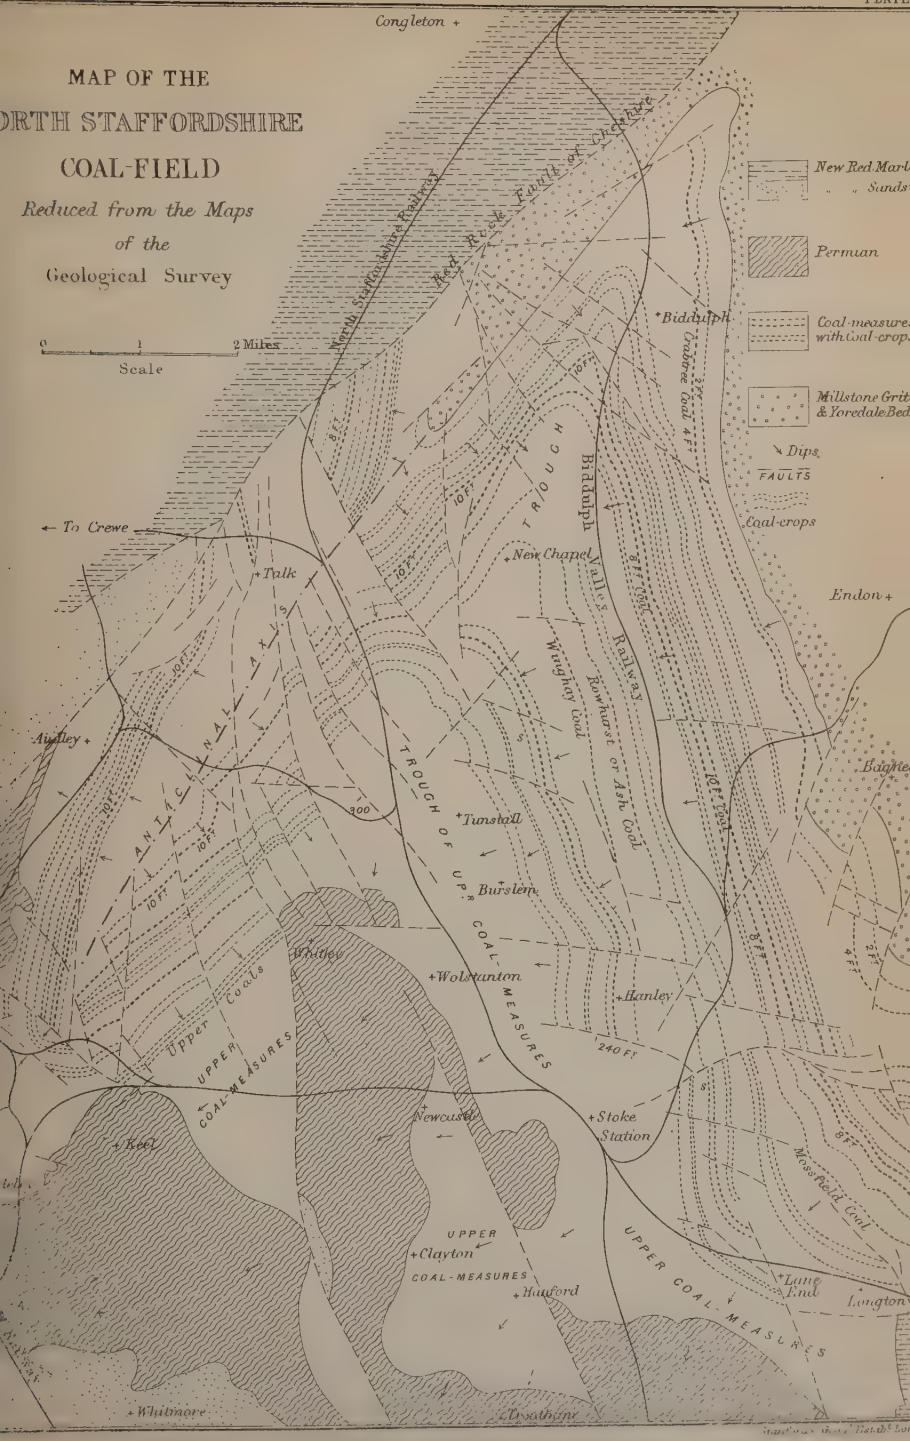


London: Edward Stanford, 6 & 7 Charing Cross.

over, there are none of those protrusions of igneous rocks which have produced so much injury to the coal-beds near Wolverhampton, Dudley, and Hales Owen. This coal-field has the shape of a triangle, with its apex to the north at the base of Congleton Edge; the eastern side is formed of Millstone Grit, and the western of New Red Sandstone or Permian strata. Along the south the Coal-measures are overlaid by Permian marls and sandstones, and these strata run far up into the heart of the coal-field by Newcastle, along the line of a great fault, which ranges north-north-west towards Talk-on-the-Hill.*

*Structure of the Coal-field.*—On referring to the map, it will be observed that, along the northern and central portions of the coal-field, the strata have been thrown into a double fold along synclinal and anticlinal axes, which appear to converge towards the apex of Congleton Edge; and in the opposite direction to diverge, till at the southern margins of the coal-field they are several miles apart. The synclinal axis is a prolongation of the Biddulph Trough, and ranges due south towards Newcastle-under-Lyne, in which direction it gradually dies out. The anticlinal (or saddle) stretches towards the south-

* Map of the Geological Survey, Sheets 72, N.W. and 73, N.E.

south-west from Mowcop, causing a rather sharp reversal of the dip through Silverdale, and disappearing amongst the Permian and Triassic strata between Madeley and Keel. Along either side of this axis the upper coal-seams rise and crop out for two or three miles in parallel lines; these ultimately disappear under higher strata in the valley west of Keel.

*Faults.*—With a few exceptional tracts, this coal-field is remarkably clear from faults; there are, however, several large lines of fracture, which have an important influence on the structure of the district. To the west of Mowcop, where the Millstone Grit emerges from beneath the Coal-measures, the coal-field is bounded by the prolongation of the "Red-rock fault" of Cheshire, which produces a down-throw to the north-west of the New Red Sandstone. This fault extends along the western base of Congleton Edge, and opposite the town of Congleton brings the Carboniferous Limestone and Red Marl nearly into contact. Another fault of importance passes in a north-westerly direction by Newcastle and east of Hanchurch, and throws down the beds on the east to the extent of about 350 yards; a third and parallel line passing by Hanford has a down-throw of 200 yards on the same side.

East of Longton, the coal-field is bounded by a large fault, which was visible at the entrance to the railway tunnel when in course of construction; on the east side of it the New Red Sandstone is introduced.

*Permian Beds.*—These beds consist of purple and brownish-red sandstones, sometimes calcareous and mottled, interstratified with thick beds of red marl. They occupy a position intermediate between the Coal-measures and the New Red Sandstone, and are unconformable to both. Their unconformity to the Coal-measures is proved by the fact, that they rest indiscriminately on different portions of the formation in different localities. Thus we find them north of Madeley resting on strata of the Coal-measures about the position of the "Red Shag" ironstone; while east of Newcastle, and near Stoke-on-Trent, they rest upon beds several hundred feet above this well-known band. The Permian beds attain their greatest development of 500 to 700 feet south of Newcastle-under-Lyne.

The unconformity of the New Red Sandstone to both the Permian and Carboniferous rocks is proved by even more striking cases of overlap than that above described: thus, while near Trentham we find several hundred feet of

Permian beds intervening between the New Red Conglomerate and the Coal-measures, south of Longton the former formation rests directly on the Coal-measures themselves.

*Spirorbis Limestone.*—The researches of Mr. Binney, F.R.S., and Mr. J. Ward have brought to light the existence at Fenton of a band of Limestone with *Spirorbis Carbonarius*. This band is characteristic of the Upper Coal-measures over a large portion of the centre of England, being found in these strata in South Lancashire, Shropshire, and Warwickshire.

*Succession of Strata, North Staffordshire Coal-field.**

| | | Greatest Thickness. Feet. |
|---|---|---|
| *Permian Rocks*— | Red and purple sandstones, marls, and cornstones (with plants), strata slightly unconformable to the Coal-measures . . . . | 600 |
| *Coal-measures*—1. 5,000 feet. | *Upper*—Brown sandstones, greenish conglomerate (like the volcanic ashes of S. Staffordshire) with thick beds of red and purple mottled clays; thin coals, and a bed of limestone at Fenton . . . | 1,000 |

* See Horizontal Sections of the Geological Survey, Sheets 42 and 55, with Explanations. This coal-field was surveyed by Mr. W. W. Smyth, and the Author, in 1856-7. Mr. Smyth has published a full description of the coal-seams and iron-stones, with their analysis, in "The Iron-ores of Great Britain," part iv. Mem. Geol. Survey.

| | Greatest Thickness. Feet. |
|---|---|
| 2. *Middle*—Sandstones, shales, with ironstone, and about 40 coal-seams | 4,000 |
| 3. *Lower*—Black shales and flags, with Wetley Moor thin coals, and the red ironstone of the Churnet Valley. (*Goniatites, Pecten.*) | 1,000 |
| *Millstone Grit*—Coarse grits, shales, and flags | 1,000 |
| *Yoredale Rocks*—Black shales, etc., with marine fossils | 3,100 |
| *Carboniferous Limestone* | 4,000 to 5,000 |

If we compare the above section with that of South Staffordshire, we cannot but be struck by the vast accession of sedimentary materials exhibited by this coal-field as compared with the latter—an accession which, it should be observed, takes place in a northerly direction.

*Succession of Coal-seams and Ironstones.**

| | Ft. | In. |
|---|---|---|
| *Black-band ironstone* (good quality) | 1 | 6 |
| Marl and bass (black shale) | 36 | 0 |
| *Red-shag ironstone* (variable) | 2 to 4 | 0 |
| *Coal* | 1 | 9 |
| Marl and bass | 71 | 6 |
| *Red Mine ironstone* (good) | 2 | 3 |
| *Coal* | 2 | 0 |
| Marl and bass | 35 | 9 |
| *Coal* | 1 | 8 |
| Binds, coal, and bass | 62 | 6 |

* A valuable communication on the qualities of the coal-seams in this coal-field will be found in the Trans. Geol. Soc., Manchester, by Mr. C. Bradbury, 1861-2.

| | Ft. | In. |
|---|---|---|
| *Coal* | 1 | 0 |
| Rock, binds, and bass | 77 | 0 |
| *Coal* | 0 | 9 |
| Marl, warrent, and rock | 78 | 0 |
| *Bassy Mine Ironstone* (good) | 4 | 0 |
| *Coal* | 2 | 0 |
| *Little Row Coal* | 2 | 2 |
| *Peacock Coal* | 5 | 8 |
| Metal and binds (sandy shale) | 40 | 6 |
| *Spencroft Coal* | 4 | 0 |
| Warrant and metal (shale) | 53 | 6 |
| *Grubbin Ironstone* in shale | 6 | 0 |
| Binds | 35 | 5 |
| *Great Row Coal* | 9 | 0 |
| Binds, rock, and bass | 78 | 9 |
| *Cannel Row Coal* | 6 | 6 |
| Various strata | 99 | 0 |
| *Wood Mine Coal* | 1 | 0 |
| *Pennystone Ironstone* | 2 | 0 |
| *Deep Mine ditto* | 0 | 10 |
| *Coal* | 3 | 0 |
| Strata | 69 | 0 |
| *Chalky Mine Ironstone* | 1 | 0 |
| ,, ,, *Coal* | 1 | 4 |
| *Brown Mine Ironstone* | 0 | 8 |
| *Coal* | 1 | 0 |
| Strata, with beds of ironstone | 59 | 4 |
| *Bungilow Coal* | 3 | 1 |
| Marl, binds, and rock | 108 | 5 |
| *Coal* | 1 | 0 |
| Strata | 97 | 3 |
| *Little Coal* | 2 | 2 |
| *Winghay*, or *Knowles Coal* | 5 | 0 |
| Metal and bass | 35 | 6 |
| *Winghay Ironstone* | 1 | 5 |
| Strata | 115 | 8 |

| | Ft. | In. |
|---|---|---|
| *Billy Mine Ironstone* | 0 | 6 |
| *Coal* | 1 | 6 |
| Bind and bass | 35 | 4 |
| *Coal* | 1 | 6 |
| Rock, metal, and bind | 34 | 6 |
| *Four-foot Coal* | 2 | 9 |
| Clay, bass, and metal | 50 | 0 |
| *Ash*, or *Rowhurst Coal* (house coal) | 11 | 6 |
| Marl, metal, etc. | 81 | 3 |
| *Burnwood Ironstone* | 1 | 0 |
| *Coal* | 5 | 3 |
| Strata | 54 | 0 |
| *Twist Coal and Cannel* | 3 | 6 |
| Strata | 59 | 0 |
| Coal | 1 | 6 |
| Dark metal | 97 | 0 |
| Strata | 292 | 7 |
| *Birchenwood Coal* (house coal) | 5 | 3 |
| Strata | 65 | 6 |
| *Mossfield*, or *Easling Coal* | 4 | 0 |
| Dark metal | 34 | 6 |
| *Coal* | 2 | 3 |
| Strata | 61 | 6 |
| *Coal* | 2 | 3 |
| Strata | 129 | 0 |
| *Yard Coal* | 3 | 6 |
| Binds | 31 | 0 |
| *Ragman Coal* | 4 | 6 |
| Strata | 79 | 0 |
| *Banburies* — *Rough 7-foot Coal* | 4 | 3 |
| *Banburies* — Strata | 124 | 8 |
| *Banburies* — *Stony 8-foot Coal* | 4 | 0 |
| Strata | 120 | 0 |
| *Ten-foot Coal* (strong coal) | 7 | 0 |
| Strata | 131 | 0 |
| *Bowling-alley Coal* | 4 | 6 |

| | Ft. | In. |
|---|---|---|
| Strata | 81 | 0 |
| *Holly Lane Coal* | 5 | 10 |
| Strata | 84 | 0 |
| *Sparrow Butts Coal* | 4 | 9 |
| Strata | 222 | 0 |
| *Flats Coal* | 3 | 0 |
| Strata | 108 | 0 |
| *Frog's Row Coal* | 4 | 6 |
| Strata | 30 | 0 |
| *Cockhead Coal* | 4 | 6 |
| Strata | 420 | 0 |
| *Bullhurst Coal* | 4 | 0 |
| Strata | 60 | 0 |
| *Winpenny Coal* | 3 | 0 |

*Lower Coal-measures.*—These beds, occupying a band of country on the dip of the Millstone Grit, contain two seams worked at Wetley Moor, of 4 feet and 3 feet respectively. Amongst these strata, which are often deeply stained with red iron-oxide, is the valuable band of iron-ore, worked in the Churnet Valley.

*Ironstones.*—Several of the coal-seams are roofed by beds of valuable ironstone, so that both can be worked together; of these the "red shag," the "red mine," the "bassy mine," and the "deep mine," and "chalky mine" ironstones are amongst the most worthy of note. The occurrence of thick beds of excellent ironstone, forming the roof of the coal-seams, is one of the

special features of this coal-field which greatly enhances its economic importance.

*Fossil Remains.*—Some of the beds in this coal-field are very rich in remains of fish which have been collected with much perseverance by Messrs. Garner and Molyneux, and more recently by Mr. J. Ward of Longton. Of these, a fine series was exhibited at the Meeting of the British Association at Manchester.* The following list, from the collection of Mr. Ward, has been kindly furnished by him, having had the benefit of revision by Sir P. Egerton, one of our highest authorities in ichthiology:—

Fish.—*Megalicthys Hibberti*, *Rhizodus* (three or four species), *Holoptychius*, *Rhizodus incurvus*, *Gyrolepis* (five or six species), *Palæoniscus*, *Cælacanthus* (two species), *Platysomus parvulus*, *Pl.* (new species), *Acanthodus* (new species).

Fish-Teeth.—*Diplodus gibbosus*, *D.* (*Pleuracanthus*) *minutus*, *Horpacodus* (*Ctenoptychius*) *apicalis*, *H. pectani*, *H. denticulatus*, *Helodus simplex*, *Acrodus*, *Diplopteris affinis*, *Cladodus*, *Petalodus*; also seven or eight of new, or indeterminate, species.

Ichthyodorulites.—Species of *Rhizodus Hibberti*, *Orthacanthus cylindricus* (18 inches long), *Gyracanthus formosus*, *G. tuberculatus*, *Pleuracanthus lævissimus*, *Ctenacanthus Hybodoides* (Egerton), *Leptacanthus*, *Ctenodus* (palate).

Molluscs.—From a bed called the "Bay-coal bass," lying rather high up amongst the Coal-series, the following have been obtained by Mr. Ward: *Nautilus*, *Goniatites*, *Aviculopecten*, *Melania*, *Productus*, *Lingula*, *Discina*, and a few other

* Trans. Brit. Assoc., p. 103 (1859).

forms. These are all marine genera. In the "Ten-foot" seam of Lord Granville's colliery at Hanley, there is a band of shale filled with the genera *Anthracoptera*, *Anthracomya*, and *Anthracosia*, together with *Goniatites Listeri*, *Aviculo-pecten papyraceus*, *Posidonia Gibsoni*, and *Spirorbis*. The association of the former-named genera with others of known marine habits has also been observed in Lancashire, and seems to show that all are alike marine, or at least estuarine. *Aviculo-pecten* and *Goniatites* have also been observed, by Mr. Binney, in the Lower Coal-measures of the Churnet Valley.

### *Resources.*

There are few coal-fields in the United Kingdom which, in proportion to their extent, are so richly stored with minerals, and which, owing to the arrangement of the strata towards the south and west, give promise of such high productiveness in the future. That the resources of this district—till within the last twenty years not properly recognised,—are now coming into full play, is evinced by the rapid increase in the production of coal, as well as iron. In the two years extending through 1857-59 the production nearly doubled itself; and since that time it has increased by about three-fourths, while the number of collieries has actually diminished; showing the larger scale upon which the mines are now being worked. I give the estimate of the actual resources, as determined, with the assistance of Mr. W. T.

Craig and the late Mr. W. Cope, by Mr. Elliot, the member of the Royal Coal-Commission appointed to report upon this district.

| | | |
|---|---|---|
| 1. | Area of coal-field (exclusive of the Cheadle and Goldsitch basins) . | 75 square miles. |
| 2. | Total thickness of measures with coal . . . . . | 5,000 feet. |
| 3. | Number of workable coal-seams about thirty, with a thickness of available coal amounting to . | 150 ,, |
| 4. | Available quantity of coal, to a depth of 4,000 feet * (in round numbers) . . . . | 3,720 millions of tons. |

In 1870 this coal-field yielded 3,873,512 tons of coal, raised by 108 collieries; of which 1,720,500 tons were used in the manufacture of iron. In the same year, 910,134 tons of iron-ore were raised; from which 303,378 tons of pig-iron were smelted in 37 blast furnaces. †

* Obtained after deducting the portion due to Cheadle and Goldsitch basins from the total amount down to 4,000 feet of depth. Like all the estimates of the Commissioners, it is considerably in excess of my own, owing to thin seams being included.

† "Mineral Statistics," 1870.

## CHAPTER XII.

### CHEADLE COAL-FIELD, STAFFORDSHIRE.

This small, and slightly productive, coal-field stretches from the valley of the Churnet, on the north-east, to the hills of New Red Sandstone, which stretch in a picturesque semicircle along its southern borders. Towards this range the strata dip (S.S.W.), and on the north side of the Churnet the high moorlands of the Millstone Grit rise from beneath the Coal-formation. In the centre of the coal-field, an outlier of New Red Conglomerate reposes unconformably on the Coal-measures, and forms the site of the pretty town of Cheadle.

The following is the succession of the coal-seams :—

1. Two-yard coal.
2. Half-yard coal.
3. Yard coal.
4. Littley coal.

5. Four-foot coal.
6. Woodhead 3-feet coal.

According to Mr. Elliot, this little coal-field contains about 104,524,000 tons of coal available for future use.*

*Goldsitch Trough.*—This is a narrow valley lying to the east of Wetley Rocks, composed of the red strata of the Lower Coal-measures, disposed in the form of a trough, with a north and south axis. It has a surface of area of 90 acres, and contains about 117,000 tons of coal.

### *Hæmatite Bed of Churnet Valley.*

The Lower Coal-measures of the Churnet Valley contain two thin coals, one of which has a roof of black shale with *Goniatites* and *Aviculopecten.*† Below these there occurs a valuable bed of *iron ore*, which is now being extensively worked along the valley from the outcrop, and at Froghall. This iron bed varies from 6 to 20 inches in thickness, is of a deep red colour, and contains about 35 to 40 per cent. of iron. It is imbedded in shale highly impregnated with

* Report, Coal-Commission, vol. i., p. 27.

† Mr. Binney, Trans. Geol. Soc. Manchester, vol. ii. p. 81, and Mem. Lit. and Philos. Soc., vol. xii.

hydrated peroxide of iron. The analysis of this ore by Dr. Angus Smith is as follows, from a good sample obtained by Mr. Binney:—

| | |
|---|---|
| Peroxide of Iron . . . . | 68·610 |
| Silica . . . . . | 5·490 |
| Carbonate of Lime . . . | 18·170 |
| Carbonate of Magnesia . . | 3·723 |
| Manganese, Alumina, and moisture | 4·007 |
| | 100·000 |

On that division of the coal-field extending eastward of the Permian rocks of Newcastle are situated the Potteries, a group of populous towns, the seat of that branch of industry originated by Wedgewood. From this all parts of the world are supplied with china-ware rivalling that of Dresden, with vases and various kinds of vessels modelled after Etruscan patterns, but adorned with paintings from natural models, executed with a perfection of colouring and outline to which the Etruscans never attained; here also are produced those tesselated pavements which adorn so many of our churches and public buildings. For the production of these works of art chalk-flints are brought from the south of England, decomposing granite from Cornwall, gypsum from Chellaston, siliceous chert from Derbyshire. The coarser kinds of earthenware,

as also tiles, bricks, and pipes, are made in large quantities from the clays of the Upper Coal-measures, while the coal is at hand for heating the baking ovens, and calcining the wares.

### CHESHIRE COAL-FIELD.

This is a small tract of Middle and Lower Coal-measures, lying to the south of the Mersey, above Stockport. It is bounded along the west by Triassic and Permian rocks, which are brought in along the line of the "Red-rock fault of Cheshire." Including the tract formed of Lower Coal-measures, the southern termination of the coal-field is opposite Macclesfield; while the central portion lies east of Poynton, where there are extensive collieries. There are several valuable seams of coal, including the "Mill mine," 4½ feet thick; the "Sheepwash mine," the "Great mine," the "Four-feet mine," the "Silver mine," the "New mine," and the "Redacre mine," which represents the Arley or Rowley mine.* Mr. Dickinson estimates the available quantity of coal at 200 millions of tons.†

* Geology of Stockport, &c. Mem. Geol. Survey, p. 29.

† Report, Coal-Commission, vol. i.

Fig. 15.—GENERAL SECTION ACROSS THE CARBONIFEROUS ROCKS OF LANCASHIRE.

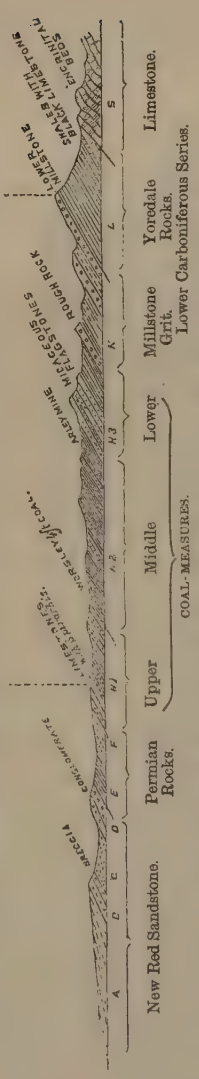


## CHAPTER XIII.

### SOUTH LANCASHIRE COAL-FIELD.

This great coal-bearing tract is very irregular in outline, and consequently difficult to describe. It may, however, be said to occupy a band of country lying east and west, sending offshoots at intervals into the Trias and Permian formations on the south, and into Lower Carboniferous strata which form its mountainous limits on the north. These offshoots are occasioned generally by enormous faults.

The extreme western boundary is a great fault, which, throwing down the New Red Sandstone on the west side,

PLATE VII.

# MAP OF THE SOUTH LANCASHIRE COAL-FIELD

To face page 184.

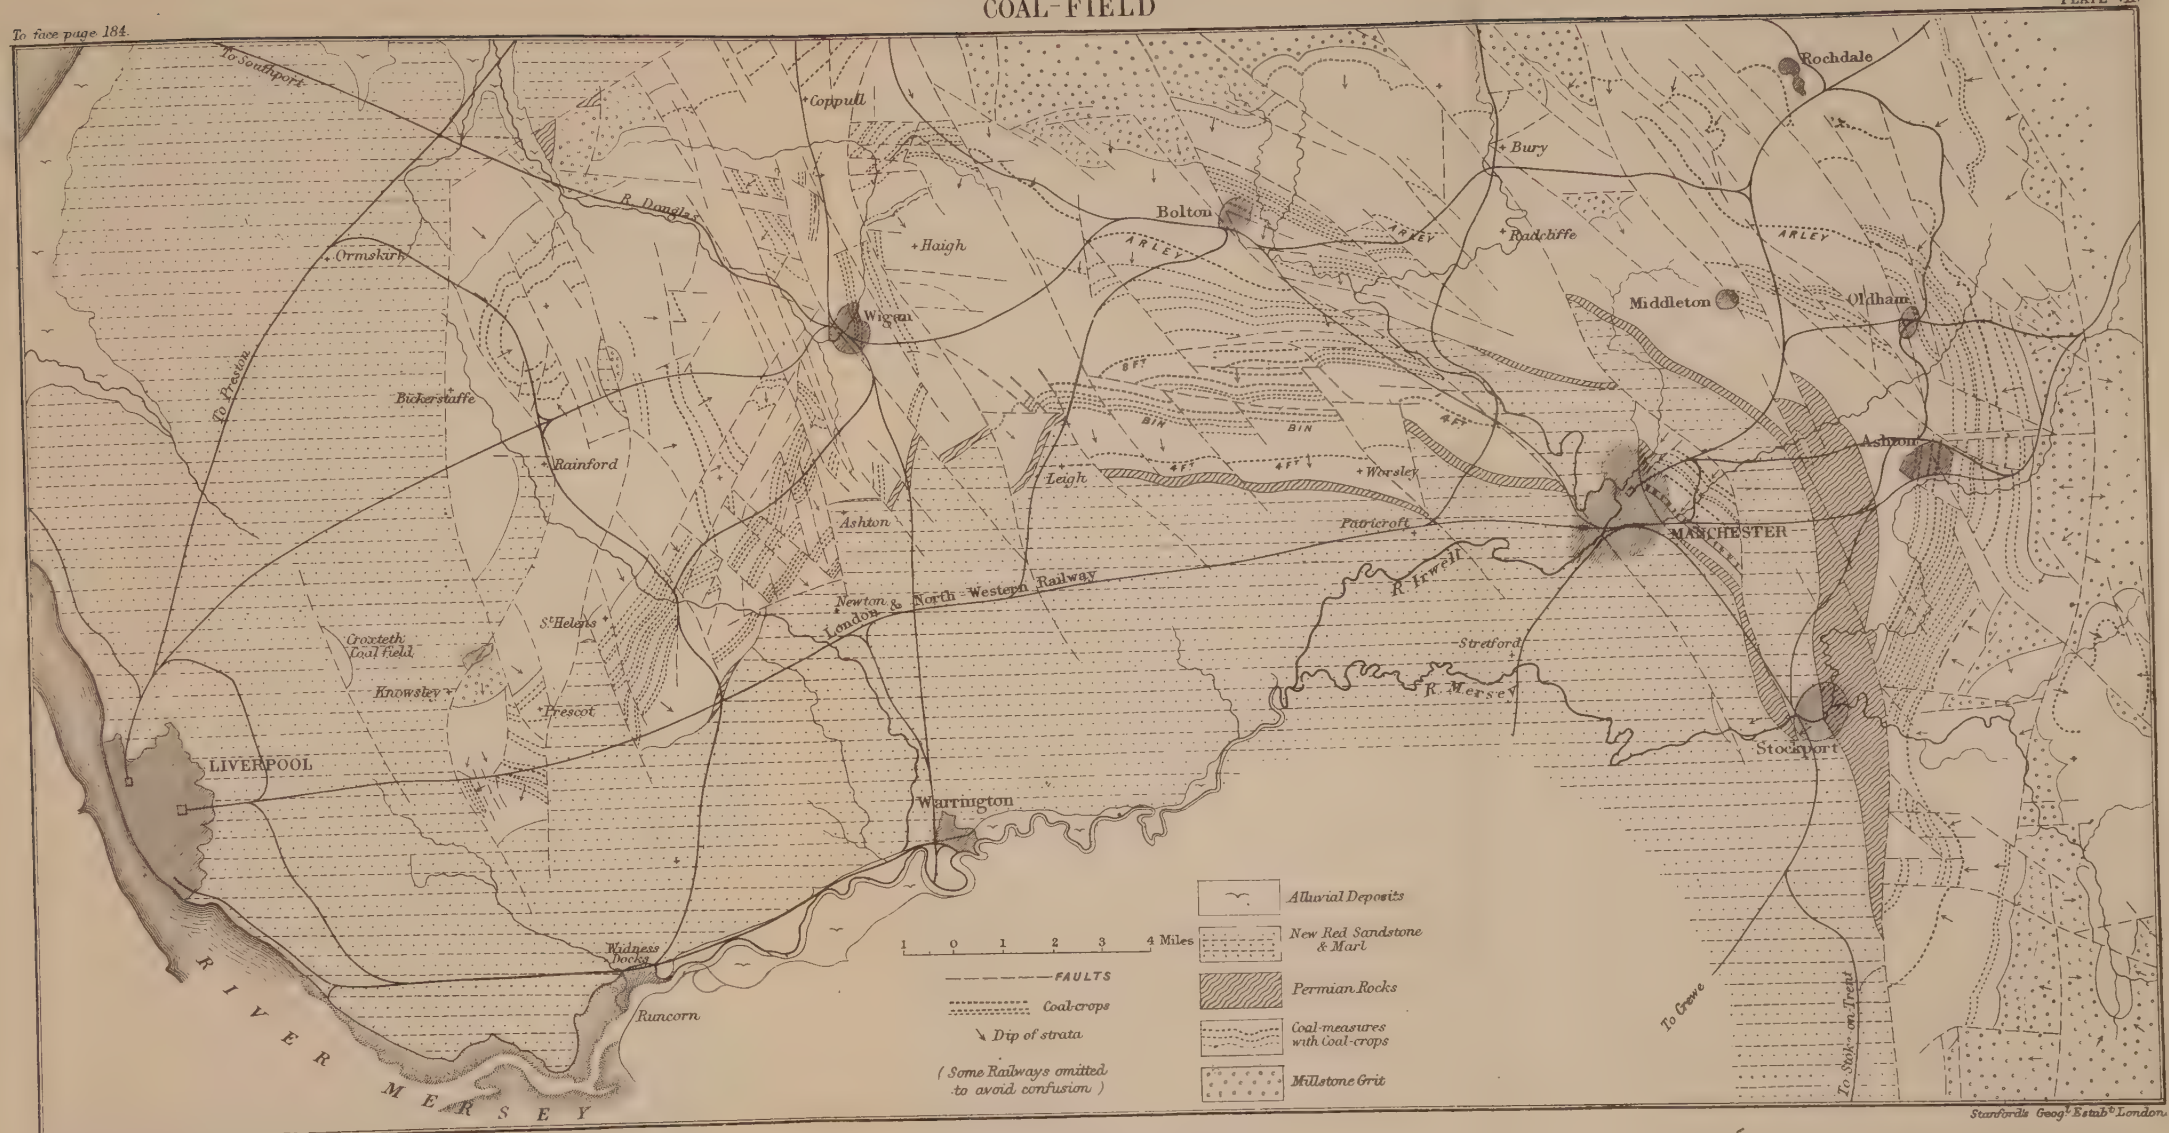


Stanfords Geogl Estabt London

London: Edward Stanford, 6 & 7 Charing Cross.

ranges through Eccleston, Lathom Park, Bickerstaffe, Knowsley Park, and Huyton. To the northward the high moorlands, formed of Millstone Grit and Lower Coal-measures, traversed by deep valleys with scarped flanks, reach elevations of 2,000 feet, and stretch with a semicircular outline from Chorley to Staleybridge, by Bolton, Bury, Rochdale, and Oldham. From this elevated tract the country gradually descends towards the Valley of the Mersey, and the Coal-measures dip under the Triassic and Permian strata, which form the low-lying districts, by Rainford, Newton, Ashton-in-Makerfield, Leigh, Astley, Eccles, Manchester, and Stockport, near which point the coal-field crosses the Mersey and enters Cheshire. The extreme length from Bickerstaffe to Staleybridge is 32 miles, and the average breadth 6 miles. Smaller isolated coal-fields occur at Croxteth Park, Bradford near Manchester, and Burnley.

To what distance the southerly dip of the Coal-measures continues beyond the valley of the Mersey is unknown; but from a consideration of the relations of the Carboniferous, to the newer, formations, I regard it as probable that the beds begin to rise towards the south, and possibly terminate along a concealed axis ranging

from Chester towards Congleton, in a direction from west to east.

*General Succession of Formations.*

| | | | Maximum Thickness. Feet. |
|---|---|---|---|
| Trias, 4,750 ft. | Keuper (A, B, of fig. 13). | 1. Red Marls, Cheshire | 3,000 |
| | | 2. Lower Keuper Sandstone (Waterstones) | 500 |
| | Bunter (C.D.) | 1. Upper Mottled Sandstone | 500 |
| | | 2. Conglomerate beds | 650 |
| | | 3. Lower Mottled Sandstone (often absent) | 100 |
| Permian Series, 355—650 feet. | 1. Upper (E.) | Red marls and limestones of Leigh, Patricroft, Manchester, with *Schizodus*, *Bakevellia*, *Turbo*, *Rissoa*, *Natica minima*, *Tragos* | 250 |
| | 2. Lower | Sandstone of Collyhurst, etc. | 100 to 400 or more. |

*Note.*—Several valuable memoirs on this coal-field have appeared by Mr. Binney, Trans. Geol. Soc., Manchester, vols. i. and ii., part 7; also by Mr. Bowman (*Ibid*). See also Mr. Dickinson's Vertical Section, in Report of the Inspectors of Mines for 1858. The Geological Survey of Lancashire, on a scale of six inches, and one inch to a mile, is now completed, and illustrated by explanatory memoirs and sheets of sections.

| | | | Maximum Thickness. Feet. |
|---|---|---|---|
| Coal-measures, 6,080 ft. to 8,000. | 1. Upper (H 1.) | Shales, sandstones, and limestones of Ardwick, with *Spirorbis*, *Cythere*, and fish of the genera *Ctenoptychius*, *Megalichthys*, *Palæoniscus*, etc.; and a bed of black-band ironstone, with *Anthracosia Phillipsii*. Below these beds are sandstones, shales, and thin coal-seams. | 1,680 to 2,000 |
| | 2. Middle (H 2.) | From the Worsley Four-feet Coal to the "Arley Mine," with *Anthracosia*, *Modiola*, fish, etc. | 3,000 to 4,000 |
| | 3. Lower, or Gannister Beds. (H 3.) | Flags, shales, and thin coals, with Gannister floors and roofs of shale, with *Spirorbis*, *Goniatites*, *Nautilus*, *Aviculo-pecten*, *Lingula*, *Anthracosia*, fish, *Cythere*, or *Cypris*. | 1,400 to 2,000 |
| Millstone Grit. | | From the "Rough Rock" to the lowest Millstone Grit (with thin coals) . . | 3,500 to 5,000 |
| Limestone Shale | | or Yoredale Rocks, with molluscs . . . . . | 2,000 to 4,000 |

The coal-series varies considerably in different parts of the districts, and there is a general thickening of the sedimentary materials, as sandstones and shales, towards the N.N.W. Thus

the *same* coal-seams are farther apart at St. Helens than at Prescot; and at Wigan than at St. Helens.

Several coals can be traced over the entire district under different names. The "Little Delf" of St. Helens is the "Arley Mine" at Wigan, the "Riley Mine" of Bolton, and the "Dogshaw Mine" of Bury. It is the lowest coal-bed of the middle coal-series, and one of great economic value. Its roof frequently contains fish remains, and some yards above it there occurs a very constant bed of ironstone filled with *Anthracosia* (*Unio*) *robusta*. Above this is the "Rushy Park" coal, which is very constant; but unfortunately the most valuable of all the coal-seams, the *Cannel Mine* of Wigan, thins away in every direction from Wigan as a centre. The Trencher Bone of Bolton is the Wigan 9-feet, and the Roger 9-feet of St. Helens.

*General Section of the Coal-series at St. Helens.*

(The numbers show the Coals which correspond to each other.)

| | Yds. | Ft. | In. |
|---|---|---|---|
| Strata of Upper Coal-measures without coal | 650 | 0 | 0 |
| *Lyons Delf Coal* (inferior quality) . . | 0 | 2 | 8 |
| Strata . . . . . | 16 | 2 | 0 |
| *London Delf Coal* (inferior quality) . . | 0 | 2 | 6 |
| Strata . . . . . | 28 | 2 | 2 |
| *Potato Delf* (inferior quality) . . . | 0 | 5 | 0 |

| | | Yds. | Ft. | In. |
|---|---|---|---|---|
| | Strata | 14 | 0 | 0 |
| | *Earthy Delf* (unworkable, full of partings) | 0 | 4 | 8 |
| | Strata | 94 | 1 | 0 |
| | *St. Helens Main Coal* | 0 | 9 | 0 |
| | Strata | 10 | 2 | 0 |
| | *Four-feet Coal* | 0 | 3 | 6 |
| | Strata | 18 | 2 | 0 |
| | *Cannel* | 0 | 1 | 6 |
| | Strata | 92 | 2 | 0 |
| | *Coal* | 0 | 3 | 10 |
| | Clay | 1 | 1 | 2 |
| | *Ravenhead Main Coal* | 0 | 7 | 0 |
| | Strata | 33 | 0 | 0 |
| | *Bastions Mine* | 0 | 4 | 3 |
| | Strata | 4 | 1 | 0 |
| | *Higher Roger Coal* (inferior, with partings) | 0 | 4 | 0 |
| | Strata | 61 | 2 | 0 |
| | *Flaggy Delf* | 0 | 4 | 0 |
| | Strata, with Lower Roger Coal | 152 | 2 | 0 |
| 2. | *Rushy Park Coal* | 0 | 4 | 6 |
| | Strata | 54 | 0 | 0 |
| 1. | *Arley Main* or *Little Delf* | 0 | 3 | 0 |

*General Section of the Coal-series at Wigan.*

| | | | | |
|---|---|---|---|---|
| 16. | *Four-foot Coal of Red Rock Bridge* | 0 | 4 | 0 |
| | Strata about | 200 | 0 | 0 |
| 15. | *Ince Yard Coal* | 0 | 3 | 0 |
| | Strata, with ironstone | 51 | 0 | 0 |
| 14. | *Ince* Four-feet *Coal* | 0 | 3 | 7 |
| | Strata | 27 | 0 | 0 |
| 13. | *Ince* Seven-feet (with parting) | 0 | 7 | 0 |
| | Strata | 23 | 1 | 0 |
| 12. | *Furnace Mine* (with parting) | 0 | 4 | 7 |
| | Strata | 84 | 0 | 10 |

| | | Yds. | Ft. | In. |
|---|---|---|---|---|
| 11. | *Pemberton* Five-feet Mine | 0 | 5 | 2 |
| | Strata (with a coal-seam 2 feet thick) | 25 | 1 | 0 |
| 10. | *Pemberton* Four-feet Mine | 0 | 4 | 6 |
| | Strata | 149 | 0 | 0 |
| 9. | *Wigan* Five-feet (inferior) | 0 | 4 | 6 |
| | Strata | 21 | 0 | 0 |
| 8. | *Wigan* Four-feet (inferior) | 0 | 4 | 0 |
| 7. | Strata, with a worthless coal called "Nine-feet Mine" | 125 | 0 | 0 |
| 6. | *Cannel* (best gas coal) from 1 to | 0 | 3 | 0 |
| | Strata (variable) | 1 | 1 | 0 |
| 5. | *King Coal* | 0 | 3 | 10 |
| | Strata | 79 | 0 | 0 |
| 4. | *Yard Coal* | 0 | 3 | 0 |
| | Strata | 50 | 0 | 0 |
| 3. | *Bone Coal* | 0 | 2 | 3 |
| | Strata | 3 | 0 | 0 |
| 2. | *Smith Coal* (Rushy Park) | 0 | 3 | 6 |
| | Strata | 60 | 0 | 0 |
| 1. | *Arley Mine* (the most valuable next to the *Cannel*) | 0 | 4 | 0 |

*General Section between Manchester and Bolton.*

(Curtailed from that of Mr. Dickinson.)

| | | | | |
|---|---|---|---|---|
| | Upper Coal-measures, with seventeen beds of Coal, too thin for working | 420 | 0 | 0 |
| 16. | *Worsley Four-feet Coal* (good) | 0 | 4 | 3 |
| | Strata, with twenty-five seams of coal under two feet | 294 | 0 | 0 |
| 15. | *Bin Coal* (inferior) | 0 | 3 | 6 |
| | Strata | 26 | 0 | 0 |
| | *Albert Mine* | 0 | 3 | 3 |
| | Strata | 14 | 0 | 0 |
| 14. | *Crumbourke Coal* | 0 | 4 | 0 |
| | Strata | 48 | 0 | 5 |
| 13. | *Rams Mine* (good) | 0 | 5 | 6 |

| | | Yds. | Ft. | In. |
|---|---|---|---|---|
| | Strata, with two coal-seams under 2 feet . | 84 | 2 | 7 |
| 10 | *White Coal* (good) . . . . . | 0 | 3 | 0 |
| | Strata (of variable thickness) . . . | 7 | 0 | 0 |
| | *Black Coal* . . . . . | 0 | 3 | 0 |
| | Strata . . . . . about | 15 | 0 | 0 |
| 9. | *Old Doe Coal* (three beds, with two partings) | 0 | 8 | 0 |
| | Strata . . . . . | 10 | 1 | 0 |
| 8. | *Five-quarters Coal* . . . . . | 0 | 3 | 6 |
| | Strata (with three coals under 2 feet) . | 88 | 2 | 0 |
| 7. | *Trencher Bone Coal* (3-6 to 6 feet) . . | 0 | 5 | 0 |
| | Strata . . . . . | 34 | 0 | 0 |
| 6. | *Cannel Mine* (cannel only 6 inches) . . | 0 | 4 | 6 |
| | Strata . . . . . | 19 | 1 | 0 |
| 5. | *Saplin Coal* (with parting) . . . . | 0 | 4 | 0 |
| | Strata . . . . . | 35 | 6 | 0 |
| | *Plodder Coal* (coal and shale, variable) . | 0 | 3 | 0 |
| | Strata . . . . . | 38 | 0 | 0 |
| 4. | *Yard Mine* . . . . . | 0 | 3 | 0 |
| | Strata (with four thin coals) . . . | 56 | 0 | 0 |
| 2. | *Three-quarters Mine* . . . . . | 0 | 2 | 0 |
| | Strata . . . . . | 68 | 2 | 0 |
| 1. | *Arley Mine* (with parting) . . . . | 3 | 6 to 4 | 6 |

The strata here enumerated are characterized by several bands with *Anthracosia*. From the *Cannel*, the late Mr. Peace collected splendid specimens of fish-remains, belonging to the genera *Megalichthys*, *Holoptychius* and *Ctenoptychius*.

*The Lower Coal-measures.*—These commence with the flagstones of Up-Holland, which lie a short distance below the Arley Mine, and extend downwards to the Millstone Grit through a series

of beds of shale, flagstone, and coal, about 1,800 feet in thickness. They are well laid open in the sections of the Wigan and Liverpool Railway. The coal-seams, three or four in number, are thin; and amongst the strata overlying the "Upper-foot," or "Bullion-coal," marine fossils of the genera *Goniatites*, *Nautilus*, *Aviculo-pecten*, etc. occur, as originally described by Mr. Binney.

*General Section near Oldham and Middleton.*
*Bardsley Colliery.**

| | Ft. | In. |
|---|---|---|
| "Bardsley Rock" (sandstone) | 45 | 6 |
| Shale | 31 | 7 |
| *Stubb's Mine* (coal) | 1 | 5 |
| Metal (shale) | 25 | 6 |
| *Fairbottom Mine* | 2 | 0 |
| Shale (with three seams of coal) | 76 | 6 |
| *Park Mine* (with parting of clay) | 3 | 6 |
| Shale | 29 | 0 |
| Foxhole Rock | 79 | 8 |
| *Foxhole Mine* | 2 | 4 |
| Soft shale | 32 | 6 |
| *Cannel* | 1 | 6 |
| Strata, principally shale, with a thin coal-seam | 187 | 8 |
| *Hathershaw Mine* | 2 | 2 |
| Shale, with two thin coal-seam | 51 | 0 |
| Sandstone, with water, called "Chamber rock" | 88 | 6 |

* "Geology of Oldham and Manchester," Mem. Geol. Survey, p. 24.

| | Ft. | In. |
|---|---|---|
| Shale and sandstone . . . . . | 38 | 3 |
| *Nield*, or *Upper Chamber Mine* . . . | 2 | 0 |
| Shale and sandstone . . . . . | 54 | 6 |
| *Lower Chamber Mine* (with two shale-partings) | 4 | 3 |

The most valuable seam in the district of Oldham, Middleton, and Ashton-under-Lyne, is the "Black-mine," which is generally upwards of four feet of solid coal of good quality; and in the Astley colliery at Dukinfield* lies at a depth of 687 yards from the surface. In the direction of the Mersey, where the coal-field passes into Cheshire, the seams are generally thin, or split up by partings of shale, which render them less profitable to work at great depths. From the neighbourhood of Oldham, where the measures begin to bend round towards the south, the dip is very persistent, and at a high angle in a westerly direction; the beds here coming under the influence of the Great Pennine axis of upheaval which ranges in a north and south direction along Saddleworth Valley.

*The Mountain Mines.*—The coal-seams known by this name in the northern and eastern portions of the district lie in the Lower Coal-Measures. Two of them are extensively mined, the "upper

* "Geology of Oldham and Manchester," Mem. Geol. Survey, p. 27.

mountain mine," from 14 to 16 inches in thickness; and the "Gannister coal, or lower mountain mine," lying from 60 to 75 yards underneath, varying in thickness from 18 to 30 inches, and in the direction of Burnley to even more than this. Its quality is good, and it is useful for coking: it has been worked at Heywood, Rochdale, the Lancashire moors west of Todmorden, and Portsmouth, Tunshill, Crompton, Broad Car, Staleybridge, and Newton; and at New Mills and Whaley in Cheshire.

*The Cheshire Coal-field.* — This small coal-tract has already been referred to. It is formed of the middle and lower coal-measures of Lancashire in their southern extension beyond the Mersey east of Stockport. It is bounded on the west by a large fault, the "red rock fault," along which the Permian and Triassic sandstones are introduced on the west. The coals are mined at Denton, Haughton, Hyde, Norbury, and Poynton, and there are several seams of good quality and thickness.*

*Marine Fossils in the Middle Coal-measures.*— In some large concretions shown in the banks of

* "Geology of Stockport, Macclesfield, &c.," Mem. Geol. Survey, by Messrs. E. Hull and A. H. Green, to which the reader is referred for full details. See *ante*, p. 183.

the River Tame, west of Dunkirk colliery, Ashton-under-Lyne, Mr. A. H. Green, of the Geological Survey, discovered a remarkable series of marine fossils, figured and described by the late Mr. Salter, in the "Geology of Oldham." * The position of this stratum appears to be above all the workable coals of Dukinfield. The following are the names of the species from this remarkable band: *Serpulites*, *Aviculo-pecten fibrilosus* (Salter), *A. papyraceus*, Sow. *Ctenodonta* (allied to *C. tumida*), *Nautilus præcox* (Salter), *Discites rotifer* (Salter), *Discites* (2 other species), *Goniatites*, *Orthoceras*, *Megalichthys Hibberti*. This is altogether a unique series from this division of the Lancashire Coal-formation in which fossil molluscs of genera allied to *Anthracosia* alone are found.

### *Faults of the Lancashire Coal-field.*

The Lancashire coal-field is traversed by dislocations which, although of great magnitude, produce scarcely any perceptible features at the surface—so complete have been the effects of denudation in levelling down inequalities arising from the displacement of the rocks. Over the

* Mem. Geol. Survey, pp. 32 and 64 (with plate of fossils, &c.)

southern portion of the district many of the faults slope or *hade* considerably; the general inclination being 25° from the vertical, but often more.*

The western boundary fault of the coal-field is a very large downthrow on the west near Ormskirk, where the Lower Keuper Sandstone and Lower Coal-measures are brought into contact.

The Great Up-Holland fault, which brings up the Lower Coal-measures so as to form an elevated band of country between the coal-fields of Rainford and Wigan, has a throw of 650 yards east of Lord Crawford's collieries.

The Coal-measures at Wigan are divided into belts, bounded by parallel faults which range N.N.W., having throws varying from 150 to 600 yards; of these the principal are the "Shevington fault," the "Cannel fault of Ince," and the "Great Haigh fault." Towards Manchester there is the "Great Pendleton or Irwell Valley fault," ranging along the valley of the Irwell (N.N.W.), bringing in the New Red Sandstone, with a downthrow on the N.N.E. of upwards of 1,000 yards. Lastly, the great fault along which the

* The fault at Red Rock Bridge N. of Wigan, and that which bounds the little coal-field near Rainhill, are remarkable instances of very flat slopes; the angle being about 25° from the horizontal in each case.

Manchester coal-field has been upheaved on the west against the New Red Sandstone has a throw of at least 400 yards. All these dislocations appear to have been produced after the period of the Trias or New Red Sandstone.

### *Fossils.*

Those who are interested in the palæontology of the Coal-formation would do well to consult the carefully-prepared lists of fossils, both of vegetable and animal origin, drawn up by the late Mr. Salter, and published in the "Geology of Bolton-le-Moors," * and in the "Geology of Oldham." † Having referred to these valuable details, I shall content myself with enumerating a few species of general occurrence, and most of which were first identified by Mr. Binney, ‡ to whose indefatigable exertions as a collector geologists of the North of England are so much indebted.

*Upper Coal-measures.*—Fish of the genera, *Ctenoptychius*, *Megalichthys*, *Diplopteris*, *Palæoniscus*, *Platysomus*, *Rhizodus*, *Diplodus*, and large bony rays resembling those from the limestone of

* Mem. Geol. Survey (1862).
† *Ibid* (1864).
‡ Trans. Geol. Soc., Manchester, vol. i.

Burdie House in Scotland. Crustacea: *Cythere* (Cypris) *inflata*. Annelids: *Spirorbis carbonarius*. Plants of the usual Coal-measure species.

*Middle Coal-measures.*—Fish: *Palæoniscus Egertoni*, *Megalichthys Hibberti*, *Rhizodus granulatus*, *Holoptychius*, *Diplopterus*, *Pleuracanthus gibbosus*, *Cælacanthus lepturus*. Molluscs: *Anthracomya modiolaris*, *A. dolabrata*, *Anthracosia ovalis*, *A. acuta*, *A. robusta*, *A. aquilina*, *Anthracoptera Browniana*, *Aviculo-pecten papyraceus* (Ashton-under-Lyne), *A. fibrilosus*, *Avicula Browniana*. Crustacea: *Beyrichia Binneyana*, *B. arcuata*, *Estheria striata*. Annelids: *Serpula*, *Spirorbis carbonarius*. Plants: *Asterophyllites*, *Calamites*, *Flabellaria*, *Halonia*, *Knorria*, *Lepidodendron*, *Lepidophyllum*, *Megaphyton*, *Nœggerathia*, *Poacites*, *Primularia*, *Sigillaria*, and *Ulodendron*. *Alethopteris*, *Cyclopteris*, *Neuropteris*, *Pecopteris*, *Sphenopteris;* and Fruits—*Lepidostrobus* and *Trigonocarpum*.

*Lower Coal-measures.*—Fish: *Megalichthys Hibberti*, *Cœlacanthus*, *Palæoniscus Monensis*, *P. Egertoni*, *Rhizodus granulatus*, *Pleuracanthus*. Molluscs: *Goniatites Listeri*, *G. reticulatus*, *G. Gibsoni* (Phill.), *G. paucilobus*, *Discites* (sp. inc.), *Orthoceras* (sp. inc.), *Posidonia Gibsoni*, *P. lævigata*, *Monotis lævis*, *Aviculo-pecten papyraceus*,

*Anthracosia ovalis*, *A. acuta*, *A. aquilina*, *Anthracoptera*, *Anthracomya*, *Lingula mytiloides*. Crustacea: *Estheria striata*, *Beyrichia arcuata*. Plants: *Alethopteris lonchiticus*, *Calamites Suckowii*, *C. undulatus*; *Daxodylon*, *Lepidodendron Sternbergii*, *L. obovatum*, *L. dilatatum*, *Sigillaria hexagona*, *S. mammilata*, *S. reniformis*, *Ulodendron majus*, *Pecopteris arborescens*, *Alethopteris lonchiticus*, *Neuropteris flexuosa*, *Nœgerathia*.

### *Resources of the Lancashire Coal-field.*

In my original estimate of the resources of this coal-field, I thought it proper to discard from consideration the thin seams of coal belonging to the Lower Coal-measures, and known as "mountain mines." I was not then fully aware of the importance of these coals in the direction of Burnley and Todmorden, where one or two of them are of sufficient thickness to be worked at great depths, and on this ground my estimate may have been too low. I also omitted all seams under two feet in thickness, which I hold to be a proper limit for depths over 500 or 600 yards; and the result arrived at for the whole district, including the Manchester and Burnley coal-fields,

was, that there remained an available supply of 3,990 millions of tons.* Mr. Dickinson, the Commissioner who has reported on the resources of this coal-field, gives a result considerably in excess of mine, due partly to his having included seams (according to the rule laid down for the guidance of the Commissioners) as thin as one foot in thickness, and also the mountain mines. While adopting Mr. Dickinson's estimate, I must, at the same time, express my dissent to the largeness of the return on the ground of including the thin seams, and leave the public to draw their own conclusions. The limit of depth adopted is 4,000 feet.

| | |
|---|---|
| 1. Area of the Coal-field, including the Manchester and Burnley districts . | 217 square miles. |
| 2. Total thickness of strata with coal . | 6,000 feet. |
| 3. Number of workable coals above 2 feet: St. Helens, 13; Wigan, 17; Manchester, 18; giving an average thickness of . . . . | 62 ,, |
| 4. Available quantity of coal to a depth of 4,000 feet . . . . . | 5,346,000,000 tons.† |

### THE MANCHESTER COAL-FIELD.

The north-eastern side and suburbs of Manchester stand upon a small coal-field, entirely

* "Coal-fields," 2nd edit., p. 135.

† Mr. Dickinson's estimate after deducting 200,000,000 tons due to the Cheshire coal-field.—Report, vol. i., pp. ix. and 18.

enclosed by New Red Sandstone, except at Collyhurst, where it is in contact with Permian strata. The shape of this coal-field is oblong, with its longest diameter lying N.N.W., and it is about four and a half miles in length; in its broadest part it is about a mile and a half across.

South of the fault which crosses it north of Miles Platting, and throws it on the north side the Permian beds of Collyhurst, the dip of the strata is south-west. The highest beds consist of red clays, shales, sandstones, and six beds of limestone, containing *Spirorbis* and fish; two thin coal-seams, and a bed of black-band ironstone containing in great abundance *Anthracosia Phillipsii*, and scales of fish. Mr. Binney considers this to be identical in position with the black-band ironstone of the Upper Coal-measures of Stoke, Staffordshire. These strata can be traced along the banks of the river Medlock, at Ardwick. The fossils which they contain have already been described (p. 197). Beyond question this is the finest representative series of Upper Coal-measures in the whole of Britain. Below these calcareous beds there occurs a thick series of shales, sandstones, etc., with seven beds of coal, the thickest of which is only four feet. One of

these coal-seams is probably on a parallel with the Worsley "four-feet" mine and its associated strata; but the thick coals, which lie about 1,000 feet below this coal at Pendleton, have not yet been reached in the Manchester coal-field, the intervening strata having apparently thickened out to a great, but unknown, extent.*

*Iron Ore.* — Mr. Binney, who has described this district with a fulness that leaves little to be required, has discovered in the bed of the Medlock a calcareous hæmatite, occurring in large blocks, which he considers identical with a band of the same mineral formerly worked at Patricroft Colliery.†

* From a calculation I made some years since, I came to the conclusion that no important coal-seams would be found at a less depth than 616 yards below the Bradford Four-foot coal. See "Geology of Oldham and Manchester," Mem. Geol. Survey, p. 36 (1864).

† "On the Geology of Manchester," Trans. Geol. Soc. Manchester, vol. i.

# CHAPTER XIV.

## THE BURNLEY COAL-BASIN.*

Lying several miles to the northward of the main coal-field, but united to it by a ridge of high land formed of Lower Coal-measures, stretching from Rochdale by Bacup in a northerly direction, is the small but rich coal-basin of Burnley. This coal-field sets in along the northern side of a low anticlinal arch, which lies along Rossendale Valley, and which, bringing to the surface the Millstone Grit, separates the Burnley basin from the northern margin of the

* A valuable paper on the Burnley Coal-basin was read before the Geological Section of the Bristol Association at Manchester, by Messrs. T. T. Wilkinson, F.R.A.S., and the late Mr. Whitaker, both of whom had devoted much attention to its structure, and the organic remains which its strata present. In my survey of this coal-field in 1867-8, I received much assistance from these gentlemen, and also from Sir J. Kay-Shuttleworth, of Gawthorpe Hall.

main coal-field. To the north, the basin is bounded by the Pendle Ridge, which ranges in a E.N.E. direction through Blackburn to Colne, along which the Millstone Grit and Yoredale beds rise and crop out towards the N.W. at high angles; which, however, rapidly lessen on receding from the base of the ridge. Along the east, the boundary of the basin is generally a fault, beyond which the moorlands of Yorkshire, formed of different members of the Millstone and Yoredale beds, rise to considerable elevations. One of these faults ranges along the Portsmouth Valley, along which the Millstone Grit is brought up on the south side for a long distance, forming a noble and precipitous escarpment. Another fault, parallel with this, ranges through Townley Park, and between them there is a trough, in which the highest coal-seams of the basin are found. In the centre of the basin is situated the town of Burnley itself, under which the strata are nearly horizontal.

A transverse section taken across the ridges of Padiham Heights and Pendle Hill, in the direction of Clitheroe, gives in unbroken succession a complete series of beds from the *Fulledge main coal*, or Arley mine, to the Carboniferous Limestone; and I believe it is the only spot

in Lancashire where none of the links of this chain of rocks are absent, or unbroken.

This section includes :—1. The outcrop of the "Arley mine," under Padiham reservoir; 2. The Lower Coal-measures, or Gannister beds, with thin coal-seams; 3. The "Rough Rock" and the beds of Millstone Grit; and 4. The Yoredale series, forming the western portions of the Pendle Range, passing downwards into massive encrinital limestone. The whole of this series reaches a thickness probably little short of 10,000 feet.

*Thickness of the Carboniferous-series.*—Nowhere in the north of England has the Carboniferous formation from the mountain Limestone upwards attained such noble proportions as in this part of North Lancashire. The upper portion of the coal-formation has been denuded and lost; but restoring it to its original dimensions as it occurs in South Lancashire, there appears to have been a total thickness of over 18,000 feet of Upper Carboniferous Rocks, as determined by several measurements across the Pendle Ridge, which are as follows :*—

* E. Hull "On the Thickness of the Carboniferous Rocks of the Pendle Range of Hills," &c., Journ. Geol. Soc. Lond., vol. xxiv., p. 319. In the measurement of some of these rocks I was assisted by my colleague, Mr. Tiddeman of the Geological Survey.

| | Feet. |
|---|---|
| Upper Coal-measures (restored, as at Ardwick) . | 2,013 |
| Middle ,, (partly restored) . . | 4,247 |
| Lower ,, (from the Arley mine to the first Millstone or "Rough Rock") . | 2,200 |
| Millstone Grit Series of Pendle . . . | 5,500 |
| Yoredale Series of Pendle . . . . | 4,675 |
| Total . . . . . | 18,635 |

## *Succession of Coal-seams at Burnley.*

| | Thickness. Feet. |
|---|---|
| Strata . . . . . | 30 |
| 1. *Doghole Coal* . . . . . | 6 |
| Strata . . . . . | 21 |
| 2. *Kershaw Coal* . . . . . | 3 |
| Strata . . . . . | 81 |
| 3. *Shell Coal* (Anthracosia) . . . | $2\frac{1}{2}$ |
| Strata . . . . . | 18 |
| 4. *Main Coal* . . . . . | 5 |
| Strata . . . . . | 33 |
| 5. *Maiden Coal* . . . . . | 3 |
| Strata, with 8 thin coal-seams (*Anthracosia rugosa*) . . . . | 162 |
| 6. *Lower Yard*, or *Five-feet Coal* (with shales) . . . . . | 5 |
| Strata . . . . . | 21 |
| 7. *Lower Bottom Coal*, or *Four-feet Coal* . | $3\frac{1}{2}$ |
| Strata . . . . . | 78 |
| 8. Impure Cannel . . . . . | $2\frac{1}{4}$ |
| Strata . . . . . | 21 |
| 9. *Thin Coal* and "fish-bed" . . | $2\frac{5}{4}$ |
| Strata . . . . . | 66 |
| 10. *Great Mine* { Coal, 28 inches / Shale, 12 ,, / Coal, 19 ,, } . | 4 (coal) |

| | | Thickness. Feet. |
|---|---|---|
| | Strata | 201 |
| 11. | *China Bed* | 2 |
| | Strata | 99 |
| 12. | *Dandy Bed* | 2 |
| | Strata | 141 |
| 13. | *Fulledge Main Coal*, or *Arley Mine* | 4 |
| | *Lower Coal-measures*, with Gannister coal, and two or three other seams, with roofs containing Goniatites, Aviculo-pecten, etc. | |
| | Millstone Grit series, with several thin coals. | |

From this section it will be seen that, near the centre of the basin, there are 1,017 feet of strata, down to the lowest thick coal, representing the *Arley mine* of Wigan, or the *Royley mine* of Oldham.

At Gawthorpe we find the following section :—

| | Ft. | In. |
|---|---|---|
| Various strata | 43 | 2 |
| *Coal* | 1 | 8 |
| Various strata | 57 | 1 |
| *Four-feet Coal* | 4 | 3 |
| Various strata, with hard sandstone 24 feet thick | 130 | 0 |
| *Yard Coal* | 3 | 0 |
| Bing (clay) | 9 | 7 |
| *Great*, or *Bing Mine* (with parting) | 6 | 0 |
| | 210 | 0 |

Below these are the Arley and Gannister coals.

The Lower Coal-measures which encircle the basin contain the "mountain mines," which are

here of more than usual importance. The Upper Mountain Mine is about two feet or more in thickness, and the Lower, or "Gannister Coal," has generally a thickness of four feet. The presence of such seams below the Arley mine adds largely to the resources of this basin.

*Ironstone.*—Clayband ironstone has been worked at no distant period from beds in the same position as those of Low Moor, in Yorkshire, justly celebrated for the excellence of the iron they produce.*

*Resources.*—The estimates of the resources of the Burnley basin are included with those of South Lancashire.†

The quantity of coal raised in Lancashire in 1869 was 13,995,500 tons from 392 collieries; an increase of 3,335,000 tons on the output of 1859. Lancashire contains the deepest coal-mines in the British Isles, that of Rose Bridge, near Wigan, 806 yards in depth, and that of Dukinfield, in Cheshire, on the confines of Lancashire, 717 yards; while there are several

* Mr. E. W. Binney, Mem. Lit. and Phil. Soc., Manchester, vol. xii.

† I am informed by Sir J. Kay-Shuttleworth that coal is known to have been worked at Burnley in the reign of Henry VIII.

shafts varying from 400 to 600 yards in depth in the western part of the coal-field. Several large firms also raise from their own pits nearly one million of tons of coal yearly. In this district mining operations are conducted on a large scale, and with the most perfect mechanical appliances.

The quantity of coal raised in 1870 was 13,810,600 tons from 385 collieries in Lancashire, and 929,150 tons from 29 collieries in Cheshire.*

* Mineral Statistics, p. 114, 1870.

## CHAPTER XV.

### PARK GATE COAL-FIELD, CHESHIRE.

A NARROW band of dark colour on our geological maps, stretching for upwards of a mile along the eastern shore of the estuary of the Dee, marks the position of the Park Gate Coal-field. From its position with reference to the coal-field on the opposite shore, we can scarcely doubt but that it is connected with the Flintshire coal-field under the sea; and the coals have actually been worked seawards for some distance. The general dip of the coal-strata is southwards and westwards; and inland they are separated from the New Red Sandstone by a large fault which enters the sea at the north side of Burton Point, where a very interesting section of this latter formation is exhibited in the cliffs. The following is a section of the coal-series, for which I am indebted to my friend Mr. P. Higson, jun., of Manchester:—

*Section of the Coal-series, Park Gate.*

| | Yds. | Ft. | In. |
|---|---|---|---|
| Strata | 23 | 0 | 5 |
| *Coal* | 0 | 2 | 0 |
| Strata | 3 | 0 | 7 |
| *Coal* (*Main-seam*) | 1 | 2 | 8 |
| Strata | 14 | 0 | 0 |
| *Coal* | 1 | 1 | 0 |

It has been suggested that these seams correspond with the "Brassy," "Main," and "Lower Four-foot" coals of Flintshire.

## CHAPTER XVI.

### INGLETON AND BURTON COAL-FIELD, NORTH LANCASHIRE.

This is a small coal-field, lying a short distance to the south of Kirkby Lonsdale, and to the E.N.E. of Lancaster.* Its relations to the surrounding rocks and its own structure are obscure, owing to the deposit of Drift clay and gravel by which it is overspread.

Along the north-east it is bounded by the "Great Craven Fault," which brings up the Lower Carboniferous Rocks; in the other directions it reposes on beds of Millstone Grit and Yoredale Rocks, and is partially overlaid by red sandstones and breccias, which are laid open in

* It has been described by Professor Phillips, F.R.S., in his "Geology of Yorkshire," and more recently by Mr. Tiddeman, of the Geological Survey, in a communication to Professor Ramsay, which is inserted in his Report "On the possibility of finding Coal under the newer Formations," etc.—Rep. Coal-Commission, vol. i., p. 127.

the Valley of the Lune, and referred by the Geological Surveyors to the Permian formation.* The beds of coal have hitherto only been worked on a small scale.

The following is a section of the Coal-series as given by Professor Phillips, from the notes of Mr. Hodgson, mining engineer:—

| | Ft. | In. |
|---|---|---|
| Measures | 82 | 0 |
| *Coal* | 1 | 0 |
| Measures | 31 | 0 |
| *Coal* | 1 | 0 |
| Measures | 4 | 0 |
| *Main*, or *Four-foot Coal* | 4 | 0 |
| Measures | 4 | 0 |
| *Coal* | 2 | 0 |
| Measures | 28 | 0 |
| *Crow Coal* | 1 | 8 |
| Measures | 54 | 0 |
| *Deep Coal* | 6 ft. to 9 | 0 |
| Measures | 3 | 0 |
| *Coal* | 2 | 0 |
| Measures | 80 | 0 |
| *Coal* | 2 | 0 |
| Potter's Clay | 4 | 0 |

* Geol. Survey Map, Sheet 98, S.E.

## CHAPTER XVII.

### CUMBERLAND COAL-FIELD.

The zone of Carboniferous rocks which wraps round the northern flanks of the Cumberland mountains is surmounted by the rich coal-field of Whitehaven, Workington, and Maryport. Between this last town on the north and St. Bees' Head on the south, it stretches along the coast of the Irish Sea, and extends inwards for a distance of five miles, in which direction the beds rise and crop out. From Maryport the coal-field extends eastward to Bolton. Its total length is about 20 miles, and greatest width, at Workington, about 5 miles.*

From the Memoir of Professor Sedgwick, who has recorded the distinctive features of this coal-field, I gather the following descending series.†

* Ruthven's Geological Map of the English Lakes.

† Trans. Geol. Soc. of London, vol. iv. Brit. Assoc. Report, vol. vi., p. 75 (1837). I have also been kindly assisted by Mr. Dickson, of Whitehaven, who has furnished several colliery sections and much general information.

*Succession of Strata.*

Permian strata.—1. Sandstone of St. Bees' Head, decomposing into grotesque and castellated forms.

2. Gypseous marls, surmounted by sandy marls and micaceous sandstone.

3. Conglomerate of magnesian limestone, etc., resting on an eroded surface of the Whitehaven sandstone.

Coal-measures 2,000 feet.

1. (?) Massive reddish sandstone of Whitehaven. Professor Sedgwick appears doubtful of the affinities of this rock—100 to 150 feet.*

2. *Middle*, most fully developed at Cleat Moor, containing 7 workable coal-seams.

3. *The Lower*, with 4 or 5 thin and inferior coal-seams.

1. Grits and limestone shales, with thin bands of coal at Hesket New Market. The limestone at Cleator and Wath, very rich in hæmatite iron-ore.

*Succession of the Coal-seams Whitehaven.*

| | | Thickness. Feet. |
|---|---|---|
| | Strata | 432 |
| 1. | *Yard Band* (about) | 3 |
| | Strata | 30 |
| 2. | *Coal* | $2\frac{1}{2}$ |
| | Strata, with a thin coal-seam | 78 |
| 3. | *Bannock Band* | 8 to 9 |
| | Strata | 60 |
| 4. | *Main Band* | 6 to 11 |
| | Strata | 240 |
| 5. | *Low Bottom Coal* | 4 |

* After a personal inspection of this sandstone, I feel no doubt of its belonging to the Coal-measures.

*Workington.*

| | | Thickness. Feet. |
|---|---|---|
| | Strata | 132 |
| 1. | *Fiery Band* | 2 |
| | Strata | 96 |
| 2. | *Brassy Band* | $2\frac{1}{4}$ |
| | Strata | 72 |
| 3. | *Cannel*, or *Metal Band* | 4 to 6 |
| | Strata | 60 |
| 4. | *Bannock Band* | $5\frac{1}{2}$ |
| | Strata | 30 |
| 5. | *Little Main Band* | 3 to 4 |
| | Strata | 180 |
| 6. | *Main Band* | 9 to 10 |
| | Strata | 210 |
| 7. | *Yard Coal* | 2 to 3 |
| | Strata | 102 |
| 8. | *Four-feet Coal* | 4 |
| | Strata | 150 |
| 9. | *Udale Band* | 3 to 4 |

At Maryport, beneath the Lower Red Sandstone, there occurs the "Ten-quarter coal," 7 feet thick, supposed to represent the "Bannock Band" of Workington, and the "Metal" and "Cannel bands," separated by 36 feet of strata, are considered to represent the "Main band."

The thick coals of Workington are thrown out south of that town by a large fault, upheaving the Lower Coal-measures, which occupy an extensive plateau, stretching from Harrington to the hills north of Moresby. Another great fault,

with a downthrow on the south-west, again brings in the productive measures of Whitehaven. Unfortunately, however, between this fault and the village of Parton, the beds dip to the east, so that all the coal-seams below high-water mark crop out under the sea, and the coal cannot be extracted on account of the quantity of sea-water which finds its way along the planes of bedding. In one of the collieries at Whitehaven, however, the coal has been followed 3,200 yards under the sea.*

From Workington to Flimby, a large unwrought coal-field is supposed to exist, and from Workington to Maryport the general dip of the strata is north-west, and the coals crop out inland, where they have been worked to some extent in very early times.

From Maryport to Bolton, by Crosby and Aspatria, the coal-seams are overlaid by the newer strata of Permian age, under which they probably extend for some undefined distance, which Professor Ramsay considers may reach as far eastward as Carlisle †—and northward, so as to join the little coal-field of Canobie, which, according to the report of Professor Geikie,

* As I am informed by Mr. W. W. Smyth, F.R.S.

† Report of Coal-Commission, vol. i., p. 140.

contains eight seams of coal, having an aggregate thickness of 42 feet.*

*Resources.*

The estimates of the quantity of available coal made by Mr. T. E. Forster largely exceed those made by myself, partly arising from seams of coal under two feet in thickness having been excluded from my estimate, as being too thin for working at great depths. Mr. Forster also includes the seams of coal extending for a distance of two miles out to sea, which adds one-third to the quantity under the land. I here substitute Mr. Forster's estimate for my own, after deducting eight millions of tons for the quantity under 18 inches in thickness :†—

| | | |
|---|---|---|
| 1. | Area of Middle Coal-measures . . | 25 square miles. |
| 2. | Average thickness of workable coal . | 35 feet. |
| 3. | Available quantity of Coal, after necessary deductions for loss, etc., on land, 315 millions of tons . . | 416 millions of tons. |
| 4. | Available quantity under the sea, 101 millions of tons . . . | |

In the year 1869 there were 26 collieries, from which were raised 1,410,808 tons of coal,

* Report of Coal-Commission, vol. i., p. 168.
† *Ibid*, 21.

of which 563,477 tons were shipped to ports of the United Kingdom, Dublin being the principal. In 1870 the quantity was slightly less, 1,408,235 tons.* The output has increased during the previous ten years, it having amounted to only 1,041,890 in 1859.†

* "Mineral Statistics," 1870. † *Ibid*, 1859.

## CHAPTER XVIII.

### WARWICKSHIRE COAL-FIELD.*

This is the nearest to the metropolis of all the coal-fields. It extends towards the south-south-east of Tamworth, in a constantly narrowing band, by Atherston and Nuneaton, to near Wyken — a distance of 15 miles. At the northern end the strata form a trough four miles in breadth, bounded on the west, north, and east by faults which bring in the New Red Sandstone. The Coal-measures dip under a large district occupied by Lower Permian rocks, extending under Coventry and Warwick. This tract, with an area of 90 square miles, is underlaid by coal at a depth probably not greater than 2,500 feet in any part, often much less. At the

* For details of this coal-field see Mr. Howell's Memoir "On the Geology of the Warwickshire Coal-field, &c.," and the Maps and Sections of the Geological Survey. The section of the coal-field is reduced from No. 5, Sheet 51, by Mr. Howell.

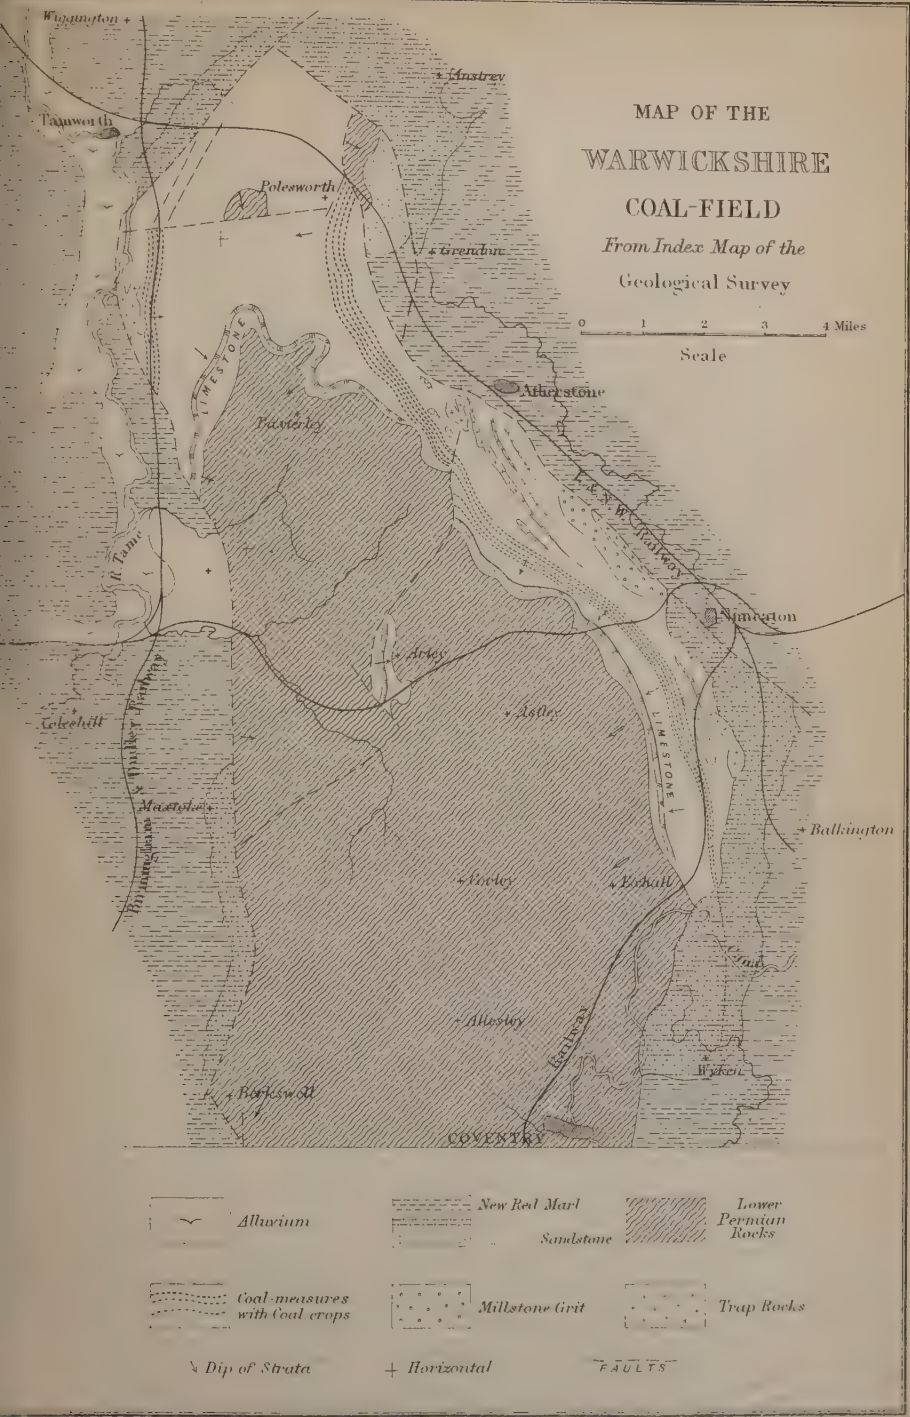


London: Edward Stanford, 6 & 7 Charing Cross.

south end of the coal-field the whole of the Coal-measures are overlapped by the New Red Sandstone, which passes across the edges of the beds and rests upon the Permian rocks. The prolongation of the coal-seams under the Trias has been proved as far south as Wyken Colliery, about two miles E.N.E. of Coventry. How much farther south they may extend it is impossible to say; but the probabilities are, that at some distance in the same direction the coal-seams will be found to terminate against the same bank of Silurian rocks, which forms the southern limit to the coal-seams of South Staffordshire. *

Fig. 16.—SECTION ACROSS THE CENTRE OF THE WARWICKSHIRE COAL-FIELD.
Length about 6 miles.
At Arley the outcrop of Limestone with *Spirorbis*.

* This is the view expressed by Professor Ramsay, F.R.S., in his Report on the "Probability of finding Coal under the Permian and N. R. Sandstone."—Rep. Coal-Commission, vol. i., p. 129.

*General Succession of the Formations.*

| | | Maxim. thickness. Ft. |
|---|---|---|
| Trias | 1. Red Marl | 600 |
| | 2. Lower Keuper Sandstone | 180 |
| | 3. Bunter Sandstone, only sparingly represented towards the north. | |
| Lower Permian Rocks. | 1. Brown and purple sandstones and marl, with calcareous breccia and conglomerate, with *Strophalosia? Labyrinthodon*, and plants | 2,000 |
| Coal-measures. | 1. Sandstones and shales, at the base of which a band of limestone, with *Spirorbis carbonarius* | 50 |
| | 2. Coal-measures, with five workable coals lying near the centre of the series | 1,400 |
| | 3. Lower Coal-measures unproductive of coal, and traversed by dykes of greenstone | 1,500 |
| Millstone Grit. | 1. Hard siliceous rock, with bands of shale, altered by intrusive greenstone (about) | 500 |

*Coal-seams.*—The five workable coals lie about 600 feet below the *Spirorbis* limestone. At the northern end of the district they are separated by about 120 feet of shales and sandstones, which all decrease in thickness southwards, while the coals remain nearly the same; and at Wyken, near Coventry, the five seams combine to

form one bed 26 feet in thickness. This is a change parallel to that which occurs in South Staffordshire in the case of the *thick coal*, which becomes split up northwards from Wolverhampton. Both cases exemplify in a remarkable degree the greater persistency of coal-beds over the sedimentary strata with which they are associated.

Under the Permian rocks there is about an equal quantity of coal at a depth of less than 2,500 feet, and about four times as much under 4,000 feet. Mr. Howell's sections show the probability that the coal-seams lie very regularly, and nearly horizontally under this formation. I cannot, therefore, but regard as of peculiar value this vast reservoir of fuel lying at the borders of the south-eastern counties, and actually closer than any other coal-bearing district to the metropolis of Britain.

The Lower Coal-measures are traversed by several intrusive sheets of greenstone, which *nearly* correspond with the planes of bedding. These dykes have been injected subsequently to the deposition of the Coal-measures, as they have baked and blanched the shales with which they are in contact. At the base of these strata we find the Millstone Grit changed into a kind

of quartzite through the influence of a mass of greenstone upon which it rests. Beyond this the whole of the strata are broken off by a great fault, which introduces the Trias to the eastward.

### *Resources.*

The investigation into the resources of the Warwickshire coal-field was entrusted to Mr. J. T. Woodhouse, F.G.S., one of the Commissioners, whose estimate I here substitute for my own, which it somewhat exceeds ; the difference, however, not being very material : *—

| | | |
|---|---|---|
| 1. | Area of Coal-field (between the boundary of the Permian formation and the outcrop of the "7-foot" coal) . | 30 square miles. |
| 2. | Thickness of Coal . . | from 26 to 30 feet. |
| 3. | Tonnage remaining unworked (Woodhouse) . . . . . | 809,730,113 tons. |
| 4. | Net available tonnage for future use (W.) | 455,473,182 ,, |

The quantity of coal raised in 1869 was 585,630 tons from 16 collieries. It seems strange that the quantity should be so small considering the advantageous position which the collieries occupy with reference to the London and central markets. In 1870 the quantity was 647,540 tons.

* The depth is under 3,000 feet for the whole quantity.—Report, Coal-Commission, vol. i., p. 31.

# MAP OF THE LEICESTERSHIRE COAL-FIELD

0 1 2 3 4 5 6 7

Scale 4 miles to 1 inch

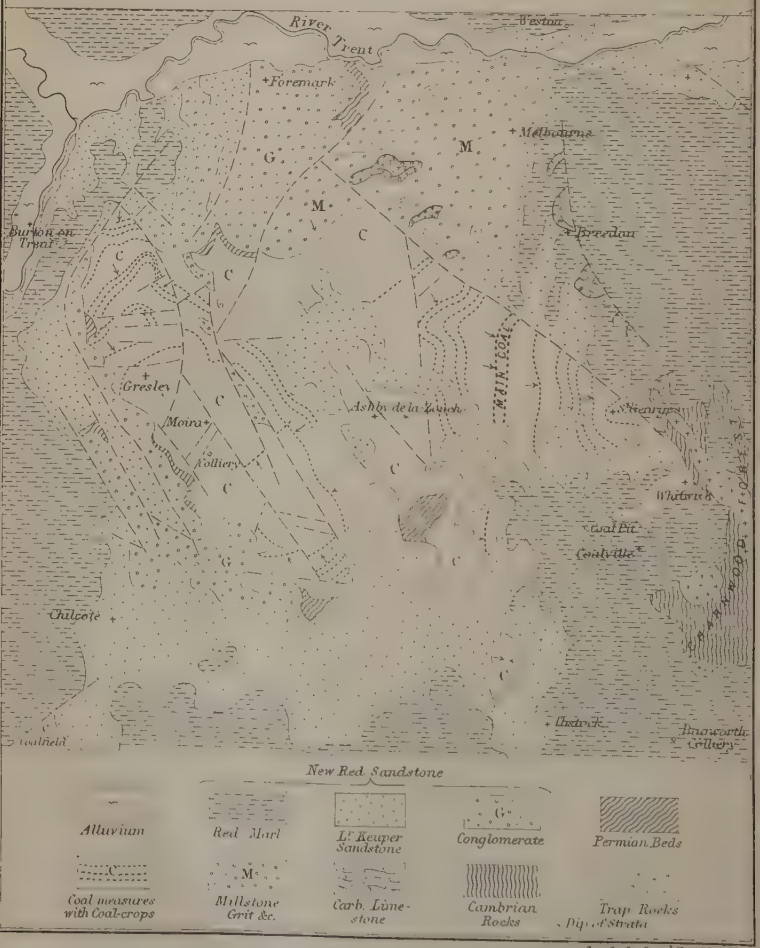


Stanford's Geog.l Estab.t London.

London: Edward Stanford, 6 & 7 Charing Cross.

## CHAPTER XIX.

### THE LEICESTERSHIRE COAL-FIELD.*

This small but valuable coal-field occupies an irregularly-shaped district south of the Valley of the Trent. Along its western, northern, and southern sides, it is bounded by strata of the age of the New Red Sandstone; and along the north-east, by the ancient slates and porphyries of Charnwood Forest, which form a miniature mountain range, rising in rugged knolls and serried ridges above the general level of the country. The Coal-measures underlie the New Red Sandstone to a large and unknown distance towards the south and west; and in the Coleorton district, several collieries are situated upon

* This coal-field has been very ably illustrated by Mr. Mammatt, in his "Geological Facts," and more recently by the works of the Geological Survey, consisting of Maps 63, N.W., 71, S.W.; Horizontal and Vertical Sections; and a Memoir "On the Geology of the Leicestershire Coal-field," by the Author, 1860. The Rev. W. H. Coleman has also largely contributed to the knowledge of a district of peculiar geological interest.




Fig. 17.—SECTION ACROSS THE LEICESTERSHIRE COAL-FIELD.
Distance about 12 miles.

the Keuper Red Marl, and pierce this formation downwards to the coal beneath; the deepest of these shafts is at Bagworth colliery.

The coal-field is physically divisible into three districts—that of Moira, on the west; Ashby-de-la-Zouch, in the centre; and Coleorton, on the east. The central district is formed of Lower Coal-measures, without workable coals, and is bounded on both sides by down-cast faults, which introduce the workable coal-beds of Moira and Coleorton. The coal-series of these latter districts cannot be identified with each other, though they are probably synchronous. "The main-coal" of Moira is from twelve to fourteen feet thick; that of Coleorton, from six to eight feet.

*General Succession of Formation—Leicestershire.*

| | | |
|---|---|---|
| Trias . . . | Keuper series . . . . | 700 feet. |
| | Bunter (sometimes absent) . . | 200 ,, |

Permian Rocks; Breccia, sparingly represented.

| | | |
|---|---|---|
| Carboniferous Series. | 1. Middle Coal-measures, with about 20 coal-seams, of which 10 are workable | 1,500 feet. |
| | 2. Lower Coal-measures, unproductive | 1,000 ,, |
| | 3. Millstone Grit | 50 ,, |
| | 4. Yoredale series and Carboniferous Limestone. | |

The following is a list of the coal-seams in both the Moira and Coleorton districts :—

*Coal-seams of the Leicestershire Coal-fields.*

| Moira District—(West.) | Ft. | In. | Coleorton District—(East.) | Ft. | In. |
|---|---|---|---|---|---|
| Ell Coal (*b*) | 3 | 8 | Stone smut (*c*) | 4 | 9 |
| Dicky Gobbler (*b*) | 3 | 6 | Swannington (*a*) | 3 | 7 |
| Block Coal (*a*) | 3 | 6 | Slate-coal (*b*) | 4 | 8 |
| Little or Four-feet (*a*) | 4 | 6 | Coal | 2 | 10 |
| Cannel (*b*) | 3 | 6 | Coal | 3 | 7 |
| Main { Over seam / Nether seam } | 12 | 0 | Main-coal (*a*) | 6 | 0 |
| | | | Upper Lount (*b*) | 3 | 9 |
| Toad (*c*) | 3 | 6 | Second Lount (*b*) | 3 | 0 |
| Little Woodfield (*c*) | 2 | 6 | Middle Lount | 4 | 6 |
| Woodfield (*b*) | 5 | 0 | Nether Lount | 4 | 6 |
| Stockings (*c*) | 9 | 0 | Heath End Coal and Cannel | 10 | 0 |
| Eureka (*a*) | 4 | 6 | Lower Coal-measures. | | |
| Strata below this unproved. | | | | | |

In the above list, I have omitted several of the least important coals. The letters *a*, *b*, *c*, indicate the degrees of quality.

I shall conclude this account of the Leicestershire coal-field by stating a few geological facts of interest.

*Igneous Rocks.*—At Whitwick, a remarkable sheet of dolerite or melaphyre, locally called

"whinstone," intervenes between the Coal-measures and the New Red Sandstone.* In one of the shafts of Whitwick colliery it is 60 feet thick, and has turned to cinders a seam of coal with which it comes in contact. It has evidently been poured out as a sheet of lava over the denuded surface of the Coal-measures at some period prior to that of the Trias,† and from a vent, probably situated at the junction of the Coal-measures with the old rocks of Charnwood Forest. The mutual relations of these rocks I have endeavoured to illustrate in the Geological Survey Memoir of this district.‡

* This rock has been microscopically examined by Mr. S. Allport, F.G.S., who finds it to be composed of triclinic felspar (probably Labradorite), angite, titano-ferrite, and olivine.—*Geol. Mag.*, vol. vii., p. 160 (1870). It is therefore an old dolerite or melaphyre, of later date than the Coal-measures on which it rests unconformably, and older than the New Red Sandstone (or at least than the Keuper), and therefore referable, in all probability, to some part of the Permian period.

† George Stephenson, the inventor of the locomotive engine, under whose direction the Whitwick shafts were sunk, had the sagacity to perceive that neither this layer of whinstone, nor yet the Triassic sandstones and marls which overlie it, interfered with the existence of coal beneath; so that, to all the doubts that were suggested during the progress of the works, he only returned the answer, "persevere." At length the shaft passed through the whinstone, and the Coal-measures were reached beneath, greatly to the astonishment of all beholders.

‡ Geology of the Leicestershire Coal-field, Fig. 8, p. 45.

*Rock-faults.*—In the same district, the main-coal has been extensively invaded by channels filled up with fine sand, which completely replace the coal over several hundred yards. One of these banks of sandstone, at Pegs-green colliery, was found to be 80 yards in width. It is composed of the same sandstone that forms the roof of the coal itself. In another of these, south of Whitwick colliery, a tunnel was driven to a distance of 110 yards without passing through it. These phenomena are similar to those already described in the case of the coal-field of the Forest of Dean.

*Salt-water.*—In the main-coal of Moira, especially in the Bath colliery, at a depth of 593 feet, salt-water, beautifully clear and of nearly the same composition as sea-water, trickles down from the fissures where the coal is being extracted. The brine is carried to Ashby-de-la-Zouch in tanks, and is considered highly beneficial in scorbutic and rheumatic affections.

### *Resources.*

The estimate of the resources of this coal-field, furnished by the Royal Coal-Commission, were entrusted to the able hands of Mr. J. T. Woodhouse, and are here substituted for those originally

made by myself, of which they are largely in excess. This is partly owing to seams of "12 inches and upwards" being included, as also the quantities of coal proved to exist by working under the Permian and, I presume, Triassic formations.*

| | |
|---|---|
| 1. Area of productive coal-field . . | 15 square miles. |
| 2. Number of workable coals, from 2 feet upwards in thickness, 10 with a total thickness of coal, from 40 to . . | 45 feet. |
| 3. Moira district, available quantity for future use, all necessary deductions having been made, 17,857,518 . | 339,574,841 tons. |
| 4. Coleorton district, do., 321,717,323. . | |

According to the returns prepared by Mr. T. Evans, there were raised from ten collieries 650,700 tons of coal in 1869, which is a decrease as compared with the quantity in 1859. In 1870, the quantity was 599,450 tons.

*Fossils.* — The plant remains are abundant, and have been figured in Mammatt's "Geological Facts." The only shells are of the genus *Anthracosia;* and of crustacea—*Cythere*, or *Cypris*, of an undescribed species, discovered by Mr. A. H. Green, of the Geological Survey.

* Report, Coal-Commission, vol. i., p. 30.

# MAP OF THE COAL FIELD OF YORKSHIRE, DERBYSHIRE AND NOTTS.

Scale 0 1 2 3 4 5 6 7 8 9 Miles

Bradford
Leeds
Wakefield
Huddersfield
Pontefract
Badsworth
Barnsley
Doncaster
Marr
Wadworth
Tickhill
Rotherham
Sheffield
Thorpe
Shireoaks Colliery
Worksop
Whitwell
Dronfield
Chesterfield
Warsop
Mansfield
Alfreton
Newstead Abbey
Wirksworth
Ashover
Belper
Heanor
NOTTINGHAM
DERBY
To Manchester
Penistone

R. Aire
R. Calder
R. Went
R. Don
R. Rother
R. Meden
R. Trent
RIVER DERWENT
RIVER IDLE

CANISTER COAL
CANISTER COALS
BARCELONA COAL
BLOCKING COAL
PARK GATE COAL
HAIGH HOUSE OR CAWTHORPE COAL
WOODMOOR COAL
FLOCKTON COAL
BARNSLEY COAL
WATH WOOD COAL
TOP SILKSTONE COAL
LOW MOOR COAL
SHAFTON COAL
ACKWORTH ROCK
SHAFTON ROCK
WATH WOOD ROCK
SILKSTONE ROCK
TOP HARD ROCK
ASTON COMMON ROCK
BLACK SHALE COAL
KILBURN COAL
TOP HARD COAL

Alluvium
New Red Sandstone & Marl
Magnesian Limestone Permian
Coal measures with Coal crops
Millstone Grit & Yoredale beds
Carbon.ous Limestone
Trap Rocks
FAULTS
Coal crops
Dip of Strata

London: Edward Stanford, 6 & 7 Charing Cross.

Stanford's Geog.l Estab.t London.

## CHAPTER XX.

### NOTTS, DERBYSHIRE, AND YORKSHIRE COAL-FIELD.

This great field, though forming parts of the shires of Derby, Nottingham, and York, is physically *one;* and in treating of its structure and resources we must ignore political and social landmarks. It is the largest coal-field in England; but about 150 square miles smaller in area than that of South Wales.

Its eastern margin is defined by the escarpment of the Magnesian Limestone, with its subordinate Lower Permian Sandstone, which, commencing near Nottingham, extends northwards beyond the limits of the coal-field itself. *

* On approaching the valley of the Trent the Permian beds become attenuated and debased; the Magnesian Limestone passes into a yellow calcareous sandstone, and the Lower Sandstone is but feebly represented. All this is in consequence of the near approach of the formation to its original margin, formed by the uprising of the Lower Carboniferous, and still older rocks of Charnwood Forest, above the sea level of the period.




Fig. 18.—GENERAL SECTION ACROSS THE DERBYSHIRE AND YORKSHIRE COAL-FIELD.
Drawn along the border of the two counties into Notts.
Distance 25 miles.

Upon reaching the crest of the escarpment, you find yourself on the edge of a table-land, resembling that of the Oolite Limestone of Gloucestershire, but less lofty. One point of this ridge is crowned by the turrets of Bolsover Castle. The southern boundary is New Red Sandstone, and the strata rise and crop out westward as far north as Bradford and Leeds, where they bend round to the east, and finally disappear under the Magnesian Limestone, which passes over and rests directly on the Millstone Grit. The greatest length of the coal-field from south to north is 66 miles; and its breadth varies from five to twenty miles. Though the general dip of the strata is eastward, there generally occurs along the centre of the field a gentle undulation (shown in the section, Fig. 18), which for a certain distance produces a

westerly dip; but the strata always roll over when approaching the base of the Permian Rocks. The coal-seams are only occasionally broken by faults.

To the westward, the Lower Carboniferous series rises into the lofty ranges of the Pennine chain, forming a natural division between the counties of Stafford and Lancaster on the west, and Nottingham and Yorkshire on the east, as well as their respective coal-fields. In fact, the upheaval of the Lower Carboniferous rocks, and the supervening denudation, has rent asunder a coal-field which originally embraced the whole of that portion of the North of England extending from the coast of Lancashire and Cheshire across to an undefined margin, which probably corresponded pretty nearly with the line of the river Trent, or even stretched farther eastward.

The loftiest escarpment of this central chain is Mickle Fell, formed of Millstone Grit, which reaches an elevation of 2,600 feet; the table-land of Kinder Scout, in the district of the High Peak, lying in the centre of the great arch of Millstone Grit, between the Cheshire and Derbyshire coal districts, is about 2,000 feet;* and in one place the

* See "Geology of Stockport," &c., Mem. Geol. Survey, p. 12.

Carboniferous Limestone of Derbyshire rises 2,533 feet above the sea.

*Historical Notices.*—This great coal-field and its bordering formations have been the subject of several important notices bearing on their mineral structure. As far back as 1684, Lister, whose name has been immortalized by Phillips in the well-known fossil *Goniatites Listeri*, proposed to the Royal Society the construction of geological maps, and illustrated his views by reference to the formations of Yorkshire, and the divisions he would have pourtrayed.* After him (1778) Whitehurst published some good sections of Derbyshire. † A few years later the Board of Agriculture, with the assistance chiefly of Mr. W. Smith, published a series of geological maps embracing parts of Yorkshire, Derbyshire, and Notts.; and shortly after the commencement of the present century, Mr. Farey produced his well-known report on the mineralogy of Derbyshire. With the publication of William Smith's Geological Map of England, in 1815, we enter upon the modern epoch of our science, which has been enriched, as far as regards the region we are now

* Philosophical Transactions, 1684.

† In the work entitled "Inquiry into the original state and formation of the Earth," by John Whitehurst.

investigating, by the labours of Phillips, * Sedgwick, † and Binney. ‡ The Government geological surveyors have also just completed the detailed survey of this coal-field.

### *Succession of Strata.*

*Southern-Extremity—Derbyshire and Notts.* The succession of strata along a line drawn from Kirkby Woodhouse through Alfreton Common and Wingfield Manor to Crich, may be very clearly ascertained, both from the details of the collieries, and the natural sections which present themselves. The following is the series in descending order :§—

| | | Feet |
|---|---|---|
| Permian Rocks. | 1. Marls and sandstone | 40 |
| | 2. Magnesian limestone (lower bed) | 60 |
| | 3. Marls and sandstone | 30 |
| Middle Coal-measures, 2,500 ft. | Strata to Top Hard Coal, about | 700 |
| | Waterloo Coal | 1,600 |
| | Ell | |
| | Lower Hard | |
| | Furnace | |
| | Black Shale or Clod | |
| | Kilburn | |
| | Shales, with ironstones | |

* "Geology of Yorkshire."

† Papers published in the Transactions of the Geological Society of London (1826).

‡ Papers published in the Lit. and Phil. Soc., Manchester, etc. Another work requiring notice is Mr. Denny's "Fossils of the Yorkshire Coal-field," Proc. Geol. Soc., York., vol. ii.

§ Horizontal Sections of the Geological Survey, Sheet 60.

| | | Feet. |
|---|---|---|
| Lower Coal-measures, or Gannister series. | Flagstones of Wingfield Manor. Shales and flaggy sandstones, with two coals underlaid by Gannister floors . . . . . | 1,000 |

The above are underlaid by Millstone Grit and Yoredale beds. These strata, in their extension southwards towards the valley of the Trent from Ambergate, gradually bend round towards the south-east, having a north-easterly dip, with which they pass beneath the New Red Sandstone, under which formation their presence has been recently proved by the opening of a colliery near the bank of the Trent opposite Clifton Hall.

In comparing the above series with that on the Lancashire and Cheshire side of the Pennine anticlinal, it is to be remarked, that while there is a general diminution in the total thickness of the strata, they can unquestionably be correlated from the Millstone Grit up into the lower beds of the middle Coal-measures. Thus, the uppermost Millstone Grit is identical with the "Rough Rock" of Lancashire. The coal-seams of the Lower Coal-measures, and the flagstones of Wingfield Manor, have their representatives in Lancashire; and the Blackshale coal is, with much reason, supposed to be the representative of the Royley, or Arley mine, of the same county.

For the purpose of affording a comparison of the formations towards the north and south of the field, I select sections from Nottinghamshire, and Barnsley in Yorkshire.

GENERAL SECTION OF STRATA.

| Nottinghamshire.*—(Shireoak Colliery.) | Ft. | Barnsley, Yorkshire.† | Ft. |
|---|---|---|---|
| Permian Rocks. { Upper Permian marls and sandstone ... ... | 56 | Magnesian Limestone ... | 75 |
| Permian Rocks. { Magnesian limestone ... ... | 102 | Lower Permian Sandstone ... | 54 |
| Permian Rocks. { Lower Permian sands and shale | 38 | | |
| Strata, with beds of hæmatite and ironstone ... ... | 42 | *Ackworth Rock* ... ... | 54 |
| *The Manor Coal* ... ... | 2 | Strata ... ... ... ... | 510 |
| Strata, with several thin coals | 706 | *Shafton Coal* ... ... ... | 5 |
| *Shireoak* or *Melton*, or *Baelbro' Hall Coal* ... ... ... | 4¼ | Strata, principally sandstone (Chevit rock) ... ... | 393 |
| Strata, with an inferior coal, 3/2 thick ... ... ... | 120 | *Muck Coal* ... ... ... | 3½ |
| *Furnace Coal* ... ... ... | 2¾ | Strata ... ... ... ... | 219 |
| Strata ... ... ... ... | 138 | *Woodmoor Coal* ... ... | 3 |
| *Hazles Coal* ... ... ... | 3 | Strata with half-yard coal ... | 45 |
| Strata ... ... ... ... | 238 | *Winter Coal* ... ... ... | 4 |
| *Top Hard Coal* (or *Barnsley Coal*) ... ... ... | 3¾ | Strata | |
| Strata ... | | *Beamshaw Coal* ... ... | 3 |
| *Dunshill Coal*, 2¾ ... ... | 155 | Strata, with Kent Coal 1 foot, and Mapple Coal 4½ feet (inferior quality) | |
| Strata ... | | Strata ... ... ... ... | 216 |
| *Waterloo Coal* ... ... | 2½ | *Barnsley Coal* ... ... | 9¼ |
| Strata, with 2 coals, two feet each in thickness ... ... | 345 | Strata ... ... ... ... | 198 |
| *Soft Coal* ... ... ... | 3½ | *Swallow Wood Coal* ... ... | 3 |
| Strata ... ... ... ... | 120 | Strata ... ... ... ... | 234 |
| *Lower Hard Coal* ... ... | 4 | *Joan Coal* ... ... ... | 2 |
| Strata | | Strata ... ... ... ... | 60 |
| *Piper Coal*, 2½ ... ... | 200 | *Flocton Top Coal* ... ... | 3¼ |
| Strata | | Strata ... ... ... | 120 |
| *Furnace Coal* ... ... ... | 4 | *Park Gate Coal* ... ... | 5 |
| | | Strata ... ... ... ... | 78 |
| | | *Thorncliffe thin Coal* ... ... | 2½ |

* Partly taken from section of Shireoak Colliery by Messrs. Lancaster and Wright, Journ. Geol. Soc., vol. xvi., p. 138.

† Rev. W. Thorpe, Section of Strata.—*Ibid.*

GENERAL SECTION OF STRATA—(*Continued.*)

| Nottinghamshire.—(Shirecak Colliery.) | Ft. | Barnsley, Yorkshire. | Ft. |
|---|---|---|---|
| Strata, with Yard Coal ... | 360 | Strata ... ... ... ... | 123 |
| *Clod* or *Black Shale Coal* ... | 5—6 | *Four-feet Coal* (variable) ... | 2½ |
| Strata ... .. ... ... | 480 | Strata ... ... ... ... | 108 |
| *Kilburn Coal* ... ... | 3½—5 | *Silkstone Coal* ... ... ... | 5 |
| Strata (with ironstone) ... | 350 | Strata ... ... ... ... | 195 |
| | | *Whinmoor* or *Lowmoor Coal* ... | 2½ |
| | | Strata ... (about)... | 150 |
| Flagstone overlying the Lower Coal-measures consisting of flagstones, shales, and the coals with Gannister floor, thickness rather uncertain (about) ... ... ... | 500 | Flagstone ... (about)... | 36 |
| | | Strata, principally shales ... | 495 |
| | | *Halifax Coal* (with *Pecten papyraceus* in the roof), and a floor of Gannister ... | 1¾ |
| | | Strata (shales and flags) ... | 81 |
| | | *Halifax soft Coal* ... ... | 1½ |
| | | Strata ... ... ... ... | 150 |
| Millstone Grit. | | Millstone Grit. | |

The following is a section of the strata at Cinderhill Colliery, showing their character near the southern extremity of the coal-field :*—

VERTICAL SECTION OF THE NOTTINGHAM AND DERBYSHIRE COAL-FIELD.

The first part (to the Top Hard Coal) from a pit at Cinderhill.

| No. | Description of Strata. | Thickness. | Depth. |
|---|---|---|---|
| | | Ft. In. | Ft. In. |
| 1 | Limestone (Magnesian) ... ... ... | 5 4 | — |
| 2 | Light-blue and brown stone in beds ... ... | 6 3 | 11 7 |
| 3 | Blue-stone ... ... ... ... ... | 8 5 | 20 0 |
| 4 | Dark-pink bind... ... ... ... ... | 3 8 | 23 8 |

* Mr. W. T. Aveline, "Geology of Nottingham," Mem. Geol. Survey, 1861.

## Vertical Section of the Nottingham and Derbyshire Coal-field, etc.—(*Continued.*)

| No. | Description of Strata. | Thickness. | | Depth. | |
|---|---|---|---|---|---|
| | | Ft. | In. | Ft. | In. |
| 5 | Dark-grey stone | 0 | 4 | 24 | 0 |
| 6 | Red stone with pebbles | 1 | 0 | 25 | 0 |
| 7 | Clunch (usually tough clay or shale) | 1 | 9 | 26 | 9 |
| 8 | Bind | 19 | 0 | 45 | 9 |
| 9 | Ironstone | 0 | 3 | 46 | 0 |
| 10 | Soft clunch | 5 | 0 | 51 | 0 |
| 11 | Black shale or bind | 2 | 7 | 53 | 7 |
| 12 | Clunch | 6 | 8 | 60 | 3 |
| 13 | Bind, with bands of ironstone | 40 | 4 | 100 | 7 |
| 14 | *Chillery coal* | 0 | 7 | 101 | 2½ |
| 15 | Light and dark clunch | 6 | 0 | 107 | 2½ |
| 16 | Bind | 20 | 9 | 127 | 11½ |
| 17 | Ironstone | 0 | 2 | 128 | 2 |
| 18 | Bind | 14 | 7 | 142 | 9 |
| 19 | Soft coal | 1 | 2 | 143 | 10½ |
| 20 | Shale bind and clunch | 20 | 2 | 164 | 0½ |
| 21 | *Soft coal* | 2 | 4 | 166 | 5 |
| 22 | Clunch and bind, with bat and shale | 18 | 10 | 185 | 3 |
| 23 | Soft coal | 1 | 0 | 186 | 3 |
| 24 | Clunch and bind | 1 | 0 | 187 | 3 |
| 25 | *Soft coal* | 1 | 8 | 188 | 10½ |
| 26 | Clunch and stone | 9 | 5 | 198 | 3½ |
| 27 | Bind, clunch, stone, and bat, with a little coal and ironstone | 81 | 8 | 280 | 0 |
| 28 | *Coal* | 3 | 6 | 283 | 6½ |
| 29 | Dark clunch, with bat and ironstone | 20 | 8 | 304 | 2½ |
| 30 | Coal | 0 | 7 | 304 | 9½ |
| 31 | Shaly bind | 10 | 1 | 314 | 10½ |
| 32 | *Soft coal* | 2 | 4 | 317 | 2½ |
| 33 | Shale and bind | 36 | 2 | 353 | 4½ |
| 34 | *Soft coal* | 3 | 4 | 356 | 8½ |
| 35 | Dark clunch, with impressions | 3 | 11 | 360 | 7½ |
| 36 | *Soft coal* | 1 | 3 | 361 | 10½ |
| 37 | Clunch and bind | 45 | 3 | 407 | 1½ |
| 38 | *Coal* | 1 | 5 | 408 | 6½ |
| 39 | Black shale and bind | 29 | 7 | 438 | 1½ |
| 40 | *Soft coal* | 2 | 5 | 440 | 6½ |
| 41 | Shale clunch, etc. | 68 | 7 | 509 | 1½ |
| 42 | *Coal* | 3 | 9 | 512 | 10½ |
| 43 | Shale and bind and a few small beds of ironstone | 82 | 3 | 595 | 1½ |
| 44 | *Coal* (hard) | 2 | 2½ | 597 | 4 |
| 45 | Clunch, bind, and shale | 50 | 0 | 647 | 4 |
| 46 | *Main*, or *Top Hard coal* (with clay partings) | 8 | 2 | 655 | 6 |

The depths and thicknesses of the seams below the Top Hard coal in the same district as given by Mr. Aveline are as follows:—

| | Thickness. | | Depth below Top, Hard. | |
|---|---|---|---|---|
| Top Hard, or Rifler Coal. | | | | |
| | Ft. | In. | Ft. | In. |
| Bind with ironstone ... ... ... ... | 25 | 2 | — | |
| *Coal* ... .. ... .. ... ... | 0 | 10 | 424 | 5 |
| Clunch and bind .. ... ... ... | 11 | 0 | — | |
| *Coal* .. ... ... ... ... ... | 0 | 10 | 436 | 3 |
| Bat, clunch, and bind ... ... ... | 9 | 9 | — | |
| *Coal* (probably the Ell coal)... ... ... | 1 | 0 | 447 | 0 |
| Bind and rock ... ... ... ... | 54 | 0 | — | |
| *Main* or *Deep Soft coal* ... ... ... | 3 | 0 | 504 | 0 |
| Bat ... ... ... ... ... ... | 1 | 0 | — | |
| Dark clunch and fire-clay ... ... ... | 12 | 6 | — | |
| Bind and rock ... .. ... ... | 6 | 10 | — | |
| *The Deep Hard coal* ... ... ... ... | 3 | 6 | 527 | 10 |

The following section gives the chief coals below the Deep Hard coal:—

| | Ft. | In. | Ft. | In. |
|---|---|---|---|---|
| Clunch, bind, etc. .. ... ... ... | 66 | 0 | — | |
| *Piper coal* ... ... ... ... ... | 5 | 0 | 71 | 0 |
| Bind, clunch, and other strata ... ... | 138 | 0 | — | |
| *Furnace Coal* ... ... ... ... | 4 | 0 | 213 | 0 |
| Clunch, bind, etc. ... ... .. ... | 108 | 0 | — | |
| *Yard coal* ... ... ... ... ... | 3 | 0 | 324 | 0 |
| Clunch, bind, etc. ... ... ... ... | 30 | 0 | — | |
| *Black Shale coal* ... ... ... ... | 5 | 4 | 359 | 4 |
| Clunch, bind, etc. ... ... .. ... | 459 | 0 | — | |
| *Kilburn coal* ... ... ... ... ... | 3 | 6 | 811 | 10 |
| Depth of Kilburn coal below Top Hard coal | — | | 1,339 | 8 |

In Derbyshire the principal coals are the "Top hard" and "Lower hard" seams, producing the valuable splint-coal, the "Upper soft" and

"Lower soft" coals; and in Yorkshire the most remarkable are the "Silkstone" and "Barnsley thick coals." The former is undoubtedly identical with the "Arley mine" of Lancashire; and thus this fine bed of coal, which seldom exceeds five feet in thickness, has originally spread over a tract embracing not less than 10,000 square miles!

The Upper and Lower hard coals, and the Silkstone seam, produce that remarkably deep glossy coal with long fracture, known as "splint." Different seams have different qualities, and are suited either for housefire, steam, or gas purposes.

In the Lower Coal-measures, or Gannister beds, described originally by Professor Phillips,* one or more of the coals, with their roofs of black shale filled with *Aviculo-pecten papyraceus*, *Goniatites*, *Posidonomya*, etc., can be identified with those which range over North Lancashire: all of which facts go to prove the original continuity of these great coal-fields.†

The following section, including a portion of the Middle, and the whole of the Lower Coal-

* Article "Geology," in *Encyclopædia Metropolitana*.

† See Mr. Binney, Trans. Geol. Soc. Manchester, vol. ii., part 7.

measures from the neighbourhood of Dewsbury and Halifax, will give a general view of the series as it occurs in the north-western portion of the coal-field :*—

*Coal-series near Dewsbury and Halifax.*

MIDDLE COAL-MEASURES.

| | Ft. | In. | | Ft. | In. |
|---|---|---|---|---|---|
| *Haigh Moor Coal* | 2 | 11 | to | 4 | 0 |
| Measures, with Thornhill and Dewsbury Rocks | | | | 340 | 0 |
| *Joan*, or *Parson's Coal* | 1 | 3 | ,, | 2 | 3 |
| Measures | | | | 58 | 0 |
| *Flockton Thick Coal*, with partings (variable) | | | | 9 | 0 |
| Measures | | | | 42 | 0 |
| *Flockton Thin Coal* | 1 | 5 | ,, | 3 | 0 |
| Measures, with *Old Hards*, or *Dawgreen Coal* | | | | 100 | 0 |
| *Coal* | | | | 1 | 1 |
| Measures | | | | 68 | 0 |
| *Green Lane*, or *Middleton Little Coal* | 0 | 6 | ,, | 3 | 6 |
| Measures | | | | 6 | 4 |
| *New Hards*, or *Middleton Main Coal* | 2 | 0 | ,, | 4 | 6 |
| Measures | | | | 60 | 0 |
| *Wheatley Lime Coal* | 1 | 0 | ,, | 3 | 0 |
| Measures | | | | 94 | 0 |
| *Blocking*, or *Toftshaw Coal* | 1 | 3 | ,, | 2 | 4 |

* Curtailed from "The Geology of Dewsbury," Expl. of Sheet 88, N.E. Mem. Geol. Survey, by Messrs. Green, Dakyns, Wood, and Russell.

LOWER COAL-MEASURES, OR GANNISTER BEDS.

| | Ft. | In. | | Ft. | In. |
|---|---|---|---|---|---|
| Measures | | | | 89 | 0 |
| *Lonsey Coal*, of Whitley and Hopton | 0 | 5 | to | 2 | 8 |
| Measures | | | | 78 | 0 |
| Strata, with *Whinmoor Coal* | | | | 38 | 0 |
| Sandstone, with "Oakenshaw Quarry Stone" | | | | 170 | 0 |
| *Yards*, or *Crow Coal* | 0 | 2 | ,, | 2 | 0 |
| Measures, with *Ironstone* (worked at Low Moor) | | | | 36 | 0 |
| *Low Moor Black Bed Coal* | 1 | 4 | ,, | 3 | 0 |
| Measures | | | | 119 | 0 |
| *Low Moor Better Bed Coal* (very pure) | 1 | 0 | ,, | 2 | 6 |
| Fireclay | 0 | 7 | ,, | 4 | 0 |
| Measures, with Elland Flagstone | 270 | 0 | ,, | 330 | 0 |
| Measures, with 3 thin coals (Yards, Band) | 176 | 0 | ,, | 250 | 0 |
| *Halifax Hard Coal* (*Gannister Coal*) | | | | 2 | 3 |
| Measures | | | | 30 | 0 |
| *Middle Band Coal* | | | | 0 | 10 |
| Measures | | | | 60 | 0 |
| *Halifax Soft Coal* | | | | 1 | 6 |
| Measures | 80 | 0 | ,, | 140 | 0 |
| Thin Coal and Fireclay | 1 | 0 | ,, | 7 | 0 |

Millstone Grit in several beds, with intervening shales.

*Fossil Remains.*—These have been summed up by Mr. Denny as consisting of 17 species of fish (placoid and ganoid). Of molluscs, 5 cephalopods, 17 conchifers and brachiopods. Crustacea, *Cythere* (Cypris). In the roofing shale of several of the coal-beds fish remains occur, and so plentifully in the case of one of these, at Middleton,

that the miners call it the "fish-coal." In the roof of the "Halifax coal," of the Lower Coal-measures, *Goniatites Listeri* is found throughout its entire course, sometimes beautifully preserved in iron pyrites, and with this is associated *Aviculo-pecten papyraceus*.

In the "Catherine Slack coal" near Halifax, *Nautilus Rawsoni* and *Orthoceras Steinhaueri* are frequent.

In the Middle Coal-measures there are bands of iron-stone, filled, over a great extent of country, with *Anthracosia* (Unio) and *Cythere* (Cypris).

*Extension of the Coal-field under the Permian and Triassic formations.*—Reserving to another chapter the full discussion of the question regarding the extent and form of the coal-field under the newer formations, I may here state that I share the opinion of those who consider it most probable that this great coal-field is really a basin, partially exposed, partially concealed; and that east of a line which may be drawn through Wakefield and Worksop in a direction N.N.W. and S.S.E., the strata may be expected to rise towards the east, and ultimately to terminate somewhere beneath the Lias of Lincolnshire. This axis will probably be found to pass a little east of Shireoak Colliery, where the dip of the

coals is slightly eastward, and which is consequently situated to the west of the axis.* Under this view of the subject it will be observed, on referring to the General Map, that there is a larger extent of Coal-measures concealed than exposed at the surface.

All along the edge of the escarpment of the Magnesian Limestone, and for a short distance beyond, in Notts. and Derbyshire, as far north as Rotherham, the coal-seams are found to dip eastward, at a greater angle than the Limestone itself, which, with the Lower Red Sandstone, rests unconformably on the Coal-measures. At Shireoak Colliery, the full thickness of 327 feet of the Permian beds was passed through in the shafts, which commence at the base of the New Red Sandstone. North of Wakefield, the beds generally tend to rise towards the north-east, near to, and under, the Magnesian Limestone; and in the centre of the coal-field, the Ackworth Rock (a red sandstone), which is an outlier, and is the highest known Carboniferous bed,

* Messrs. Lancaster and Wright state, in their description of the strata of Shireoak Colliery, that the dip decreases considerably eastward, the strata coming more into the form of a basin; the colliery is doubtless near the position of the axis.—Journ. Geol. Soc. Lond., vol. xvi.

represents the central position of the whole basin.*

The views of Professor Ramsay, the Commissioner who has reported on this subject, are so important that I take the liberty of quoting the general summary of them in his own words :—

"It has been shown in the evidence that the Yorkshire, Derbyshire, and Nottinghamshire coal-fields probably lie in the form of a basin, the northern, southern, and eastern edges of which lie underneath the New Red, Permian, and other overlying Secondary strata. The centre of this basin is the Ackworth rock, forming the topmost beds of the Coal-measures, about ten miles north of Rotherham, and about three miles west of the edge of the Magnesian Limestone. When the different subdivisions of the Coal-measure strata are extended underneath the Permian and New Red beds, and carried round concentrically from south to north, the area of available Coal-measures beneath the Permian and other overlying beds may be roughly estimated at about 900 square miles; this concealed portion of the

* See Professor Ramsay's views on this subject in the Report of the Coal-Commission, vol. i., pp. 136-8, in which the whole evidence is handled with great ability, and leads the Commissioner to adopt the view of the basin-like form of the coal-field.

coal-basin being approximately equal to the coal-field exposed at the surface. It is estimated that, exclusive of part of the Gannister beds, the whole of the important coals of the coal-field lie underneath the New Red Marl, etc., and even a small part of the Lower Lias, at depths of 4,000 feet and under; for the gradual increase of thickness due to the coming on of successive formations of Magnesian Limestone, New Red Sandstone, Red Marl, and Lias, is probably compensated for by the gradual rise of the eastern edge of the basin towards the base of the lowest formation overlying the Coal-measures. If this assumption be correct, then deducting the amount given by Mr. Woodhouse as proved under the Permian formation, namely, 8,306,140,050 tons, there remains about 23,083,000,000 tons still further available, a great part of which will lie at depths under 3,000 feet.

"Area east of the Permian escarpment:—

| | Tons. |
|---|---|
| 672 square miles, 40 feet coal . | 26,768,179,200 |
| 132 ,, 20 ,, . | 4,620,697,600 |
| | 31,388,876,800 |
| Deduct proved under Permian beds | 8,306,140,050 |
| | 23,082,736,750" * |

* This is the gross estimate, not the "available" net quantity after deductions.—See Report, p. 31.

*Depth of the Top Hard Coal along eastern border.*—As the Magnesian Limestone is everywhere unconformable to the underlying Coal-measures, we find it resting indifferently on all the beds from the Millstone Grit, N.E. of Leeds, to the highest beds of the Coal-measures opposite Barnsley. The depth of the Top Hard Coal will, therefore, everywhere vary, and the following are its proved or estimated depths at various points from north to south,* along the margin of the Limestone:—

1. East of Barnsley and the Ackworth Rock, to Top Hard Coal, 1,850 to 1,900 feet; and to Silkstone Coal, 2,850 to 2,900 feet.
2. Under Bolsover, to Top Hard Coal, 900 to 950 feet; to Lower Hard Coal, 1,500 to 1,550 feet.
3. Opposite Torkard, to Top Hard Coal, 1,236 feet.
4. Opposite Kirkby Woodhouse, to Top Hard Coal, 700 to 750 feet.
5. Under Newstead Abbey, to Top Hard Coal, from 1,500 to 1,600 feet.
6. Under Felley Abbey, to Top Hard Coal, 800 feet.

*Thickness of the Magnesian Limestone.*—This formation increases in thickness northward, partly by the swelling out of the strata, and partly by the appearance of new beds. The following estimates of thickness at several points

* Coal-Commission Report, vol. i., p. 137.

have been prepared by Mr. Russell, of the Geological Survey:—

| | | |
|---|---|---|
| In the neighbourhood of Longhills, near Hucknall Torkard | about | 100 feet. |
| Near Annesley | „ | 120 „ |
| Near Kirby Forest | „ | 100 „ |
| Near Warsop | „ | 140 „ |
| Near Shireoaks | | 318 „ |
| Near Doncaster | „ | 360 „ |
| At Custon Park | | 262 „ |
| At Byram Hall (4 miles N.E. of Pontefract) | | 312 „ |

*Resources.*—The estimates of the resources of this coal-field, as far as it extends westward of the Magnesian Limestone, and a certain tract under this formation, where the coal has been proved by actual mining, were entrusted to Mr. J. T. Woodhouse, one of the members of the Coal-Commission. These estimates considerably exceed those made by myself, partly as including seams under two feet in thickness, and partly because Mr. Woodhouse from the gross sum has made a smaller proportionate deduction for waste, and the quantity extracted, than that by myself. In this latter point I now feel satisfied he has formed a truer estimate, and I, therefore, willingly substitute his figures for my own; but if I also adopt the larger figure he gives for the amount available it is under protest against

including very thin seams for great depths. In adopting this course, however, Mr. Woodhouse was only following the rule laid down by the whole of the Commissioners for their own guidance.

| | |
|---|---|
| 1. Area of Coal-field, beyond the margin of the Magnesian Limestone and Permian . . . . | 760 square miles. |
| 2. Greatest thickness of productive Coal-measures, including the Lower series . . . . | 4,500 feet. |
| 3. Average number of workable coal-seams above 2 feet, 15; giving a vertical thickness of coal . . | 46 ,, |
| 4. Average number from 1 foot upwards, 20, with . . . | 53 ,, |
| 5. Quantity of coal remaining unworked (4,500 feet) . . . | 24,441 millions of tons. |
| 6. Quantity available for consumption down to a depth of 4,500, 13,747,000,000; deduct for quantity beyond limit of 4,000 feet, 1-9th,* leaving net available quantity down to 4,000 feet . | 12,220 ,, |
| 7. Area overspread by Permian, Trias, and Lias, as estimated by Professor Ramsay† . . . . | 900 square miles. |
| 8. Total quantity of coal under this area, at a depth not exceeding 4,000 feet. . . . . | 23,082 millions of tons. |

* I have been obliged to make the reduction from Mr. Woodhouse's estimate, in order to keep within the limit of 4,000 feet.

† See *ante*, p. 246.

9. Deduct for quantity not available from various causes, 1-3rd (7,694 mil. tons), leaving for future use . 15,388 millions of tons.

*Summary.*

| | |
|---|---|
| 1. Net available quantity of coal of exposed coal-field . . . . . | 12,220,000,000 |
| 2. ,, ,, ,, concealed coal-field | 15,388,000,000 |
| Total available supply . | 27,608,000,000 |

The produce of this coal-field has taken a great bound forward during the last ten years, having increased from 12,497,100 tons in 1859, to 17,865,367 tons in 1869, or nearly 50 per cent.; the number of collieries has also increased from 559 to 579 in the same period, and of these several are situated on the Magnesian Limestone. The produce for 1870 was 17,824,241 tons.*

* "Mineral Statistics," 1870.

# CHAPTER XXI.

## GREAT NORTHERN COAL-FIELD OF DURHAM AND NORTHUMBERLAND.

The general succession of the strata and their relative position over the area of this coal-field is similar to that of Yorkshire, so that one section will serve to illustrate the structure of both. I must therefore beg the reader to refer to the transverse section at the commencement of the last chapter (Fig. 18, p. 232).

The Great Northern coal-field extends from Staindrop near the north bank of the Tees, on the south, to the mouth of the Coquet, where it enters Alnmouth Bay, on the north, the distance being nearly 50 miles. Its greatest diameter is near the centre, along the course of the Tyne, which forms the great highway for the export of coal to the London market.*

From the Coquet to the Tyne the North Sea

* I have calculated the area of this coal-field from Mr. W. Oliver's map in the *Mining Record* office. There are some interesting details in "Our Coal and our Coal-pits," published by Messrs. Longman.

# MAP OF THE COAL-FIELD OF NORTHUMBERLAND AND DURHAM

Scale in Miles

0 1 2 3 4 5 6 7 8 9 10

New Red Sandstone

Magnesian Limestone &c (Permian)

Coal measures with Coal-crops

Millstone Grit & Yoredale Beds

Coal-crops

FAULTS

Basalt Dykes of Tertiary Age

Dip of Strata

Dip of Coal-measures beneath Permian

Collieries

Villages

Warkworth
R. Coquet
Coquet Island
Hauxley
Acklington
Felton
Druridge Bay
Widdrington
Ulgham
Ellington
Snab Point
R. Lyne
Woodhorn
Newbiggin
Bothal
Morpeth
Milford
R. Wansbeck
Seaton Rocks
Stannington
Seaton Rd
Seaton Colliery
St Mary's Island
Seghill
Backworth
Ponteland
Tynemouth
N. Shields
St Andrews
S. Shields
NEWCASTLE
Jarrow
Whin Dyke
Heworth
R. Tyne
Wickham
Colliery
Colliery
Colliery
West Boldon
Burley
SUNDERLAND
R. Wear
Painshaw
Newbottle
R. Derwent
Chester le Street
Seaton Harbour
Lumley
Hetton
Red Acre
Witton
Dryburn
Elemore Colliery
DURHAM
Horden Pt
Wolsingham
Hartlepool
Approximate Base of Coal-measures beneath New Red Sandstone and Permian
Barnard Castle
MOUTH OF THE TEES
Stockton
Darlington
Tees R.

LOWER COAL MEASURES
SPLINT COAL
LOW MAIN
GREY SEAM
HIGH MAIN
ENGINE COAL
LOWER COAL MEASURES
LOW MAIN COAL
LOW MAIN COAL
LOWER COAL MEASURES

N O R T H S E A

Stanford's Geogr.l Estabt London

London: Edward Stanford, 6 & 7 Charing Cross.

forms the limits of the coal-field. South of this the escarpment of the Lower Permian Sandstone and Magnesian Limestone forms the boundary at the surface; but the Coal-measures underlie these newer rocks; and since Dr. William Smith,* first on theoretical grounds, and afterwards by actual experiment, demonstrated the existence of the coal-field at Haswell near Durham, both the Triassic and Permian formations have been perforated over a large area, especially at Seaham and Ryhope in Durham.

*Form and structure of the Coal-field.*—Recent observations have tended to confirm the opinion, that the structure of this coal-field is that of a trough, or irregular basin, of which the longer axis lies in a north and south direction, stretching from the apex near the mouth of the Coquet, through North Seaton and Jarrow Collieries on the north of the Tyne, and through Monkwearmouth Colliery,† below the Magnesian Limestone to the south of that river.‡ The examination of the coast section north of the Tyne, the results of which are laid down on the Geological

* About half a century ago.

† At this colliery the coal-seams descend to a depth of 2,268 feet below the surface.

‡ This view is supported by Professor Ramsay, and by Mr. H. H. Howell, of the Geological Survey, in his evidence before the Coal-Commission.—See Report, vol. i., p. 138.

Survey maps by Mr. Howell, places it beyond question that the beds rise towards the north-east, or in the seaward direction. Nor is there any reason to suppose this to be a mere local uprising of the strata; on the contrary, it must be considered as the commencement of a normal arrangement ultimately resulting in an easterly outcrop under the sea-bed itself.

The southern limits of the basin are also capable of being defined with tolerable accuracy. The Magnesian Limestone which (with the Lower Permian Sandstone has been pierced by several coal-shafts), rests unconformably on the coal-formation, and near Hartlepool some of the seams have been proved to rise towards the south, and terminate against the bottom of these newer rocks. The lowest workable coal-seam, called the "Brockwell" coal, passes at its outcrop under the Magnesian Limestone immediately east of Shildon, dipping to the north-west at an angle of 15° to 18°.* This then gives us the line of the southern margin, which Professor Ramsay considers may be drawn from Seaton Carew, north of the entrance to the Tees, westward to Middridge Grange, four miles south-east of Bishop Auckland. To the south of this line,

* Mr. Howell, Evidence, *supra cit.*

the Permian and Triassic strata would be found to overlie only Millstone Grit and Yoredale rocks.*

The regularity of the basin-like form towards its southern margin is somewhat interrupted by the presence of a fault, known as the "Butter Knowle Dyke," which ranges in a W.S.W. and E.N.E. direction, depressing the strata on the south to the extent of 700 feet, and bringing in the upper measures with all the coal-seams from the "Five-quarter" downward under the Permian rocks at Leasingthorne, Black Boy, and Eldon Collieries.† To the south of this fault the strata dip rapidly toward the N.N.W., thereby bringing the lowest seams in contact with the overlying Permian formation, and ultimately the Millstone Grit itself, from its visible outcrop near Heighington, eight miles north-west of Darlington.‡

* Professor Ramsay, *Ibid.* Sir R. Murchison, in his Address, delivered at Nottingham, has expressed a doubt of the extension of the coal-measures south of the Tees, where they were bored for at Middlesborough by Mr. Vaughan, to a depth of 1,800 feet. At the bottom of the bore-hole, rock-salt was encountered, but even the Permian Magnesian Limestone had never been reached. See Sir R. Murchison "On parts of England where Coal may, or may not be looked for."—Trans. Brit. Assoc. Nottingham, 1866.

† See map, section, and description of the Northern Coal-field, by Mr. Dunn, Trans. North of England Institute of Mining Engineers, vol. xii.

‡ Mr. George Elliot, Rep. Coal-Commission, vol. i., p. 26.

From below the coal-field of Durham and Northumberland the Lower Carboniferous Rocks rise towards the west and north into swelling moorlands, and ultimately into the mountainous tract of the Pennine chain, attaining at Hedge Thorpe a height of 2,347 feet, and at Yevering Bell, 2,000 feet.

*General Series of Formations.**

New Red Sandstone.—Red sandstone and conglomerate.

| | | |
|---|---|---|
| Permian Rocks. Magnesian Limestone, 600 to 700 feet. | 1. Upper Permian marls, with gypsum . . . . | 100 ft. |
| | 2. Crystalline limestone, with *Schizodus Schlotheimi*, and *Mytilus septifer*. | |
| | 3. Brecciated limestone (Tynemouth Cliff), lying on— | |
| | 4. Fossiliferous limestone, with *Productus*, *Strophalosia*, *Athyris*, *Avicula*, etc., and numerous bryozoa. | |
| | 5. Compact limestone, with similar fossils. | |
| | 6. Marl slate, calcareous shales, and thin-bedded limestone, with fishes of the genera *Palæoniscus*, *Acrolepis*, *Platysomus*. | |
| | 7. Lower Permian sandstone, with gypseous marl, *Pinnites Brandlingi*. *Trigonocarpum*, *Sigillaria reniformis*, *Calamites approximatus* . | 200 ,, |

* From the works of Professors Sedgwick and King.

| | | |
|---|---|---|
| Coal-measures, 2,030 feet. | 1. Upper series, with thin coals, and a band of ironstone, with *Anthracosia*, *Lingula Credneri*, *Cypris* or *Cythere inflata*, *Holoptychius Hibberti* | 900 ft. |
| | 2. Middle series. From the "High Main Coal" to the "Brockwell Coal" . . . | 2,000 ,, |
| | 3. Lower Coal-measures, with 2 beds of coal, between 2 and 3 feet thick . . | 150 ,, |
| Millstone Grit — Coarse grits and shales . . | | 414 ,, |
| Yoredale Rocks — Shale, with bands of limestone and thin coals . . . | | 540 ,, |
| Scaur Limestone*—Ten beds of limestone, parted by as many beds of shale, containing coal-seams in Northumberland, upwards of | | 1,120 ,,† |

*Coal-seams.* ‡—The most important coal in the Newcastle district is the "High main" or "Wallsend" seam. It is the highest workable coal, and varies from 5 to 6 feet in thickness. It is traversed by the "90-fathom" dyke, and is persistent in its general character to its northern and western outcrop, but southward towards the valley of the Wear is split up into

* Professor Phillips' "Manual of Geology," p. 163.

† For a list of the fossils of the Permian and Upper Coal-measures, see Mr. J. W. Kirkby, Journ. Geol. Soc., vol. xvi., p. 412.

‡ For the details of the coal-seams, I am indebted to Mr. Dunn, late Inspector of Collieries.

two seams by the intercalation of sandstone and shale.

The "Bensham" seam, 20 fathoms below the "High Main," is very variable in its qualities, and is often unworkable. It acquires its chief value towards the east, and is worked extensively under the Magnesian Limestone at Sunderland. Its general thickness is 6 feet.

The "Low Main" seam is known to range from Widdington on the north to Ferry Hill on the south, a distance of about 40 miles. This coal, south and west of Newcastle, is moderately soft, and excellent for household use and coking. But passing northwards its character changes; it becomes very hard and less gaseous, and constitutes the most important bed of steam-coal. Below these lie several other seams, which will become more extensively worked as the supply from the valuable beds above described becomes curtailed.

The following is a list of the general series of coal-seams, for which I am indebted to Mr. Dunn:

*Coal-series of Northumberland and Durham.*

(NEWCASTLE DISTRICT.)

| | | Ft. | In. |
|---|---|---|---|
| | Upper Coal-measures . . . | 900 | 0 |
| 1. | *High Main Coal* . . . . | 6 | 0 |
| | Strata . . . . . | 33 | 0 |

| | | Ft. | In. |
|---|---|---|---|
| 2. | *Metal Coal* | 1 | 6 |
| | Strata | 33 | 0 |
| 3. | *Stone Coal* | 1 | 6 |
| | Strata | 63 | 0 |
| 4. | *Yard Coal* | 2 | 10 |
| | Strata | 63 | 0 |
| 5. | *Bensham Coal* | 2 | 10 |
| | Strata | 78 | 0 |
| 6. | *Five-quarter Coal* | 3 | 0 |
| | Strata | 48 | 0 |
| 7. | *Low Main*, or *Hutton Coal* | 6 | 0 |
| | Strata | 60 | 0 |
| 8. | *Crow Coal* | 2 | 10 |
| | Strata | 24 | 0 |
| 9. | *Five-quarter Coal* | 3 | 8 |
| | Strata | 30 | 0 |
| 10. | *Ruler Coal* | 1 | 10 |
| | Strata | 96 | 0 |
| 11. | *Townley*, or *Harvey Coal* | 3 | 1 |
| | Strata | 42 | 0 |
| 12. | *Jelly Coal* | 2 | 2 |
| | Strata | 42 | 0 |
| 13. | *Stone Coal* | 2 | 5 |
| | Strata | 18 | 0 |
| 14. | *Five-quarter Coal* | 3 | 4 |
| | Strata | 30 | 0 |
| 15. | *Three-quarter Coal* | 2 | 6 |
| | Strata | 54 | 0 |
| 16. | *Brockwell Coal* | 2 | 11 |

The series below the Low Main coal is taken at Blaydon and Wylam, as the coals have never yet been worked at Newcastle.

*Basaltic Dykes.*—The coal-field is traversed by

several narrow basaltic dykes, generally ranging a little south of east, and running for several miles in nearly straight lines.* The beds of coal on approaching these dykes become anthracitic, and ultimately worthless. One of the dykes crosses the Tyne a short distance below Newcastle; others reach the coast at Hartley and Blyth. The Cock-field Fell Dyke, in South Durham, ranges from W.N.W. to E.S.E. There is also a system of natural fissures, called "cleats," ranging N.N.W.

*Faults.*—One of the largest of these is the "Ninety-fathom Dyke" of Denton Colliery. Along its course the strata are depressed on the north side to the extent of 200 fathoms between Gosforth and Killingworth.† Most of the East and West faults do not traverse the Magnesian Limestone, being anterior to its formation.

*Coal under the Sea.*—To what distance from

* These dykes cut across the faults, and all the newer strata of the North of England, and are consequently of very recent origin, geologically speaking. As they point westward in the direction of the great Tertiary outbursts of basaltic rocks, and on other grounds, Mr. Geikie considers them to belong to the age of the Miocene basalts and dolerites of the West of Scotland and North of Ireland.—Trans. Brit. Assoc., 1867, Presidential Address, Geol. Section, p. 51.

† As I am informed by Mr. H. H. Howell, of the Geological Survey.

the shore coal will be available, is a question which cannot be directly answered, as every seam presents the problem under a different aspect. Questions regarding depth, thickness, regularity, and absence of faults, as well as the nature of associated strata, are here presented in relation to the coal-seams themselves; and depth of sea-bottom in relation to the sea. In every case a considerable breadth of coal where it approaches the outcrop must necessarily be left as a barrier; and it is unquestionable, that faults traversing the strata under the sea, at a considerable depth and pressure of water, and especially if there are beds of porous sandstone overlying the coal-seams, would give facilities for the influx of sea-water into the mines so as to prevent or impede the working of the coal.

With reference to this special coal-field, Mr. Elliot considers that, in that portion of the district south of the Tyne, a minimum distance of $3\frac{1}{2}$ miles may be included as available; and that it is possible that a much wider extent will ultimately be worked by means of shafts sunk below the sea itself at a distance from the shore;* on the other hand, Mr. Forster assumes a distance of only two miles in breadth along the

* Report, Coal-Commission, vol. i., p. 26.

coast for that part of the coal-field north of the Tyne. This difference of opinion, on the part of gentlemen of such experience in mining undertakings, is a sufficient proof that the question is at present involved in much uncertainty.

In the following estimates of resources, I have adopted those of the Commissioners, after rejecting all seams from 18 inches in thickness downwards, amounting to about 176 millions of tons; at the same time that I adopt their estimates of the quantity available below the sea to a distance of 2 and 2½ miles from the shore respectively.

*Resources.*

In estimating the extent of this coal-field, we must include not only the area of the visible tract of Coal-measures beyond the limits of the Permian formation, but that also which is concealed beneath this formation, though now very nearly proved over its whole area. Along with this is included, by Mr. Forster, 40 square miles of sea-covered coal, of an aggregate thickness of 14 feet, distributed into four seams; and by Mr. Elliot 71 square miles, with an aggregate thickness of 30 feet distributed in six seams.*

* If I understand Mr. Elliot rightly, he takes a breadth of 7 miles out to sea, giving 1,500 millions of tons for the area

| | | |
|---|---|---|
| 1. | Area of visible coal-field, beyond the limits of the Permian and New Red Sandstone . . | 460 square miles. |
| 2. | Area of concealed coal-field . . | 225 ,, |
| 3. | Area under the sea supposed to be available . . . . | 111 ,, |
| 4. | Number of workable seams from 18 inches upwards, 16; giving a thickness of available coal . | 46 feet. |
| 5. | Net available quantity of coal on land, after necessary deductions for loss, etc. (Northumberland). | 2,576,000,000 tons. |
| 6. | Net available quantity under the sea | 403,000,000 ,, |
| 7. | Net available quantity on land (Durham), including seams down to 12 inches in thickness, 3,988,000,000 tons; deduct 1-16th for seams from 18 inches downwards, as determined in Mr. Forster's district; leaving . | 3,738,750,000 ,, |
| 8. | Quantity under the sea (Durham Coast), including a breadth of 3½ miles, with an area of 71 square miles . . . . | 734,500,000 ,, |
| | Total . . . | 7,452,250,000 ,, |

## *Mountain Limestone District of Northumberland.*

Far down in the Carboniferous Limestone series of the North of England occur beds with

beyond the minimum limit of 3½ miles. How does he intend to guard against storms in the cases of his submarine shafts? Unless situated on an island, a N.E. gale would sweep away any colliery that could be planted.

workable coal, which in Scotland increase in number and economic value. They form coal-fields bordering the Tweed and its tributaries in Northumberland, and the Esk in Dumfriesshire. Though marked on the map as coal-fields, it is to be recollected that they are of much earlier date than the great coal-tracts of Durham and Yorkshire. The coal-seams underlie, for the most part, several thick beds of Carboniferous Limestone; and in turn repose on red sandstones of the Tweed. Mr. N. Wood has rightly referred these red sandstones, not to the Devonian, but to the Carboniferous period; for, as I am informed by Prof. Geikie, a thick series of Lower Carboniferous strata intervenes between them and the true Old Red Sandstone of Scotland.

Mr. Wood,* who has given a full account of these Lower Carboniferous coals of Northumberland, states that they are worked at Talkin, Tindal Fell, Fourstones, Acomb, and Fallowfield. A very interesting section of the series is tabulated by Mr. Hutton, from the Millstone Grit down to the "4-feet seam" of Tindal Fell, for which I must refer the reader to the memoir itself.†

* Trans. Nat. Hist. Soc. Northumberland, vol. i.

† *Ibid*, vol. ii., p. 24.

The available quantity of coal in this district has been estimated by Mr. Forster at 665,180,000 tons, or, rejecting all seams under 18 inches, at 580 millions of tons, which, added to the former, gives a total available quantity from the Carboniferous rocks of this part of England,—

| | | |
|---|---|---|
| 1. Upper Carboniferous coal | . | 7,452,000,000 |
| 2. Lower Carboniferous coal . | . | 580,000,000 |
| Total . . . | . | 8,032,000,000 tons. |

Notwithstanding that the Great Northern coal-field has been drawn upon more heavily than any other of the British coal-fields, and for a larger period, the produce has rapidly increased during the last quarter of a century. This is partly due to the creation, and prodigious expansion, of iron-manufacture along the estuary of the Tees, which has its centre in Middlesborough; and partly to the enormous demands from the metropolis of England.

In 1859, the produce of this coal-field was 16,001,125 tons from 183 collieries; in 1869, or ten years later, the produce reached 25,765,430 tons from 297 collieries; and of this 4,959,647 tons were converted into coke, chiefly for iron-smelting. In 1870 the produce was 27,613,539 tons.*

* "Mineral Statistics," for 1859, 1869, and 1870.

## CHAPTER XXII.

### COAL-FIELDS OF SCOTLAND.

It will be observed, on looking at a geological map of Scotland, that the series of formations of which that country is composed, are arranged in bands crossing the island from south-west to north-east, and, on the whole, parallel to the central range of the Grampian mountains.

The Carboniferous series of Scotland forms one of these bands, stretching from sea to sea, and occupying a trough between the southern slopes of the Grampians on the one side, and the indented flanks of the "Southern Uplands," composed of Old Red Sandstone and Silurian rocks, stretching from Kirkcudbrightshire to Berwick, of which the Lammermuir, Moorfoot, and Lead Hills form a part. The height of many of these hills is considerable. Merrick Hill reaches an elevation of 2,751 feet, Cairns-

Muir-of-Deugh 2,597, Black Larg 2,890,* and Black Hope Scar 2,136 feet.

The western margin of the Carboniferous area is washed by the Firth of Clyde, and the river itself drains a large tract of the great central coal-basin. The eastern limit is the North Sea on both shores of the Firth of Forth. The northern boundary line leaves the river Clyde east of Dumbarton, passing along the southern slopes of the Kilpatrick, Campsie, and Stirling Hills, and continuing by Kinross and Cupar enters the sea at St. Andrew's Bay.

The southern boundary is much indented in some places, but ranges in a north-easterly direction from Girvan, on the Ayrshire coast, to Dunbar. Throughout the greater part of its course the line of junction between the Carboniferous and Older Palæozoic formations is a fault, with a downthrow to the north, which has been traced on the maps of the Geological Survey. The extreme length from the coast of Ayr to Fifeness is 94 miles, the average breadth 25 miles

This great range of Carboniferous rocks is not all productive of coal; hence the coal-bearing series forms several distinct fields or "basins,"

* According to the Geological Map of Scotland, by Professor Nicol.

separated either by physical barriers, as firths and rivers; or by the uprising of the Lower unproductive Carboniferous, or Devonian, rocks from which the coal-series has been swept away. These separate fields may be thus denominated: 1. The coal-field of the Clyde Basin. 2. Mid-Lothian and Haddington coal-field. 3. The Fife-shire coal-field. 4. The Clackmannan coal-field. 5. The Ayrshire coal-field. 6. The Lesmahago coal-field.

*Geological Age of the Scottish Coal-fields.*—A large number of the workable coal-beds of Scotland is included in the Carboniferous Limestone series; while, at the same time, there are coal-seams referable to the Millstone Grit, and true Coal-formation of central England. Owing to denudation, this upper series has a comparatively limited range, forming the "flat coal-group" of the centre of the basins.

If we observe the gradual change which the Lower Carboniferous rocks of England undergo in their extension from the midland counties into Northumberland and South Berwickshire, we shall be prepared for their remarkable mineralogical character as developed in Scotland. In Derbyshire, the Carboniferous Limestone consists of a mass of calcareous rocks at least 4,000 feet

in thickness, once formed in a sea teeming with animal life, almost destitute of sedimentary materials, and entirely so of coal. Farther north, in Lancashire and Yorkshire, workable coal-seams are found at a stage earlier than the true Coal-measures—namely, in the Millstone Grit, associated with fossil shells allied to those of the Carboniferous Limestone. Still farther north, the bold coasts of Northumberland exhibit the great Limestone formation opening out into different courses, and including thick beds of shale, and several coal-seams; one of the calcareous bands, near the centre of the group, being characterised by *Posidonomya Becheri*, a fossil belonging to the "Calp" of Ireland, and the Culm limestone in Devonshire.* These coals of Northumberland have been shown by Mr. N. Wood to be situated near the base of the Carboniferous Limestone, and are worked over a considerable tract of country.† They occupy exactly the position of the Lower Coal-series of Scotland; but in this latter country, the sedimentary strata receive a great augmentation of volume, while the calcareous beds are proportionally diminished. Instead of the solid beds of limestone of Derby-

* Murchison, "Siluria," 3rd edit., p. 311.

† Trans. Nat. Hist. Soc. Northumberland, vol. i., see p. 264.

shire, we find in the Lothians, and the Clyde Basin, a thick series of sandstones, shales, black-band ironstones, and coal-seams, with occasional beds of marine limestone, containing fossils of the Carboniferous Limestone period.

### *General Succession of the Carboniferous-series of the Centre of Scotland.*

The whole of the Carboniferous rocks are divisible into four groups, which in Fifeshire, Haddingtonshire, and Berwickshire repose conformably upon the Old Red Sandstone, which seems to graduate into the lowest Carboniferous strata.*

| | Divisions. | English equivalents. |
|---|---|---|
| 4. *Coal-measures.* | Red sandstones (Hamilton), white and grey sandstones, shales, fire-clays, coal-seams, and ironstone. | Middle and Lower Coal-measures. |
| 3. *Millstone Grit* | Moorstone-rock, or Roslin sandstone, and conglomerate. | Millstone Grit & Yoredale-series. |
| 2. *Carboniferous Limestone-series.* | Sandstones, sometimes coarse, shales, coals, black-band and clay-band ironstones, oil-shales, and fossiliferous limestones. | Carboniferous, or Mountain Limestone. |

* Jukes' "Man. of Geology," edit. by Geikie, 3rd edit., p. 583; "Geology of Edinburgh," Mem. Geol. Survey. "The Carboniferous Formation of Scotland," by James Geikie, 1871 (Glasgow).

| | Divisions. | English equivalents. |
|---|---|---|
| 1. *Calciferous Sandstone-series.* | *b.* White and grey sandstones, shales, cement-stones, Cyprid-limestones, and occasional coal-seams. | Lower Limestone shale. |
| | *a.* Red and purple sandstones and conglomerates. | |

With the exception of, probably, the upper division, and occasional beds of estuarine or fresh-water strata, the whole of the above series may be regarded as of marine origin, attaining a combined thickness of 8,000 or 9,000 feet. The strata-beds are largely intermixed with rocks of plutonic and volcanic origin, and in Ayrshire are overlaid unconformably by representatives of the Permian system, which occupy a small tract near the centre of the coal-field.* With this general introduction, I now proceed to give some details regarding the individual coal-fields.

* Messrs. A. and J. Geikie—"Explanation of Sheet 14" (Ayrshire), Mem. Geol. Survey, p. 22.

# CHAPTER XXIII.

## 1. COAL-FIELD OF THE CLYDE-BASIN.

This Basin includes portions of Renfrewshire, Dumbartonshire, Stirlingshire, and nearly the whole of Lanarkshire; and is traversed throughout its whole length by the River Clyde, along whose banks, above Glasgow, fine sections of the strata are laid open. At the base of the whole series are the Lower Calciferous Sandstones, which are overlaid by the higher beds of this division, and with which are associated great sheets of contemporaneous traps, ashes, and agglomerates, which form the general base of the coal-bearing strata of the district.

These volcanic rocks of the Lower Carboniferous period rise into terraced hills, both to the north and south of the Clyde Valley, stretching from Dumbarton to Stirling, by Kilpatrick and Campsie, and from Greenock, by Neilston, to the neighbourhood of Stonehouse, where, how-

ever, along the valley of the Avon, they are unconformably overlapped by the Carboniferous Limestone-series, which rests directly on the Old Red Sandstone.* Towards the east, the Lanarkshire coal-field is separated from those of the Lothians by the uprising of the Calciferous Sandstone-series, which in the district of Linlithgow attains a thickness of nearly 4,000 feet.

*Trap Rocks.*—Besides the great sheets of felstones, porphyrites, and melaphyres, which were poured out at the earlier stage of the Carboniferous period, the strata are invaded by other igneous rocks, referable to at least two periods. These occur as irrupted sheets of melaphyre and dolerite, which have been intruded amongst the coal-strata in a fluid state, and are frequently the cause of much loss or difficulty in mining operations.† These rocks are probably referable to the age of the Upper Carboniferous-series themselves, or possibly of the Permian. In addition to these intrusive sheets, there are also vertical dykes of basalt and dolerite, which range in nearly east and west lines for miles through the

* Mr. James Geikie, *supra cit.*, p. 5.

† One of these sheets forms the prominent ridge on which the Glasgow Necropolis is situated, from which a noble view of the Clyde Valley and of the city of Glasgow, with the venerable Cathedral, is to be obtained.

strata, and have been referred, with much probability, by Professor Geikie, to the Miocene Tertiary period.* There are thus to be found amongst the Carboniferous rocks of the West of Scotland plutonic or volcanic rocks, referable to at least three periods, the last of which was separated by a long lapse of geological time from the two which preceded it.

*Coal-series.*—The general succession of the coal-series in Lanarkshire is illustrated by a vertical section by Mr. Ralph Moore, of which the following is a synopsis :—

| | |
|---|---|
| *Upper Series*, 840 feet. | *b.* Red Sandstones of Hamilton and Blantyre, slightly unconformable to the underlying strata (*a*), 200 feet. |
| | *a.* From the Upper Four-feet Coal downwards, with ten coal-seams from two feet and upwards in thickness ; also with the "Palace Craig," the "Airdrie" and "Slaty" black-band ironstones. |
| *Middle Series*, 960 feet. | From the "Moorstone Rock," or Millstone Grit, not well represented in this district, down to the Garnkirk limestone. |
| *Lower Series*, 2,200 feet.† | Six courses of marine limestone from the Garnkirk bed downwards to that which overlies the Hurlet coal. Three courses of black-band ironstone, and several beds of valuable coal. |

* Address to the Geol. Section of the British Association, Dundee, 1867.

† Along the southern margin of the coal-field, and beneath

Mr. William Moore, in a valuable communication to the Philosophical Society of Glasgow, presents us with the following succession of the coal and iron beds of that part of the coal-field lying along the valley of the Clyde:—

*Coal and Ironstone Series in the Valley of the Clyde.*

| Depth. Fathoms. | | Thickness. Ft. | In. |
|---|---|---|---|
| 42. | *Palace Craig Ironstone* (impure) | | |
| 48. | Upper Coal (good) . . . | 3 to 4 | 6 |
| 63. | Ell Coal (good) . . . . | 4 ,, 8 | 0 |
| 67. | Pyotshaw Coal (splint) . average | 4 | 0 |
| 68. | Main Coal (good, soft quality) . | $3\frac{1}{2}$ ,, 5 | 0 |
| 76. | Humph Coal . . . . | 1 | 8 |
| 81. | Splint Coal (for iron smelting) . | 3 | 0 |
| 84. | Sour Milk Coal (variable) . . | 3 | 0 |
| 103. | *Mushet Black-band Ironstone* . | 1 | 4 |
| 106. | *Soft-band Ironstone* . . . | 1 | 8 |
| 120. | *Curly Band Ironstone* . . | 0 | 5 |
| 127. | Virtue Well Coal . . . | 2 | 6 |
| 132. | *Bellside Ironstone* . . . | 0 | 7 |
| 134. | *Calderbrae Ironstone* . . . | 0 | 8 |
| 136. | Kiltongue Coal (variable) . . | 5 | 0 |
| 148. | Drumgray or Coxrod Coal . . | 2 | 0 |
| 203. | *Slaty Black-band Ironstone* . . | 1 | 6 |
| 203. | Boghead Gas Coal (1 to 20 inches) | 0 | 10 |
| 447. | *Possil Ironstone* . . . . | 1 | 0 |
| 467. | Lesmahago Gas Coal . . . | 1 | 0 |
| 502. | *Govan Band Ironstone* . . | 1 | 0 |

the great sheets of contemporaneous trap, there occurs a remarkable series of shales and earthy limestones, described by Mr. John Young under the name of the "Ballagan beds." They are almost unfossiliferous, and may probably be regarded as a lake deposit.—See J. Young, "Geology of the Campsie District," Trans. Geol. Soc. Glasgow, vol. i., p. 22.

*Black-band Ironstones.*—These valuable minerals occur in the Carboniferous Limestone-series, the uppermost being the Airdrie band, discovered by David Musket about the beginning of the present century. It is about sixteen inches in thickness, but is nearly all wrought-out.* The black-band ironstones, west of Glasgow, not unfrequently pass into coal-seams, the carbonaceous matter gradually replacing the argillaceous carbonate of iron; while less frequently they pass into clay bands.

*Gas Coals.* — A valuable, but thin, bed of cannel occurs to the west and south of Glasgow, amongst the upper beds of the Limestone-series, and is supposed with good reason to be identical with the Lesmahago cannel, so valuable for the production of gas. Associated with the same series are occasional beds of oil-shale.

*The Boghead Gas Coal* is the most remarkable of all the "Parrot coals" of Scotland for the quantity of oil and solid paraffine which it is capable of producing. It is from eighteen to twenty inches in thickness, resting on a floor of fireclay with *Stigmaria ficoides*, and overlaid by oil-shales, and occasionally black-band ironstone,

* Mr. W. Grossart "On the Upper Coal-Measures of Lanarkshire," Trans. Geol. Soc., Glasgow, vol. iii.

in which marine shells of the genera *Discina*, *Lingula*, *Conularia*, *Axinus*, with *Anthracoptera*, have been discovered.*

### *Fossil Remains.*

The organic contents of the Carboniferous rocks of the Clyde Basin have been very ably determined by several geologists of the district, and the results published in the Transactions of the Glasgow Geological and Philosophical Societies. A brief summary is all that can be inserted here.

*Upper Series.*—This series, lying above the horizon of the Garnkirk Limestone, is characterised by molluscs of the genera *Anthracosia*, *Anthracomya*, and *Anthracoptera;* with fish of the genera *Platysomus*, *Cœlacanthus*, *Palæoniscus*, *Rhizodus*, and *Megalichthys*, all of which may be either fresh-water, brackish, or marine. But a fossiliferous band, full of undoubtedly marine genera, has recently been detected high up in this series, by Mr. Whyte Skipsey, in a position about sixty fathoms above the "Ell Coal" (see section above), taken from a colliery at Drumpeller, east of Glasgow. The following

* Mr. Grossart, *Ibid*, 107.

were identified: *Productus scabriculus*, *Discina nitida*, *Conularia quadrisulcata*, *Bellerophon Urii*, and fragments of pentagonal stems of a crinoid.* The occurrence of this marine band reminds us of a similar instance which I have already described in the case of the Lancashire Coal-field. †

*Lower Series.*—The Carboniferous Limestone-series is abundantly loaded with marine forms, of which a very full list is given by Mr. J. Young,‡ for the Campsie district, of which the following is a selection:—

*Echinoderms.*—Archæocidaris Urii, Actinocrinus.

*Annelids.*—Spirorbis carbonarius, Serpulites carbonarius.

*Crustacea.*—Bairdia Hisingeri, Beyrichia arcuata, Cythere ventricornis.

*Polyzoa.*—Ceriopora interporosa, Fenestella plebeia.

*Brachiopoda.*—Athyris ambigua, Chonetes Hardrensis, Crania quadrata, Discina nitida, Lingula mytiloides, L. squamiformis, Orthis Michelini, Productus aculeatus, P. cora, P. costatus,

* Trans. Geol. Soc. Glasgow, vol. ii., part 1, p. 52.

† See p. 195.

‡ *Ibid*, vol. i., part 1, p. 53.

P. Martini, P. reticulatus, P. Youngianus, Rhynchonella pleurodon, Spirifera bisulcata, S. glabra, Strophomena var. analoga, Terebratula hastata.

*Lamellibranchs.*—Aviculo-pecten arenosus, A. fimbriatus, A. granosus, Pecten Sowerbii, Pteronites fluctuosus, Arca reticulata, Cardiomorpha oblonga, Cypricardia cylindrica, Leda attenuata, Modiola elongata, Myalina crassa, Nucula lineata.

*Gasteropods.*—Dentalium priscum, Euomphalus acutus, E. pentangulatus, Macrocheilus acutus, Murchisonia striatulæ, Pleurotomaria monilifera, P. conica.

*Pteropods.*—Bellerophon decussatus, B. Oldhamii.

*Cephalopods.*—Cyrtoceras unguis, Goniatites excavatus, G. Gilbertsoni, G. striatus, Nautilus biangulatus, N. subsulcatus, Orthoceras attenuatum, O. cinctum, O. undatum.

*Fishes.*—Amblypterus punctatus, Cladodus mirabilis, Cochliodus magnus, Helodus lævissimus, Megalichthys Hibberti, Palæoniscus Robsoni, Petalodus Hastingsiæ, Pæcilodus obliquus, Rhizodus Hibberti, Rhizodopsis minor.

## CHAPTER XXIV.

### COAL-FIELDS OF MID-LOTHIAN AND HADDINGTON.

These coal-fields consist of a double trough, the deeper of which lies in Edinburghshire on the west, and the shallower in Haddington on the east.

The western boundary is the Pentland Hills, along the base of which the Carboniferous strata plunge rapidly towards the centre of the trough. The axis of the trough lies nearly north and south, passing through Dalkeith. On approaching the Carberry ridge, the beds again rise and crop out, and the Roman Camp limestone forms a ridge dividing the two troughs. On the east of the Carberry ridge the lower coal-seams again roll in, and form the wide trough of Haddington, where the beds lie in a position not much removed from the horizontal.

To the north of these troughs, the coal-seams strike out to sea, are overspread by the Frith of

Forth, and reappear on the opposite coast of Fifeshire.

The thickness of the Coal-series in the Lothians is, according to Mr. Milne, upwards of 1,000 fathoms, consisting of sandstone 286 fathoms, of shales 188, of limestone 27, of clay 12, and of coal 21 fathoms. There are from 50 to 60 coal-seams of greater thickness than one foot, the thickest being 13 feet.

My colleague, Mr. Howell, arranges the Coal-series into three groups corresponding to that given above of the Coal-formation of Scotland generally. The total thickness is 3,150 feet, not including the Calciferous Sandstone series, which contains very little workable coal,* but is characterised by the presence of great beds and sheets of contemporaneous and intrusive trap-rocks, which are ably described by Messrs. Howell and Geikie in "The Geology of Edinburgh." (Mem. Geol. Surv.) The Coal-measures (No. 1) are confined exclusively to the western trough, and do not occur in Haddington. The faults generally range from east to west, transversely to the axis of the troughs.

The workable coal-area as measured from the

* The Houston coal—about two feet thick—of Linlithgowshire, is one of the few workable seams.

maps of the Geological Survey is 64 square miles.

*Coal-seams of Mid-Lothian.*

(Taken from the centre of the trough near Dalkeith.)

*Coal-Measures*, 1,220 *feet.*

| | Ft. | In. |
|---|---|---|
| *Sandstone and Shale* | 346 | 0 |
| Clay Knowes Coal | 3 | 6 |
| Splint Coal | 3 | 10 |
| Beefie Coal | 3 | 6 |
| Jewell Coal | 4 | 0 |
| Coal | 2 | 8 |
| Cowpits Little Splint | 2 | 2 |
| Cowpits Five-feet | 5 | 6 |
| Glass Coal | 2 | 0 |
| Barrs Coal | 4 | 0 |
| Cowpits Three-feet | 3 | 0 |
| ,, Six-feet | 4 | 6 |
| *Millstone Grit* | 340 | 0 |

*Carboniferous Limestone Coal-seams*, 1,590 *feet.*

| | | |
|---|---|---|
| Cowden Deception Coal | 2 | 2 |
| ,, Cryne | 2 | 6 |
| ,, Mavis | 2 | 8 |
| ,, Great Seam | 8 | 0 |
| ,, Diamond | 2 | 7 |
| ,, Lilla Willie | 5 | 1 |
| ,, Blackbird Seam | 3 | 11 |
| ,, Coronation | 3 | 10 |
| ,, Hard Splint | 3 | 3 |
| ,, Smithy Coal | 2 | 9 |
| ,, Bryant's Splint | 5 | 8 |
| ,, Aleck's Coal | 2 | 7 |
| ,, Coal | 2 | 6 |
| ,, Little Splint | 2 | 1 |

| | Ft. | In. |
|---|---|---|
| Cowden Coal . . . . . | 2 | 1 |
| ,, Parrot Seam . . . . . | 3 | 0 |
| ,, Chalkieside Lime Coal . . | 3 | 0 |

The above include only coals of 2 feet and upward. There are altogether no less than 46 seams with an aggregate thickness of 122 feet of coal. There are also 9 seams of ironstone of 2 inches and upward.

The principal coals are "the Great Seam," which has been traced from its outcrop at Gilmerton, under the valley of the Esk, over the Carberry ridge, to the valley of the Tyne, a distance of 12 miles. It extends from the flanks of the Lammermuir range northward to the sea. Below this, at a depth of 250 fathoms, is the "North Greens" coal, which yields the "Parrot-coal," valuable for its gas.

*The East Lothian Coal-field.*—The area of this coal-field is about 30 square miles, and the strata of which it is composed belong exclusively to the Carboniferous Limestone-series, the seams of coal and ironstone which are wrought in it being the equivalents of the "edge coals" of Mid-Lothian, some of which can be individually identified. The following is the series as given by Mr. Howell:*—

* Geology of the East Lothian Coal-field, by Messrs. Howell, Geikie, and Young, Mem. Geol. Survey, 1866.

*Coal-series of East Lothian.*

| | Ft. | In. |
|---|---|---|
| *Coal "Great Seam"* | 7 | 0 |
| Strata | 50 | 0 |
| *Splint Coal* | 4 | 0 |
| Strata — from 7-ft. to | 18 | 0 |
| *Parrot Coal* | 1 | 8 |
| Strata — from 7-ft. to | 34 | 0 |
| *Three-foot Coal* | 2 | 6 |
| Strata | 9 | 0 |
| *Four-foot Coal* — from 3-ft. 8-in. to | 4 | 11 |
| Strata | 118 | 0 |
| *Five-foot Coal* | 4 | 0 |
| Strata, with black-band Ironstone — about | 130 | 0 |
| *Panwood Coal* | 1 | 6 |
| Strata | 72 | 0 |
| *Splint and Rough Coals* (16 feet apart) | 4 | 0 |
| Strata | 100 | 0 |
| *Haughielin Coals* (sometimes "Parrot" Coal) — 16-in. to | 1 | 6 |
| Strata | 35 | 0 |

*Lower Limestone Group.*—The basis of the above series is the Lower Limestone group, consisting of three principal beds of limestone, separated by intervening strata of sandstone and shale, with one seam of coal of about one foot in thickness. These three limestones form a broad zone encircling the East Lothian coal-field on the east and south-east, and dividing it from the Mid-Lothian coal-trough on the west.

Underneath these occur the Calciferous Sandstones, with beds of volcanic ashes and contem-

poraneous igneous rocks, and also including the celebrated Burdie House, or Queensferry Limestone, remarkable for the varied character of its fauna, which includes numerous genera of fish, small crustacea, and plants.*

* For a list of fossils of the Burdie House Limestone, see "Geology of Edinburgh," Mem. Geol. Survey, p. 37.

# CHAPTER XXV.

## FIFESHIRE COAL-FIELD.

This coal-field is of considerable extent and of great mineral productiveness, but is over a large part of its eastern area much dislocated by faults, and destroyed by the intrusion of igneous rocks. Nearly the whole of the coal-seams enter the sea between Kirkcaldy and East Wemyss, and present the following section as given by Mr. Landale in his valuable memoir:*—

*Coal-seams of Fifeshire.*

| | Ft. | In. | | Ft. | In. |
|---|---|---|---|---|---|
| 1. Parrot Seam ... ... | 2 | 6 | 17. Boreland Coal ... ... | 3 | 6 |
| 2. Pilkembare Coal ... | 2 | 0 | 18. Sand Well „ ... ... | 3 | 0 |
| 3. Wall ... ... ... | 3 | 0 | 19. Dysart Main Seam ... | 21 | 0 |
| 4. Barn Craig ... ... | 5 | 6 | 20. Dysart Lower Seam ... | 7 | 0 |
| 5. Upper Coxtool Coal ... | 3 | 0 | 21. Dunnikier Five-feet Coal ... ... ... | 2 | 6 |
| 6. Lower „ „ ... | 3 | 6 | 22. Four-feet Coal ... ... | 4 | 0 |
| 7. Den Coal ... ... | 2 | 2 | 23. Three-feet „ ... ... | 3 | 0 |
| 8. Main or Chemis... ... | 9 | 0 | 24. Black and Parrot Coal ... | 5 | 3 |
| 9. Bush Coal ... ... | 3 | 6 | 25. Upper Smithy „ | 3 | 0 |
| 10. Parrot „ ... ... | 2 | 3 | 26. Lower „ „ | 1 | 6 |
| 11. Wood „ ... ... | 3 | 0 | 27. Parrot Seam Coal ... | 2 | 0 |
| 12. Earl's Parrot Coal ... | 2 | 0 | 28. Coal Seam ... ... | 2 | 4 |
| 13. Bowhouse „ ... | 6 | 6 | 29. Invertiel Coal ... ... | 5 | 6 |
| 14. Brankston „ ... | 4 | 0 | | | |
| 15. Coal More „ ... | 2 | 6 | Total thickness of Coal | 120 | 6 |
| 16. Coal Mangey „ ... | 2 | 6 | | | |

* Transactions of the Highland Society, vol. xii.

The Invertiel coal overlies a thick and very constant bed of limestone which forms the physical base of the coal-producing strata. Underneath this limestone is a thick series of Lower Carboniferous rocks, the coal-seams of which are not of economical value, but which give evidence of volcanic activity throughout a period ranging from the Calciferous Sandstone up through the Carboniferous Limestone. The necks of many of the old submarine volcanoes which poured forth molten lava over the sea-bed, or vomited forth showers of ashes, stones, and blocks, can even now be identified, and appear as isolated bosses of basalt, tuff, and agglomerate; as some of these invade the Coal-measures of Fifeshire, it is not improbable they are referable to the Permian period.*

This coal-field contains excellent gas-coal, steam, and iron-smelting coal, smithy coal, and some anthracite.

### *Clackmannan Coal-field.*

This coal-field is separated from that of Fife by the uprising of the Lower Carboniferous rocks near Dunfermline. It stretches along the

* Mr. A. Geikie, Address Brit. Assoc., Dundee, 1867.

northern and eastern banks of the river Forth, by which it is separated from the great central coal-field of the Clyde Basin.

According to Mr. Geddes, the southern portion of this coal-field is much exhausted; the middle area is extensively worked, the northern portion is comparatively entire north of the river Devon; these three divisions are separated by considerable faults. The following is the series of the coals in descending order at Old Sauchie:*

| | Ft. | In. | | Ft. | In. |
|---|---|---|---|---|---|
| 1. Coal | 2 | 6 | 7. Mosie Coal | 2 | 0 |
| 2. Three-feet Coal | 3 | 0 | 8. Lower five-feet Coal | 5 | 0 |
| 3. Upper five-feet | 5 | 0 | 9. Splint Coal | 2 | 9 |
| 4. Four-feet Coal | 4 | 0 | 10. Coalsnaughton | 4 | 6 |
| 5. Nine-feet Coal | 9 | 0 | | | |
| 6. M'Nish Coal | 2 | 9 | Thickness of Coal | 40 | 6 |

* Mr. Geddes, Coal-Commission Report, vol. i., p. 76.

# CHAPTER XXVI.

## AYRSHIRE COAL-FIELD.

The Ayrshire coal-field stretches along the coast from Ardrossan to the mouth of the river Doon, and extends inwards to the base of the hills of trappean and Devonian rocks, by which it is separated from the coal-field of the Clyde Basin. It is a rich and productive district, large quantities of coal being shipped from Ayr, Troon, Irvine, and Ardrossan.

The Carboniferous rocks rest unconformably on the older formations, while they are in turn overlaid unconformably by rocks of Permian age; in consequence of this, the true base and upper limit of the series can nowhere be seen.* The following is the general succession of the beds in descending order:—

* "Ayrshire (Southern District)," Mem. Geol. Survey of Scotland (1869), p. 15.

| Groups of Strata. | Localities. |
|---|---|
| *Coal-measures.*—(*b*) Red sandstones, fireclays, and marls, with Carboniferous plants, and a seam of limestone, with *Spirorbis*. No workable coals. (*a*) A thick series of white and grey sandstones, dark shales, fireclays, ironstones, and coal-seams. | Monkton, Aunbank, Coylton Water below Coylton, Ravines of the Ayr at Catrine, Coal-fields of Ayr, Coylton, Dalmellington, Cumnock, Auchenleck, Lugar, and Sorn. |
| *Carboniferous Limestone-series.*—Sandstones, shales, and limestones, with seams of coal and ironstone.* | Girvan Coal-field, Craigs of Kyle, Kiers, Sorn, etc. |
| *Calciferous Sandstone-series.*—Upper beds of white sandstones, cement stones and marls, below which are red sandstones, marls, and cornstones. | Dailly, the coast from the mouth of the Doon to Brackenbrae. |

The following is the order of succession and average thickness of the principal coals in the Ayr district :—

* In the south of Ayrshire this series is but poorly represented, but northward it thickens out, and produces several seams of workable coal. The Dalry black-band ironstone belongs to this part of the series.—Mr. J. Geikie, "Carboniferous Formation of Scotland," p. 12.

*Red Sandstone-series.*

| | | Ft. | In. |
|---|---|---|---|
| Light sandstones, shales, fireclays, and thin coal | 60-ft. to | 70 | 0 |
| *Ell Coal* | | 3 | 4 |
| Strata | | 78 | 0 |
| *Crawfordston Coal* | | 8 | 0 |
| Strata | 30-ft. to | 60 | 0 |
| *Ayr Soft*, or *Five-feet Coal* | 5-ft. to | 7 | 0 |
| Strata | | 150 | 0 |
| *Ayr Hard*, or *Splint Coal* | | 4 | 0 |
| Strata | | 300 | 0 |
| *Black-band Ironstone* | | 1 | 0 |
| Strata | | 120 | 0 |
| Uppermost Limestone. | | | |

In the Dalmellington coal-field we find the following series :—

| | | |
|---|---|---|
| Craigmack Black-band Ironstone | 0 | 10 |
| Strata | 282 | 0 |
| *Lillyhole Coal* | 5 | 6 |
| Strata | 350 | 0 |
| *Chalmerston Coal* | 4 | 0 |
| Strata | 60 | 0 |
| *Minnevey Coal* | 3 | 6 |
| Strata* | 654 | 0 |
| *Burnfoot Black-band* | 2 | 3 |

*Igneous Rocks.*—Besides the great beds of contemporaneous felstones, porphyrites, and melaphyres with volcanic ashes of the Lower Carbonifer-

* In these beds, Mr. Geddes mentions the "Sloanston," "Camlarg," and "New" Coals, all of which are three feet and upwards in thickness.

ous period, which rise into the Dunlop Hills, and separate the Ayrshire coal-field from that of the Clyde-Basin, there are frequent intrusive sheets and vertical dykes of dolerite and basalt, which have destroyed much of the valuable minerals, and greatly interfere with the successful prosecution of mining operations. The Permian rocks which overlie the Coal-measures near the centre of the coal-field, are also underlaid by beds of porphyrite, melaphyre, and tuffs, which are referable, according to the views of the Government Surveyors, to the Permian period itself.

# CHAPTER XXVII.

## OTHER COAL-FIELDS OF SCOTLAND.

### *Lesmahago Coal-Basin.*

To the south of the general tract of the Lanarkshire coal-field lies the detached basin of Lesmahago and Douglas, consisting of Carboniferous rocks, resting unconformably upon, and nearly surrounded by beds of the Lower Old Red Sandstone. The strata themselves belong to the Carboniferous Limestone-series, as shown by the geological map of Sir R. Murchison and Prof. Geikie, and are distributed along the valleys of the Nethan and the Ayre. The celebrated gas coal is considered to be on the same geological horizon as that of the vicinity of Glasgow, and which is known to lie well down in the Limestone-series. The following are sections of the coal-series curtailed from those of Mr. Slimon:*—

* From Appendix to Sir R. Murchison's paper on the "Lesmahago Silurians" in Journ. Geol. Soc., vol. xii., p. 25.

*Section at Coal Burn.*

| | Ft. | In. |
|---|---|---|
| Shale and Limestone ... | 10 | 0 |
| Sandstone and Shale ... | 27 | 0 |
| *Gas and Dross Coal* ... | 1 | 0 |
| Sandstones and Shales ... | 25 | 0 |
| *Dross Coal* ... ... ... | 3 | 0 |
| Fire-clay ... ... ... | 0 | 11 |
| Dross Coal, with 6 inches of Horn Coal ... ... | 3 | 11 |
| Strata ... ... ... | 13 | 0 |
| *Coal* ... ... ... ... | 3 | 0 |
| Fire-clay ... ... ... | 3 | 6 |
| *Coal* ... ... ... ... | 2 | 9 |
| Strata ... ... ... | 12 | 0 |
| *Black-band Ironstone* ... | 0 | 8 |
| Shales with Ironstone ... | 7 | 4 |
| *Smithy Coal*... ... ... | 1 | 6 |
| Fire-clay ... ... ... | 1 | 6 |
| *Coal* ... ... ... ... | 4 | 0 |
| Stone ... ... ... | 0 | 7 |
| *Coal* ... ... ... ... | 4 | 7 |
| Shales, with seams of Ironstone ... ... ... | 81 | 8 |
| *Coal*, with 6 inches of stone | 6 | 0 |
| Strata, with Ironstone ... | 54 | 0 |
| *Coal* (stinking) ... ... | 5 | 0 |
| Sandstones and Shales ... | 34 | 0 |
| Limestone ... ... ... | 1 | 8 |
| Grey Shale ... ... ... | 20 | 0 |
| Ironstone ... ... ... | 0 | 8 |
| Shale and Limestone with *Productus* ... ... | 46 | 0 |
| Sandstone and Limestone resting on upper Old Red Sandstone. | | |

*Section at Auchenheath.*

| | Ft. | In |
|---|---|---|
| Shales and Sandstones. | | |
| Limestone ... ... ... | 1 | 6 |
| Shale ... ... ... | 10 | 0 |
| Strata, with four beds of Limestone ... ... | 225 | 3 |
| *Smithy Coal*... ... ... | 1 | 4 |
| Shelly Clay ... ... ... | 1 | 6 |
| *Coal* ... ... ... ... | 4 | 0 |
| Strata ... ... ... | 15 | 0 |
| *Gas Coal* ... ... ... | 0 | 10 |
| *Black-band Ironstone* ... | 0 | 5 |
| Shales with Ironstone balls | 3 | 8 |
| *Coal* ... ... ... ... | 0 | 8 |
| Fire-clay ... ... ... | 1 | 6 |
| *Dross Coal* ... ... ... | 3 | 0 |
| Shales and Sandstones ... | 54 | 6 |
| *Coal* ... ... ... ... | 0 | 10 |
| Shale ... ... ... | 5 | 0 |
| *Gas Coal* ... ... ... | 1 | 9 |
| Ironstone ... ... ... | 0 | 4 |
| Fire-clay ... ... ... | 1 | 3 |
| *Coal* ... ... ... ... | 0 | 6 |
| Sandstone resting upon Limestone. | | |

These beds are supposed to rest upon Old Red Sandstone.

This coal-tract is about $7\frac{1}{2}$ miles from E. to W. and from N. to S. Mr. J. Ferguson states that three-fourths of its area is stored with coal of second class quality. There is at Ponfrich an aggregate thickness of 53 feet within a vertical depth of 200 fathoms.

The geological features of this district are also described by Mr. Geikie, "On the Old Red Sandstone of the South of Scotland," *ibid*, vol. xvi., p. 314.

*Argyleshire.*—The parish of Campbelton contains a little coal-field, situated amongst metamorphic schists. For nearly a century coal has been worked on a limited scale, and, according to Mr. Geddes, three seams are known at Drumlemble, viz.: 3, cannel or gas coal, from 18 to 30 inches in thickness; 2, the main coal, 4 to 6 feet; 1, underfoot coal, from 2 to 3 feet. Other seams may possibly exist in that district.*

### CANOBIE COAL-FIELD, DUMFRIESSHIRE.

Two small, but valuable, tracts of Carboniferous rocks rise to the surface along the southern borders of Dumfriesshire north of Gretna, those of Canobie and Sanquhar. The beds repose on Carboniferous Limestone strata, and are overlaid by others of Permian age, and along the north-west and south-east the Canobie tract is bounded by faults.† The general dip of the strata is southwards, and it seems not improbable that these coal-strata are but the northern outcroppings of a more extensive tract, which lies concealed

* Coal-Commission Report, vol. i., p. 77.

† Mr. A. Geikie, quoted by Professor Ramsay, Rep. Coal-Commission, vol. i., p. 140.

beneath newer formations towards the head of the Solway Firth.*

The following are the coal-seams of the Canobie and Sanquhar districts:†—

| *Canobie.* | Ft. | In. | *Sanquhar.* | Ft. | In. |
|---|---|---|---|---|---|
| Three-feet Coal | 3 | 4 | Upper or Creepy Coal | 2 | 8 |
| Six-feet ,, | 6 | 0 | Main Coal | 3 | 6 |
| Nine-feet ,, | 9 | 0 | Wee ,, | 1 | 10 |
| Steam Coal | 3 | 0 | Dauch ,, | 3 | 8 |
| Five-feet ,, | 5 | 0 | Drumbowie Coal | 4 | 9 |
| Blast-top ,, | 4 | 6 | New ,, | 1 | 0 |
| Seven-feet ,, | 6 | 0 | | | |
| | 36 | 10 | | 18 | 3 |

Mr. Geddes states that the 3-feet and 6-feet seams of Canobie are already exhausted; but considers that the Byreburn coals may be expected to underlie those of Canobie, in which case 14 millions of tons would be added to the known supply.‡

### BRORA COAL-FIELD, SUTHERLANDSHIRE.

A small coal-field occurs at Brora, near the shores of Dornoch Firth. It has been shown by Sir R. Murchison to be of the age of the Lower

* On this subject, see Prof. Ramsay's observations, Rep. Coal-Commission, vol. i.

† As stated by Mr. Geddes, *ibid*, p. 75.

‡ *Ibid*, p. 75.

Oolite, and in all probability contemporaneous with the carbonaceous strata of Whitby in Yorkshire.* The following is part of the section of one of the pits from which the coal was extracted :—

| | Ft. | In. |
|---|---|---|
| 13. Dark argillaceous schistus with soft partings and a few shells . . | 36 | 6 |
| 14. Very large-grained sandstone, with shells and wood (coal-roof) . . | 5 | 0 |
| 15. Fine cubical coal, burning to white ash | 3 | 8 |
| 16. Bituminous shale, containing natural oil, burns, but does not consume . . | 2 | 0 |
| 17. Slate-coal with pyrites . . . | 1 | 4 |
| 18. Fire-clay and argillaceous schistus . | 90 | 0 |

The coal-bed appears to be at or near the base of the Great Oolite, as in Yorkshire, but the Inferior Oolite would appear to be absent, if the thick bed of shale belongs (as is probable) to the Upper Lias. The shells enumerated by Sir R. Murchison from the beds above the coal, are typical of the formations from the Great Oolite to the Calcareous Grit.

The first pit was opened in 1598 by the Countess of Sutherland. That formerly in use was sunk in 1814, and up to the year 1827 seventy millions of tons of coal had been raised. The works were discontinued in 1832.

* Trans. Geol. Soc. Lond., vol. ii., 2nd Series, p. 393.

*Skye.*—In the Isle Skye is a small coal-field, probably of Lower Oolitic age, which contains a bed of coal nearly 5 feet in thickness.

### *Resources of the Coal-fields of Scotland.*

The estimates of the available quantity of coal in the coal-fields of Scotland have been drawn up for the Royal Coal-Commission, by Mr. John Geddes, one of the commissioners ; and to no one could the task have been more worthily entrusted, as Mr. Geddes's long experience as a mineral engineer had given him opportunities of becoming acquainted with the details of the Scottish coal-fields, which were of the highest value to this inquiry. The estimate produced by Mr. Geddes of the coal-resources is, I find, much below that arrived at by myself in 1858 ; but I have no hesitation in substituting it for my own, which had little pretensions to accuracy, as the means at my disposal for obtaining the details necessary for such a calculation were very imperfect.

Distributing the coal-fields into counties, Mr. Geddes gives the following quantities of available coal for each, the whole of which is included within a vertical limit of 3,000 feet :—

| County. | Available coal in tons. |
|---|---|
| 1. Edinburgh | 2,153,703,360 |
| 2. Lanark | 2,044,090,216 |
| 3. Fife | 1,098,402,895 |
| 4. Ayr | 1,785,397,089 |
| 5. East Lothian | 86,849,880 |
| 6. Firth of Forth | 1,800,000,000 |
| 7. Dumfries | 358,173,995 |
| 8. West Lothian | 127,621,800 |
| 9. Stirling | 106,475,436 |
| 10. Clackmannan | 87,563,494 |
| 11. Perth | 109,895,040 |
| 12. Dumbarton | 48,618,320 |
| 13. Renfrew | 25,881,285 |
| 14. Argyle | 7,223,120 |
| 15. Sutherland | 3,500,000 |
| 16. Roxburgh | 70,000 |
| Total | 9,843,465,930 |

The produce of the Scottish coal-fields is rapidly increasing. In 1859 it was 10,300,000 tons; but in 1870 it had risen to 21,273,868 tons from 411 collieries.* In the same year 1,150,000 tons of pig iron were smelted in 132 blast furnaces from clay-band and black-band ironstones.

* Returns made by the Inspectors of Collieries, Messrs. W. Alexander and Ralph Moore, and published in the "Mineral Statistics," 1870.

## CHAPTER XXVIII.

### CARBONIFEROUS ROCKS OF IRELAND.

A LARGE portion of the centre and south-west of Ireland is occupied by Carboniferous Limestone, upon which at intervals repose higher strata productive of coal, and forming isolated coal-fields. The existence of these outliers, as well as analogy with British geology, leads to the conclusion that, at the close of the Carboniferous Period, large tracts of coal-bearing strata existed over Ireland which have since, to a great extent, been removed by denudation.

*Anthraxiferous and Bituminous Districts.*—If we group the coal-fields south of a central line drawn from Galway Bay to Dublin Bay, into one series, and those north of this line into another, we have the following specialities in reference to each.

1. *The Southern Group.*—All the coal in the district of this group is anthracite, and this state-

ment is true with reference to the coal of Clare, Limerick, Cork, Tipperary, Queen's County, Kilkenny, and Carlow.

2. *The Northern Group.*—On the other hand, the coal in this district is bituminous; and this statement holds good with respect to the Arigna (Connaught), Tyrone, and Ballycastle coal-fields, while the general succession of the strata above the Carboniferous Limestone bears a closer analogy to that of England than in the case of the southern coal-districts.

### SOUTHERN DISTRICT.

#### *General Succession of the Beds.*

The general succession of the strata is similar over this whole region, which has been surveyed and described by the Government Surveyors. * Upon a general basis of Carboniferous Limestone, there reposes a series of dark fossiliferous shales, which are overlaid by flagstones, upon which rest shales and sandstones with beds of coal. The shales and flagstones which rest upon the Lime-

* In several "Explanations" to accompany the Geological Survey Maps by the late Messrs. Jukes, Foote, and Messrs. Kinahan and O'Kelly; with Palæontological Notes by Mr. W. H. Baily.

stone, I regard as the representatives of the Yoredale beds and Millstone Grit of England; and the overlying Coal-measures as the equivalents of the Lower, and a part of the Middle, Coal-measures of the same country.* This series is illustrated by the section (Fig. 19) of the Castlecomer coal-field; and is more fully described in the following table of strata taken in the S.W. and S.E. of Ireland, in descending order:—

| Name of Formation. | Nature of Strata. | |
|---|---|---|
| | Co. Kilkenny, etc. | Co. Clare, etc. |
| *Coal-measures with representatives of the "Gannister Beds" of England at the base.* | Sandstones, shales, clays, with five workable beds of coal with *Bellinurus Regina* (Baily), *B. arcuatus* (Baily), *Goniatites*, *Anthracosia* (Unio or Myacites), *Myalina*, and plants, *Sigillaria*, *Lepidodendron*, *Calamites*, *Pecopteris*, etc. | Grits, flags (Money Point), shales, and thin coal-seams, 3 in number, with similar fossils to those of Kilkenny. |

* That this view is in accordance with that of the late Professor Jukes, may be inferred from a note at the foot of p. 11 of "Explanation" to Sheet 137, where he says, "Doubtless the whole of the Coal-measure series of Central Ireland is contemporaneous with the lower part only of that of Central England, including the Millstone Grit in that lower part."

| Name of Formation. | Nature of Strata. | |
|---|---|---|
| | Co. Kilkenny, etc. | Co. Clare, etc. |
| *Millstone Grit* . | *b. Flagstone series.* Grits and excellent flagstones with shales, about 650 feet, passing downwards into sandy shales, and annelid tracts. | *b.* Flagstones chiefly, worked at Ballynacally; Annelid tracts not common. |
| *Yoredale Beds* . | *a. Black Shale series.* Sandy shales passing downwards into dark laminated shales, full of marine fossils, *Goniatites*, *Bellerophon*, *Euomphelus*, *Aviculo-pecten*, etc. | *a. Shale series.* — Black, grey, and olive shales, sometimes arenaceous, spheroidal — with numerous fossils— *Goniatites crenistria*, *Orthoceras*, *Posidonomya vetusta*, *Aviculopecten papyraceus*, *Loxonema Galvani* (Baily), etc. |
| *Carboniferous Limestone* . | *Upper Limestone*, forming the basis of the series. | *Upper Limestone.* |

## *Munster.*

*Clare, Limerick, and Cork.*—This district is very extensive, stretching from over a considerable tract both to the north and south of the estuary of the Shannon, but is only locally

productive of coal. Mr. Weaver, who described this district many years since, truly states that the seams are few in number and importance; that they are frequently thrown into high inclinations, and while in some places compressed to a few inches, in others they are swollen out to several feet.* The most important district is situated between the River Blackwater and Kanturk, where coal has been extensively worked.

### *Queen's County, Kilkenny, and Tipperary.*

This coal-field is the most important economically in the South of Ireland, and may be designated "The Leinster Coal-field," though a considerable spur strikes southward into Tipperary. The northern portion has a generally basin-like structure, and occupies a table-land overlooking the plain of Carboniferous Limestone by which it is encircled, and upon which it rests. This will be apparent from the following section, reduced from that of the Geological Survey: †—

* Trans. Geol. Soc. Lond., vol. v. See also "Explanation" to Sheet 142, by Messrs. Kinahan and Foote, Mem. Geol. Survey.

† "Explanation" to Sheet 137, by Messrs. Jukes and Kinahan.

Fig. 19.—SECTION ACROSS THE EASTERN PORTION OF THE LEINSTER COAL-FIELD BY BILBOA COLLIERY.




1. Carboniferous Limestone.
2. Black Shale Series.
3. Flagstone Series.
4. Coal Measures.

The following is the general series of coals in the Castlecomer coal-basin, by Messrs. Jukes and Kinahan :—

| | | Ft. | In. |
|---|---|---|---|
| | Uppermost beds, about | 12 | 0 |
| 6. | *Peacock Coal* | 1 | 10 |
| | Strata | 45 | 0 |
| 5. | *Stoney Coal* | 3 | 0 |
| | Strata | 21 | 0 |
| 4. | *Double Seam* | 5 | 0 |
| | Strata and shales with *Myacites* (Anthracosia ?) | 120 | 0 |
| 3. | *Three-feet* or *Old Colliery Coal* | 3 | 0 |
| | Strata | 180 | 0 |
| 2. | *Foot Coal* | 1 | 6 |
| | Strata | 300 | 0 |
| 1. | *Gale Hill Coal* | 0 | 6 |
| | Flag Series, about | 650 | 0 |
| | Black Shale Series | 500 | 0 |
| | Upper Carboniferous Limestone. | | |

Another seam of good quality, about twenty inches in average thickness, and known as the *Skehana* coal, is now considered to lie between

the "Foot" coal and "Gale Hill" coal of the above series.

Throughout the whole of these measures shells have been found; and the black shales at the base are stored with crushed specimens of the genera *Aviculo-pecten*, *Euomphalus*, *Bellerophon*, *Goniatites*, and the remarkable Crustaceans similar to those from Coalbrook Dale in Shropshire, and described by Mr. Baily under the names of *Bellinurus Regina* and *B. arcuata*.*

Fossil-plants of the usual Coal-measure genera are abundant, such as *Calamites*, *Lepidodendron*, *Sigillaria*, with its rhizome, *Stigmaria ficoides*. The coal-beds also invariably repose on floors of underclay.

* Figures of these fossils are given in the above memoir to Sheet 137.

# CHAPTER XXIX.

## NORTHERN GROUP OF COAL-FIELDS.

*Leitrim Coal-fields* (*Connaught*).—These coal-fields form several detached table-lands, or eminences, on both sides of Lough Allen, rising into elevations from 1,000 to 1,377 feet above the surrounding districts, formed for the most part of Carboniferous Limestone. Those to the west of the Lough are the most important, and form two small isolated basins to the north and south of the River Arigna ; owing to which they are sometimes called the "Arigna Coal-fields." Of this district excellent descriptions have been drawn up by Sir R. Griffith,* Sir R. Kane,† and the late Mr. Du Noyer,‡ which, in the absence of

* Report on the Connaught Coal-fields (Arigna District), presented to the Royal Dublin Society, 1818.

† "Industrial Resources of Ireland," 2nd edit.

‡ "On the Bituminous Coal of the Arigna District," by G. V. Du Noyer (*Geologist Magazine*, March, 1863), with Map and Sections.

a detailed survey by the Government Surveyors (only recently commenced), enables us to form a sufficiently accurate judgment of its structure and resources. The following section reduced from one by Mr. Du Noyer, gives a good idea of the relations of these coal-tracts, and their dissever-ance by denudation :—

Fig. 20.—SECTION ACROSS THE LEITRIM COAL-FIELDS.

Coal Measures, Millstone Grit, and Limestone Shale, resting on a base of Carboniferous Limestone.

*General Succession of the Beds.*—In this district the Millstone Grit and Yoredale-beds are well developed, and interposed between the Carboniferous Limestone and Coal-measures. The former rises into fine escarpments, which, at the mountain called Cuilceagh on the borders of Fermanagh, reaches an elevation of 2,188 feet, and exhibits a fine mural cliff similar to those of the Millstone Grit of Kinder Scout, in Derbyshire.*

* This district was examined by the Author during a visit to the Earl of Enniskillen, in 1870. In that district a thick series of sandstones intervenes between the limestone and overlying shales.

The Yoredale shales, which underlie the grit, are rich in clay-ironstones, and cement-stones, containing *Goniatites* and other marine shells.

*Upper Carboniferous-series at Kilronan.*

| | | Ft. | In. |
|---|---|---|---|
| *Coal Measures*, 286 to 453 feet. | Sandstones and flags . . . | 110 | 0 |
| | Shale, with numerous bands of clay-ironstone . . . 100 to | 200 | 0 |
| | *Coal.* Third seam . . . . | 0 | 9 |
| | White sandstone . . 24 to | 45 | 0 |
| | Grey soft clay—Coal-roof 10 to | 15 | 0 |
| | *Coal.* Second seam . . 2 6 to | 3 | 4 |
| | Sandstone and shale . . 22 to | 30 | 0 |
| | *Coal.* First seam, mixed with shale 1 to | 3 | 0 |
| | Sandstones and shales . 17 to | 36 | 0 |
| *Millstone Grit*, 60 to 250 ft. | Massive coarse sandstone,—from 60 to | 250 | 0 |
| *Yoredale Beds*, 600 ft. | Black shales and grey flags; nodular layers of ironstone (fossiliferous) 300 to | 600 | 0 |
| *Carboniferous Limestone.* | Upper, middle, and lower limestone. | | |

*Details.*—The coal of this district is bituminous. In the Aghabehy coal-basin, there is but one seam of much value, called the "top seam" (the second in the above list). It has a shale roof and sandstone floor, and averages 18 inches in thickness. The middle coal of the Altagowlan basin has a similar roof and floor, and the same

thickness, and the upper seam is of equal thickness with the lower. The following analysis of the Aghabehy coal has been published by Sir R. Kane : *—

| | |
|---|---|
| Volatile matter | 23·10 |
| Pure Coke | 66·15 |
| Ashes | 10·75 |
| | 100·00 |

*Ironstones.*—The clay-ironstones which occur both amongst the shales of the Coal-measures, and especially amongst those of the Yoredale-beds below, are intrinsically valuable from their quantity and richness in iron. They were formerly smelted at the Arigna iron-works on the shores of Lough Allen, and it is to be hoped will again be turned to account. The following analysis by Sir R. Kane will show their average composition :—

| | |
|---|---|
| Protoxide of iron | 51·36 |
| Lime | 1·59 |
| Magnesia | 1·92 |
| Alumina | 0·98 |
| Insoluble clay | 12·82 |
| Carbonic acid | 31·33 |
| | 100·00 |

Proportion of metallic iron, 40 per cent.

* "Industrial Resources," 2nd edit., p. 23.

### *The Tyrone Coal-field (Ulster).*

This coal-field is unquestionably one of great economic importance, containing as it does large quantities of bituminous coal, placed within easy reach of the manufacturing districts of the North of Ireland. It lies to the north of the town of Dungannon, and in its centre is the village of Coal-Island, where the Ulster Canal places the district in connection with Lough Neagh.

In structure the Coal-island district is a basin, along the western portion of which the coal-seams crop out and have been worked, but which is overlaid and concealed beneath New Red Sandstone and Marl over probably two-thirds of its entire area to the eastward; hitherto the coals have scarcely been disturbed under this large district;* but I have come to the conclusion that it stretches to within a short distance of the shores of Lough Neagh under the newer formations.

From the survey of Sir R. Griffith, it would appear that the Tyrone coal-field is rich in mine-

* Except in two or three cases, coal-mining has been carried on in a very rude and unsystematic manner in this district, which ought to be the great coal-store for the North of Ireland. The Geological Surveyors have recently completed a detailed survey.

rals, though of limited extent. Along the banks of the river Torrent seven workable beds of coal appear, having a combined thickness of 30 feet, and included within 280 yards of strata, which are ultimately covered over by Triassic strata.*

The general succession of the Carboniferous-series is as follows :—

1. Trias ?—Red sandstones and marls, resting unconformably upon the coal-formation.
2. Coal-measures.—Alternating beds of black shale, sandstone, argillaceous ironstone, fire-clay, and coal.
3. Millstone Grit, etc.—Consisting of sandstone, limestone, and shale with thin beds of coal.
4. Carboniferous Limestone.—Massive limestone, passing upwards into a series of alternating beds of sandstone, shale, slaty limestone with coal.
5. Old Red Sandstone.—Red sandstone, etc.

The Annahone District is much smaller. It is one mile long, and half a mile broad. It may, therefore, contain 320 acres. Sir R. Griffith states, however, that it is probable the district may extend a considerable distance farther to the south and east, and that coal may be wrought from beneath the New Red Sandstone. The coal-field is, moreover, covered to a considerable depth with drift deposits, which render the strata difficult of access.

* Geological and Mining Surveys of Tyrone and Antrim. Dublin, 1829.

The following is some account of the coal-seams at Coal Island in descending order:—

| | Yds. | Ft. | In. |
|---|---|---|---|
| *Upper Coal* (impure) | 0 | 2 | 2 |
| Strata | 12 | 1 | 0 |
| *Annagher Coal* (soft quality) | 0 | 9 | 0 |
| Strata | 18 | 1 | 0 |
| *Bone Coal* | 0 | 3 | 0 |
| Strata | 13 | 0 | 0 |
| *Shining Seam* | 0 | 2 | 10 |
| Strata | 26 | 0 | 0 |
| *Brackaveel Coal* (good quality) | 0 | 4 | 6 |
| Strata | 28 | 0 | 0 |
| *Baltiboy Coal* (sulphureous) | 0 | 3 | 0 |
| Strata | 24 | 0 | 0 |
| *Gortnaskea Coal* { Cannel, 2 feet / Coal, 4 ,, } | 0 | 6 | 0 |
| Strata (about) | 75 | 0 | 0 |
| *Derry Coal* (good quality) | 0 | 4 | 6 |

Below these there are two or three other seams. Some of the coals are of good quality, and have not, as yet, been worked to any great depth, a fact which is scarcely creditable to the enterprising character of the North of Ireland.

### *Antrim Coal-field.*

The Antrim coal-field, in point of geological interest, is unsurpassed by any other district in Ireland. It extends along the coasts of Ballycastle Bay on the north, and Murloch Bay on the south, separated from each other by the magnificent mural cliffs of Benmore or Fair

Head, formed of columnar dolerite, which rise boldly from the sea to a height of 636 feet. The length of the coal-field is four miles, and the average breadth one mile and a half; coal has been wrought here from an ancient period (see p. 34).

The geological structure of this district has been investigated by several observers, including Dr. Berger,* Dr. Bryce,† and Sir R. Griffith, who, in 1829, drew up an able report, illustrated by drawings, for the Royal Dublin Society.‡ The most recent treatise is one by myself, in which the question of the geological age of the coal-bearing rocks is discussed;§ a question to which I shall presently return.

*Ballycastle Carboniferous-series.*—This series may be arranged into the following divisions:—

| | |
|---|---|
| (3) *Upper Beds.* About 240 feet in thickness. | Reddish and grey sandstones, sometimes coarse-grained and conglomeratic; shales with seams of coal, clay-band, and black-band ironstone; fossils, *Lingula squamiformis; Sagenaria* (*Knorria*) *imbricata, Sigillaria, Lepidodendron, Stigmaria,* etc. |

* "On the Geological Features of the Northern Counties of Ireland," Trans. Geol. Soc. Lond., 1st Series, vol. iii.

† "On the Geological Structure of the N.E. part of the County Antrim," *Ibid*, 2nd Series, vol. v.

‡ "Geol. and Mining Survey of the Coal-districts of Tyrone and Antrim." Dublin, 1829.

§ "On the Geological Age of the Ballycastle Coal-field," etc., with Palæontological Notes by Mr. W. H. Baily, F.G.S., Journ. Geol. Soc. of Ireland, vol. ii., part 3, New Series, 1871.

| | |
|---|---|
| (2) *Middle Beds.* 55 feet. | Two beds of compact argillaceous limestone, 9 feet in thickness, fossiliferous, and imbedded in calcareous shales with numerous fossils. Fish, *Orthoceras Steinhauerii*, *Bellerophon Urii*, *Murchisonia angulata*, *Leda attenuata*, *Axinus deltoides*, *Rhynconella pleurodon*, *Productus giganteus*, *Fenestella antiqua*, *Archæocidaris Urii*, etc. |
| (1) *Lower Beds.* Thickness considerable but unknown. | Red and yellow sandstones, sometimes coarse, with beds of shale, and a bed of black-band ironstone; the base of the series being the conglomerate of Murloch Bay. |

The entire thickness of the series is unknown, but probably exceeds 1,200 feet. The base is a quartzose conglomerate resting upon contorted mica-schist, with veins of quartz, as seen at the south end of Murloch Bay.*

*Coal-series.* — The coal-series of Ballycastle Bay, as ascertained at the mines now at work, is as follows:—

| | Ft. | In. |
|---|---|---|
| *Top*, or *First Coal* (splint seam) . . | 3 | 0 |
| Sandstones and shales . . . . | 30 | 0 |
| *Second Coal* (Hawksnest seam) . . | 3 | 0 |
| Strata, with black-band ironstone . . | 240 | 0 |
| *Third Coal* (main seam) . . . . | 4 | 0 |
| Strata, with black-band ironstone below the main coal, in some places . . . | 60 | 0 |

* Furnished to the Author by Mr. Gray, the mine manager, Ballycastle Bay.

| | Ft. | In. |
|---|---|---|
| Limestone (same as that in section above) | 8 | 0 |
| Strata (shales and sandstones) | 240 | 0 |
| Lower black-band ironstone (by boring) | 1 | 0 |
| Total | 589 | 0 |

In Murloch Bay the section is different, but the beds of coal are considered to represent those in Ballycastle Bay. Here they are capped by columnar basalt, and a dyke of this rock intrudes itself amongst the strata, changing some of the coals into anthracite. Other basalt or dolerite dykes occur traversing the strata in Colliery and Ballycastle Bays; and an enormous mass of this rock forms the limit in a northerly direction of mining operations. The strata are also traversed by several faults which displace the beds of coal.

The following is the section visible on the northern side of Murlough Bay from the top of the cliff downwards, as given by Sir R. Griffith :—

*Section in Murlough Bay.*

| | Ft. | In. |
|---|---|---|
| Columnar Greenstone (about) | 100 | 0 |
| Brownish-red Sandstone | 20 | 0 |
| Bituminous Coal | 1 | 0 |
| Red Sandstone | 80 | 0 |
| Black Shale | 6 | 0 |
| *White Mine Coal* (highly bituminous) | 2 | 6 |
| Brownish-red Sandstone | 40 | 0 |
| *Bituminous Coal* | 0 | 6 |

| | Ft. | In. |
|---|---|---|
| Red Sandstone . . . . . | 20 | 0 |
| Black Shale . . . . . | 10 | 0 |
| *Bituminous Coal* (Goodman's vein) . . | 2 | 6 |
| Black Shale . . . . . | 60 | 0 |
| *Uninflammable Carbonaceous Coal* . . | 2 | 6 |
| Black Shale passing into flinty Shale . | 2 | 0 |
| Second columnar Greenstone (basalt) . | 70 | 0 |
| Black Shale . . . . . | 2 | 0 |
| Non-flaming Coal, with thin beds of black Shale . . . . . | 8 | 6 |
| Black Slate (base not visible) . . . | 10 | 0 |
| | 437 | 6 |

*Geological Age of the Antrim Coal-series.*—In comparing the succession of strata at Ballycastle with those of the Ayrshire and Lanarkshire coal-fields, we cannot but be struck by the several points of analogy they present. Amongst these are (1), the thick beds of red sandstones and conglomerates, which form the lower part of the series; (2), the occurrence of beds of black-band ironstone; (3), also of earthy limestone with Carboniferous Limestone fossils, and of a marine bivalve (*Lingula squamiformis*) over one of the coal-seams of the upper division. These, and other considerations, have led me to the conclusion, that the Antrim coal-series belongs to the same geological horizon as that of the lower Coal-measures of Scotland, namely, the Carboniferous

Limestone ; and that the massive red sandstones and conglomerates at the base are the representatives of the calciferous sandstone series of that country.

This view is also borne out by the consideration, that the Carboniferous Limestone of Central Ireland in its northerly extension undergoes changes similar to those which affect the same formation in its extension into Scotland, and that there is a strict analogy in the geological relations of the Carboniferous system of both countries.*

Black-band ironstone is largely mined, and calcined on the spot, from whence it is exported to the furnaces of Messrs. Merry and Cunninghame on the opposite coast of Ayrshire.

### RESOURCES OF THE IRISH COAL-FIELDS.

The estimates of the resources of the Irish coal-fields were entrusted to the Author, upon the decease of Professor Jukes, one of the Royal Commissioners ; and the following are the results of the available quantities of coal, as published in the Report, and in arriving at which I had the

* The evidence for this proposition I have given at some length in the paper already alluded to in the Trans. Geol. Soc. of Ireland.

assistance of my colleagues of the Geological Survey, Messrs. G. H. Kinahan and J. O'Kelly:

| | Tonnage unworked. | Net tonnage available for use |
|---|---|---|
| 1. Ballycastle, County Antrim . | 18,000,000 | 16,000,000 |
| 2. Tyrone (visible and concealed) . | 36,950,000 | 32,900,000 |
| 3. Queen's County, Kilkenny, and Carlow (Leinster) . . . | 86,202,000 | 77,580,000 |
| 4. Tipperary . . . . | 29,500,000 | 25,000,000 |
| 5. Clare, Limerick, and Cork (Munster) . . . . | 23,000,000 | 20,000,000 |
| 6. Connaught (Arigna district) . | 12,000,000 | 10,800,000 |
| | 205,652,000 | 182,280,000 |

The quantity of coal raised in Ireland is comparatively small, and much below what it ought to be, if all the coal-fields were properly developed. It will be seen from the above estimates that the districts of Tyrone and Antrim have considerable resources in mineral fuel, which are at the present time made use of to a very limited extent. I cannot, however, but look forward to an improvement in this respect, when the facts of the case become more generally known, through the publications of the Government Geological Survey now in progress.

In 1859, the quantity of coal returned as raised in Ireland was 127,923 tons from 33 collieries.*

* "Mineral Statistics." This is probably an under-estimate.

# CHAPTER XXX.

## ON THE QUANTITY OF COAL IN THE CONCEALED COAL-FIELDS OF CENTRAL ENGLAND.

### *Coal-resources of the British Isles.*

Besides the coal stored in the known or visible coal-fields, it is unquestionable that very large quantities lie concealed beneath Permian, Triassic, and even Liassic strata beyond the margins of these coal-fields themselves. The extent and subterranean limits of these concealed reservoirs have been the subjects of investigation on the part of physical geologists for some years past; but it has been only very recently that our knowledge of the physical geology of the British Isles has been sufficiently advanced to enable us to arrive at anything like definite results on this question.

The solution of this interesting problem depends on the proper determination of two distinct branches of investigation. The first of these is

the restoration of the original limits, or margins, of the Carboniferous rocks; and secondly, the extent and direction of the axes of upheaval and depression along which the subsequent terrestrial movements have taken place, and the amount of denudation by which they have been accompanied or followed.

As the determination with any degree of precision of these severally simple problems, merging into the complex one, depended on a multitude of minute observations made over the whole area, properly laid down on maps, the question itself was not ripe for solution until the country had been surveyed by the Government Geologists; so that, had the attempt been made at an earlier period than the present, it must necessarily have failed, simply from the want of the necessary details. It was, therefore, fortunate that the appointment of a Royal Commission (part of whose duty was to report upon this question) was reserved for the present time, when the Government Surveyors had extended their investigations over nearly the whole of the districts of England occupied both by the coal-fields and the more recent formations, and were in a position to supply all the necessary details for the proper consideration of this complex problem;

in addition to the voluntary assistance readily tendered by many private observers.

One of the earliest attempts to define the limits of the concealed coal-fields was that made by the late distinguished Director-General of the Geological Surveys, Sir Roderick Murchison, who, upon the occasion of the meeting of the British Association at Nottingham, in 1866, read an essay on the subject,* before the Geological Section. In this paper the writer combats the view of the existence of workable coal, either under the Cretaceous rocks of the south of England, or of the Triassic rocks east of the Malvern Hills; while he points out that these hills themselves on the west, and the Cambrian Rocks of Charnwood Forest on the north-east, then full in view from Nottingham Castle, formed the "salient promontories" of the southern coast line, or margin, of the original coal-fields.

Having for several years, while engaged on the survey of the midland and western counties of England, kept this question steadily before me, as one of the very highest economic importance, I had the gratification of laying my views before the Royal Coal-Commission, in which I entered

* "On the Parts of England and Wales in which Coal may or may not be looked for."—Trans. Brit. Assoc., 1866.

into the whole question, as far as it related to the midland and northern counties; and at the request of the Committee, to whom this branch of inquiry was delegated, prepared a small map, showing what I considered to be the probable subterranean limits of the coal-formation.* These views were shortly afterwards repeated, or expanded, in a memoir, which I drew up for the Geological Survey, "on the Triassic and Permian Rocks of the Central Counties of England" in 1869.†

In his memoir on the Geology of the South Staffordshire Coal-field, the late Professor Jukes had thrown considerable light on the question of the limits of the Coal-measures of the central counties towards the south, and had also recognised in the rocks of Charnwood Forest the original land-marks of the old Carboniferous coast—a question on the determination of which the whole internal structure of the central counties hinges.‡

With reference to the south of England, Mr. Godwin-Austen, in 1855, read an able paper before the Geological Society of London, in

* The evidence and map are to be published with the Report of the Commission, vol. ii.

† "Distribution of the Coal-measures beneath the Triassic and Permian Rocks," chap. xi., p. 109.

‡ "Geol. South Staffordshire Coal-field," Preface to 2nd edit., 1859.

which he discusses the question of the probable extension of the Coal-formation beneath the Cretaceous rocks lying between the coast opposite Calais and the Somersetshire coal-field; and endeavours to show that the Coal-measures which tail out under the Chalk near Thérouanne probably set in again near Calais, thence are prolonged in the line of the Thames Valley parallel with the North Downs, and continue under the Valley of the Kennet into the Bath and Bristol coal-area. These views were repeated and amplified by Mr. Godwin-Austen in his evidence before the Royal Commission.

For the purpose of drawing up a report on the subject, the Commissioners wisely determined upon a division of labour, and entrusted the investigation of that portion relating to the central and northern counties to Professor Ramsay, and of that relating to the southern counties to Mr. Prestwich; and it must be admitted that it would have been impossible to select two persons more competent to discharge the important task committed to them, or in whose judgment the public will be disposed to repose greater confidence.*

* The Commissioners were assisted by several Geologists of eminence, who gave evidence on special points, viz., Professors

It would be foreign to the purpose of this work to discuss the views of the Commissioners in this place, for which the reader must refer to the Report itself, further than to observe, that between the views of Professor Ramsay and my own there is a very general accord; and that with regard to those of Mr. Prestwich, who generally coincides with Mr. Godwin-Austen in considering the existence of a coal-trough broken into several detached portions as highly probable, I readily admit the great ability with which the Commissioner has handled his subject, and the possible correctness of his views. (See General Map of the Coal-fields with this volume.)

As the existence of coal under the Cretaceous and other formations of the south of England is at present a subject of a highly speculative character, the Commissioners have refrained from offering any estimate of the quantity of coal which may be concealed under this tract; but it is otherwise with reference to the centre and north of England; and Professor Ramsay has drawn up estimates of the available quantity after deductions to the extent of 40 per cent. for loss

Phillips, Harkness, Geikie, Messrs. H. Howell, H. W. Bristow, A. H. Green, J. Clifton Ward, and Daniel Jones, R. Etheridge, R. Godwin-Austen, etc.

of various kinds. These estimates are drawn up for depths down to 4,000 feet below the surface, and even beyond this limit; but with this latter quantity it is scarcely necessary that we should concern ourselves.

The following Tables contain the calculated quantities of available coal down to a depth of 4,000 feet, both of the visible and concealed coal-fields of Great Britain and Ireland, and for all workable seams of 12 inches and upwards. I regret that seams of a less thickness than 2 feet should have been included in estimates for great depths; and on this account suggest the deduction of the quantity by 5 per cent., or one-twentieth; the remainder will then give, in my opinion, a truer result than that recorded by the Commissioners themselves:—

QUANTITIES OF AVAILABLE COAL IN THE VISIBLE COAL-FIELDS OF THE BRITISH ISLES,

As determined by the Royal Commissioners,

(Report, vol. i.) 1871.

| Commissioner, and Number on his Report. | No. | Name of Coal-field. | Amount of Coal in Statute Tons to depths not exceeding 4,000ft., and after the necessary deductions. |
|---|---|---|---|
| 1. Mr. Vivian .. 2. Mr. Clark ... | 1 | South Wales ... | 32,456,208,913 |
| 3. Mr. Dickinson ... | 2 | Forest of Dean ... | 265,000,000 |
| 10. Mr. Prestwich ... | 3 | Bristol ... ... | 4,218,970,762 |

| Commissioner, and Number on his Report. | No. | Name of Coal-field. | Amount of Coal in Statute Tons to depths not exceeding 4,000ft., and after the necessary deductions. |
|---|---|---|---|
| 9. Mr. Woodhouse ... | 4 | Warwickshire ... | 458,652,714 |
| 8. Mr. Hartley ... | 5 | South Staffordshire | 1,906,119,768 |
| Do. | 6 | Coalbrook Dale and Forest of Wyre ... | |
| Do. | 7 | Clee Hills ... ... | |
| 9. Mr. Woodhouse ... | 8 | Leicestershire ... | 836,799,734 |
| 11. Mr. Dickinson ... | 9 | North Wales ... | 2,005,000,000 |
| Do. | 10 | Anglesea ... ... | 5,000,000 |
| 7. Mr. Elliot... ... | 11 | North Staffordshire | 3,825,488,105 |
| 6. Mr. Dickinson ... | 12 | Lancashire and Cheshire ... ... | 5,546,000,000 / 200,000,000 |
| 9. Mr. Woodhouse ... | 13 | Midland ... ... | 18,172,071,433 |
| Do. | 14 | Black Burton ... | 70,964,011 |
| 4. Mr. Forster ... | 15 | Northumberland and Durham ... ... | 10,036,660,236 |
| 5. Mr. Elliot... ... | | | |
| 4. Mr. Forster ... | 16 | Cumberland ... | 405,203,792 |
| | | SCOTLAND. | |
| 12. Mr. Geddes ... | 17 | Edinburgh ... ... | 2,153,703,360 |
| Do. | 18 | Lanarkshire ... | 2,044,090,216 |
| Do. | 19 | Fifeshire ... ... | 1,098,402,895 |
| Do. | 20 | Ayrshire ... ... | 1,785,397,089 |
| Do. | 21 | East Lothian ... | 86,849,880 |
| Do. | 22 | Firth of Forth ... | 1,800,000,000 |
| Do. | 23 | Dumfriesshire ... | 358,173,995 |
| Do. | 24 | West Lothian ... | 127,621,800 |
| Do. | 25 | Perthshire ... ... | 109,895,040 |
| Do. | 26 | Stirlingshire ... | 106,475,436 |
| Do. | 27 | Clackmannanshire ... | 87,563,494 |
| Do. | 28 | Dumbartonshire ... | 48,618,320 |
| Do. | 29 | Renfrewshire ... | 25,881,285 |
| Do. | 30 | Argyleshire... ... | 7,223,120 |
| Do. | 31 | Sutherlandshire ... | 3,500,000 |
| Do. | 32 | Roxburghshire ... | 70,000 |
| | | IRELAND. | |
| 13. Professor Jukes, commissioner (*deceased*), and Professor Hull. | 33 | Ballycastle (Antrim Co.) ... ... | 16,000,000 |
| Do. | 34 | Tyrone ... ... | 6,300,000 |
| Do. | 35 | Leinster (Queen's Co.) | 77,580,000 |
| Do. | 36 | Tipperary ... ... | 25,000,000 |
| Do. | 37 | Munster (Clare, etc.) | 20,000,000 |
| Do. | 38 | Connaught ... ... | 10,800,000 |
| | | | 90,207,285,398 |

## Coal in the Concealed Coal-fields.

Summary of probable Amount of Coal under Permian and other overlying Formations at Depths of less than 4,000 feet; 40 per cent. deducted for loss and other contingencies, by Professor Ramsay, F.R.S., Commissioner.

| Districts. | Under. | Sq. miles. | Tons. |
|---|---|---|---|
| Warwickshire ... ... ... | Permian | 73 | 2,165,000,000 |
| Warwickshire, south of Kingsbury | New Red | 5 | 150,000,000 |
| Warwickshire, north of Atherstone | New Red | 6 | 179,000,000 |
| Leicestershire, Moira district ... | Permian | 15 | 1,000,000,000 |
| Leicestershire, Coleorton district | New Red | 25 to 28 | 790,000,000 |
| District between the Warwickshire & South Staffordshire Coal-fields | Permian and New Red | 116 | 3,400,000,000 |
| District between South Staffordshire and Shropshire Coal-fields | „ | 195 | 5,800,000,000 |
| Between the South Staffordshire and Coalbrookdale Coal-fields to the Cheadle and North Staffordshire Coal-fields... ... ... | „ | 200 | 4,580,000,000 |
| East of the Denbighshire Coal-field | „ | 50 | 2,489,000,000 |
| West and S.W. border of the North Staffordshire Coal-field. | „ | 50 | 1,500,000,000 |
| Cheshire, west of the Kerridge ... | Permian and New Red | 9 | 62,000,000 |
| Cheshire, between Woodford fault and Denton ... ... ... | „ | 36 | 1,790,000,000 |
| Lancashire, east and west of Manchester ... ... ... ... | „ | 30 | 350,000,000 |
| Lancashire, west of Eccles and Stretford to Prescott, Runcorn, and Hale-on-the-Mersey ... | „ | 130 | 3,883,000,000 |
| The Wirrell, the Mersey, and country to the North ... ... | New Red | 216 | 3,000,000,000 |
| Yorkshire, Derbyshire, and Nottinghamshire ... ... ... | Permian and New Red | 900 | 23,082,000,000 |
| Vale of Eden ... ... ... | Permian | 40 | 1,593,000,000 |
| Ingleton and Burton ... ... | „ | 3 | 33,000,000 |
| Severn Valley ... ... ... | New Red Marl | 45 | 400,000,000 |
| Ireland, Tyrone (Professor Hull).. | New Red Marl and Sandstone | 2,400 acres | 27,000,000 |
| | | Total ... | 56,273,000,000 |

*General Summary.*

| | Tons. |
|---|---|
| Quantity of available Coal in visible Coal-fields | 90,207,000,000 |
| ,, ,, concealed Coal-measures | 56,273,000,000 |
| | 146,480,000,000 |
| Deduct for coal-seams under 2 feet in thickness one-twentieth . . . . . | 7,324,000,000 |
| Leaving the net available quantity (1871) . | 139,156,000,000 |

It therefore appears that there is a total quantity of ONE HUNDRED AND THIRTY-NINE THOUSAND MILLIONS OF TONS available within a depth of 4,000 feet, which, at the rate of consumption of about one hundred and ten millions of tons, the quantity raised in 1870, would be sufficient to last for upwards of twelve hundred and sixty years. But it is impossible to regard the subject from this point of view: first, because the produce of the coal-fields is a variable and increasing quantity; and secondly, because the coal can never be exhausted otherwise than by a gradual and slow process.

To this question we shall return: meanwhile, the result of the calculations of the Commissioners must be satisfactory to the public at large, as demonstrating that for a long period to come British commerce is not likely to languish, or British household fires to smoulder, for want of that prime necessary of British life—COAL.

# PART III.

## CHAPTER I.

### COAL-FIELDS OF EUROPE.

*France and Belgium.*—The Coal-formation of these countries extends in a long and narrow trough from Aix-la-Chapelle westward, by Liége, Namur, Mons, Valenciennes, and Arras, near which place it is concealed beneath nearly horizontal beds of Cretaceous and Tertiary rocks. West of this town, however, the coal has been proved to a distance of 80 miles, valuable beds having been found at Thérouanne; and again they reach the surface a few miles north-east of Boulogne. Between the coal-field of Valenciennes and Boulogne, there is a large upcast fault bringing up the Devonian rocks, so that the Boulogne coal-district is a distinct basin.* Here

* As I have been informed by M. Louis Aguillon, mining engineer.

the dip is north, and the Carboniferous Limestone rises from below the Coal-measures. Before entering the sea at Calais, the Carboniferous strata are concealed by Lower Oolite, and nowhere reappear across the south of England till we reach Somersetshire.

The Franco-Belgian coal-trough is not everywhere continuous, being dissevered into elongated basins east of Mons, by the elevation of the Lower Carboniferous rocks. These latter themselves, as in the north of England, sometimes contain coal which has been mistaken for that of the true Coal-formation; and at Liége and Mons the strata are repeatedly crumpled, and thrown into a vertically zig-zag position, so that the same shaft passes several times through the same seam of coal. (See Fig. 21.) We have analogous cases along the northern flanks of the Mendip Hills in

Fig. 21.—SECTION ACROSS THE COAL-FIELD OF LIÉGE. 18 Miles.*




*a*, Tertiary Beds. *b*, Cretaceous. *c*, Devonian. N, Carboniferous.

* This and Fig. 22 are taken from a drawing by Mr. Prestwich, F.R.S., in Report of the Royal Coal-Commission.

Somersetshire, but not so generally known. The whole length of the trough, measured from Aix-la-Chapelle to Calais, and considered as continuous, is about 210 miles; but the breadth is variable, and never great.

The united extent of these coal-fields is probably nearly 1,200 square miles; but there is a considerable tract between Valenciennes and Calais, overspread by Chalk and Tertiary formations, under which the Coal-measures have not yet been proved, and where they lie at considerable depths.* The general arrangement of the strata in this part of their course is shown in the following sections (Fig. 22).

Fig. 22.—SECTION ACROSS THE COAL-FIELD AT VALENCIENNES. 13 Miles.

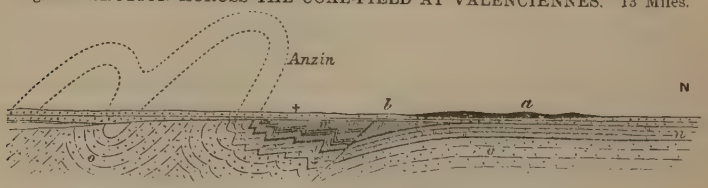


*a*, Tertiary Beds. *b*, Cretaceous. N and M, Lower and Upper Carboniferous.

I shall now state the names of the towns and villages situated along this trough, from west to east, taking as a guide the map of M. A. Dumont.†

* MM. Dufrénoy et Elie de Beaumont, Carte Géologique de la France.

† Carte Geologique de la Belgique. See, also, the elaborate maps and sections in the "Atlas zur Geologie der Steinkohlen Deutschlands," etc., von Dr. Geinitz, Munich, 1865.

Commencing at Lillers in Artois, it ranges by Bethune, Douai, Valenciennes, Condé, Mons, Namur, Huy, Liége, Aix-la-Chapelle—where the strata are folded into several distinct troughs; and about ten miles east of this town the Coal-measures become entirely concealed beneath the alluvial plain of the Rhine. Their course beneath this plain would appear to be north-east, by Juliers and Kaiserwerth, to the Valley of the Rhur, at the margin of the coal-field of Westphalia.

The depth of the Liége coal-basin at Mont St. Giles, according to Herr Von Oeynhausen, reaches to 3,809 feet below the surface, and the coal-basin of Mons is fully 1,865 feet deeper still. But this is small in comparison with the depth attained by the strata in the Saarbrück coal-field.

There are several other small coal-fields surrounding the central granitic plateau of France, of which the following are the principal:—

St. Etienne, about 15 miles long by 6 broad, yielding about 6 millions of tons of coal annually; the basin of the Saone et Loire; the basin of Alais, in the department of Gard and Ardèche; there are also the coal-districts of Ronchamp in the department of Haute Saône; and the

anthracite district in the department of Isère, or the Basin des Drac.*

*Rhenish Provinces of Prussia : the Saarbrück Coal-field.*—This is the largest and most important coal-field in western Europe, having an area of about 900 square miles. Along its western borders it is traversed by the river Saar, between the towns of Saarlouis and Saarbrücken, and extends in an easterly direction to Wellesweiller, where the beds pass below the Bunter Sandstone, which stretches along the southern borders of the coal-field, and along the valley of the Saar forms also the western boundary. The coal-seams, however, have been worked below this newer formation at intervals all along the margin.†

Towards the north, the coal-formation rests upon the Devonian schists of the Hundsrück (the "Koblenzer oder Spirifer-Schichten,") the general dip being southward, in which direction the Coal-measures pass below the New Red Sandstone of the Vosges, and Permian beds. There are extensive intrusions of igneous rocks, especially along the northern outcrop, which

* "Die Steinkohlen Deutschlands," etc. 1 band, cap. xii., 351.

† See the admirable chart and description of this coal-field by H. von. Rönne, Royal Inspector of Mines, in "Die Steinkohlen Deutschlands," vols. i. and ii.

detract from the mineral value of the district affected by them.

According to the observations of Herr von Dechen,* the thickness and depth of the Coal-measures in the Saarbrück basin is very great. From several measurements it was found that the lowest coal-strata known in the district of Duttweiler, near Bettingen, descend to a depth of 20,682 English feet, or 3·6 geographical miles below the level of the sea. This is a depth below the sea equal to the height of Chimborazo above it; and at this depth the temperature may be inferred to range as high as 467° Fahr.

This coal-field is remarkable for having yielded the remains of several species of reptiles, discovered by Mr. Leonard Horner, and named by Professor Goldfuss *Archegosaurus*, having characters intermediate between the Batrachians and Saurians.† There are also fish of the genera *Amblypterus*, *Palæoniscus*, *Acanthodes;* Crustacea, as *Uronectes*, *Estheria tenella*, *Leaia Bantschiana;* and Molluscs, *Unio carbonarius* (Bronn), *U. Kirnensis* (Ldwg.) The plant remains are abund-

* Geognostische Umrisse der Rheinlander zwischen Basel und Mainz, etc., v. H. v. Oeynhausen, H. v. Dechen, und H. v. La Roche (1825).

† Geinitz, "Steinkohlen," vol. i., 150.

ant, and amongst others include the more common Carboniferous genera, such as *Lepidodendron*, *Sigillaria*, *Ulodendron*, *Stigmaria ficoides*, etc.*

*The Coal-fields of the Kingdom of Saxony.*—The coal-formation of Saxony is distributed into a series of beds which, collectively, may be regarded as a representative series of the formation in Germany. Dr. Geinitz distinguishes in it five successive zones of vegetation, which have appeared at intervals during a long lapse of time.

*The Coal-basin of Zwickau-Chemnitz.*—This coal-field lies to the north of the Erz Gebirge, the range of mountains which forms the southern border of Saxony, and extends from the village of Marienthal, west of Zwickau, on the south-west to Liegmar, near Chemnitz, on the north-east, a distance of 4 geographical miles. Along the south the Carboniferous beds repose on Silurian and Devonian rocks.† Towards the north they are overlaid unconformably by a massive conglomerate formed of quartz, schist, and granite; and this by other beds of sandstone, shale, and porphyry, referable to the Permian series (Roth-liegendes).

The coal-field contains about 12 seams of work-

* A complete list is given by Dr. Geinitz, in the work quoted.

† Geognostische Karte von Sachsen, Section xv.

able coal, one of which, the "Russkohlflötz," is 12 ells in thickness.*

*Plant-remains.*—The lowest beds are characterised by *Sigillaria alternans*, *S. oculata*, *S. Cortei*, etc., *Sagenaria dichotoma*, *Neuropteris auriculata*, *Asterophyllites foliosus*, etc. Above this is the "Annularian Zone," with *A. longifolia*, *Sphenophyllum emarginatum;* next the "Zone der Farren," with *Sphenopteris irregularis*, *Sph. Macilenta*, *Odontopteris Reichiana*, *Neuropteris auriculata*, etc., *Lycopodites Gutbieri*, *Nœggerathia palmæformis.*

*Coal-basin of the Plauenschen Grundes, near Dresden.*—This coal-field is traversed by the Weisseritz, a short distance above Dresden, and has its longest diameter of $1\frac{1}{2}$ geographical mile, in a N.W. and S.E. direction, at right angles to the course of that stream.

The Coal-measures rest upon an irregular basis of syenite, porphyry, and (at the "Augustus" colliery) of clay slate, against a shelving bank of which the coal-seams terminate in a S.W. direction. The formation is overlaid by the conglomerate base of the Rothliegende, which is succeeded by higher divisions of the Permian series.

* Die Steinkohlen Deutschlands, vol. i., 56.

The coal is condensed almost into one principal and very thick seam, which is much broken by faults, and subjected to irregularities of dip and horizontal extension. The plant remains are similar to those already described for the Zwickau-basin.*

Saxony contains, besides the above, culm-measures at Ebersdorf; anthracite in the Upper Erzgebirge, and a small coal-field at Flöha and Gückelsberg.

*Westphalia.*—This coal-field extends from the right bank of the Rhine at Duisburg and Ruhrort, at its junction with the Ruhr, and extends along both banks of that river as far as Herdecke, and Wetter, in an easterly direction, a distance of about forty-six miles. The strata belong to the Carboniferous system, reposing on beds of Millstone Grit (Flötzleerer sandstein), which in turn overlie Carboniferous Limestone and Culm-measures; the limestone, however, thins away eastward.† Towards the north, the Coal-measures pass below Cretaceous strata (Kreidemergel) which rest unconformably on the convoluted edges of the Carboniferous rocks.

* Map and section of this coal-field, by Dr. Geinitz.—"Die Steink. Deutsch.," plates iii. and iv.

† The Culm-shales contain *Posidonia Becheri.*—"Siluria," 3rd edit., p. 427.

The Coal-measures have been bent into a great number of remarkably regular folds, not very sharp, and with their axes ranging in an average direction of E. 25° N. The consequence of this structure is, that the coal-seams are arranged in a series of narrow troughs, from thirteen to fifteen in number, when counted across the centre of the field. These flexures, on the whole, dip very gradually towards the E.N.E., and rise in the direction of the Rhine Valley, where they terminate; so that at Ruhrort, the coal-field is contracted to a narrow band. That it crosses under the river, and underlies the town of Meurs, there can be little doubt. The flexures I have described are clearly referable to the same system as those which have bent and folded the coal-seams of Belgium and the North of France.*

*Coal-field of Ibbenbüren, N.W. Germany*, examined by Herren Heine and Dortmond,† belongs to the Carboniferous formation with *Calamites*, *Sigillaria*, *Sphenopteris*, *Neuropteris*, etc. The Coal-measures, with five workable

* For map, sections, and description of this coal-field, the reader is referred to "Die Steinkohlen Deutschlands," etc., vols. i. and ii.

† Zeitschrift der Deutschen Geolog. Ges. Berlin, 1861.

coal-seams, are overlaid by Zechstein (Permian Limestone) and Triassic strata, along their southern borders.

*Coal-field of Piesberg, near Osnabrück, in Hanover.*—This coal-field, though now separated from that of Ibbenbüren, seems once to have been continuous with it; some of the seams of coal having been identified by Herr v. Velsen. The strata consist largely of sandstone and conglomerate with nine coal-seams, amongst which Römer has identified a large number of plants of the Carboniferous species, including *Stigmaria ficoides*, *Sigillaria striata*, *Lepidodendron dichotomum*, *L. elegans*, *Alethopteris pteroides*, *Sphenopteris gracilis*, *S. nervosa*, *Calamites Suckovii*, etc.*

*Bohemia.*—According to the accounts of M. Michel Chevalier, nature has left to Bohemia a rich dowry of mineral fuel. Besides the older coal-bearing strata, there are very extensive areas underlaid by lignite of excellent quality, now worked in the north-western districts.

M. Chevalier considers that the coal-formation belongs to two different ages, that of Eastern Bohemia to the Lower Permian or Rothe-todte-

* Die Steinkohlen Deutsch., Band i., 201.

liegende ; that of Western to the true Carboniferous system. The former extends in a band along the base of the Chaîne des Géants (Riesen Gebirge). This band is probably connected with the coal-formation of Silesia.

The western formation is distributed into three basins. 1st, that of Rakonitz ; 2nd, that of Radnitz ; 3rd, that of Pilsen. Of these, the basin of Rakonitz is the most extensive.

The flora of Rakonitz and Radnitz, described by M. Stur and Count C. Sternberg respectively, consist of about 21 genera of Carboniferous plants.

*The Weald Coal-formation of North-west Germany.*—In Hanover and N.W. Germany there occurs a great series of beds attaining a thickness of about 2,000 feet, which, according to the researches of Herr Credner, are referable to five stages,—

1. *Wälderthow* (with *Melania*), representing the Weald clay of England.
2. *Wäldersandstein* (or Deister sandstein), representing the Hastings sand of England.
3. *Serpulit*, limestones and shales
4. *Mündermergel*, marl and dolomite
5. *Plattenkalk*, with *Corbula inflexa*

} Representing the Purbeck beds of England.

These beds are underlaid by the Jurassic formation (Weisser und Brauner Jura) and dip beneath

Neocomian and Chalk strata, and are traversed by the rivers Vechte, Ems, Haase, and Weser, near Minden, and from thence extend in an interrupted band nearly to the bank of the Leine, south of Hanover.

The greater number of coal-seams occur in the upper member of the group (Weald Clay), the section at Deister showing about fifteen seams of coal, of which the greater number, however, are impure.

*Silesia.*—This coal-field is very extensive. It stretches from the eastern base of the Riesengebirge, at Bober and Schatzlar, in a semicircle by Landschut, Gottesberg, Waldenberg, and Tannhausen, to Eckersdorf, near the banks of the river Neisse. The Coal-measures have, in general, a base of Carboniferous Limestone, except towards the eastern portion, where they repose directly upon gneissose strata. They in turn are overlaid by Lower Permian (Rothliegende) and Cretaceous formations, and are often invaded by masses of porphyry and other igneous rocks.*

The coal-formation contains several valuable seams of coal, worked at several localities, as at

* See map and description of this coal-field in vols. i. and ii. of Die Steink. f. Deutsch.; also Murchison's "Siluria," p. 391-2.

the collieries of Louise, Gustav, Emilie, Morgen und Abendstern, Finstern, Frans-Joseph, and Segen-Gottes, Friedrich Wilhelm, and many others.

On the organic remains of this coal-field the writings of Dr. H. R. Göppert have thrown much light. This observer arranges the formation into zones characterised by special plants, such as *Stigmaria*, *Sagenaria*, and *Lycopodacea;* which Dr. Geinitz endeavours to identify with certain stages in the Coal-measures of Saxony. The usual Carboniferous genera of *Stigmaria* (root), *Sigillaria*, *Nœggerathia*, etc., are here well represented.

Bohemia also contains extensive areas underlaid by lignite of excellent quality.

*Prussian and Austrian Silesia.* — This coal-field lies on the borders of Poland, being traversed by the river Weichsel. The strata are referable to the Carboniferous system, and coal is extensively worked between Beuthen and Kostow.

*Moravia.*—The coal-field of Eastern Moravia lies along the banks of the Oder, and its tributary the Ostrawitza, for some distance upwards from their confluence; and mining operations are extensively carried on at Koblan, Hruschau,

Petrzkowitz, Ostran, Muglinan, Michalkowitz, and Hranecznik. In this district Baron Rothschild has both coal-mines and iron-works.

The coal-seams, one of which (Adolph-Flötz) is 72″ m. or about 25 feet in thickness, are included in the Upper Carboniferous series, and repose upon Flötzleerer Sandstein (Millstone Grit), Posidonomya shale, and Carboniferous Limestone.

Another coal-district is that of Rossitz and Oslawan, extending for several miles in a nearly N. and S. direction, and bounded on the west by gneiss, and on the east by syenite. The base of the formation is here a red conglomerate resting on the gneiss, and the Carboniferous rocks are overlaid towards the east by strata referable to the Permian formation (Unteres Rothliegendes.)*

*Anthracite of Switzerland, Savoy, and Italy.*— Dr. Oswald Heer has described the anthraxiferous deposits, which are worked to a considerable extent as fuel for locomotives of the Italian and Swiss Railways, etc. They occur amongst the Western Alps, including towards the west and south the valleys stretching through Savoy into

* Die Steinkohlen Deutschlands, etc., vol. i., chap. viii.

Dauphiné; and in an easterly direction into the Canton of Glarus.*

The anthracite is associated with schists and sandstones containing plant remains of true Carboniferous genera; and an examination of these has convinced Professor Geinitz that the anthracite beds are an altered Carboniferous product, contrary to the opinion of some observers, who have referred them to the Lias formation, on the ground of their being immediately overlaid (or underlaid by inversion) by shales with belemnites. The presence, however, of such examples as *Calamites cannæformis*, *C. Suckowii*, *Asterophyllites equisetiformis*, etc., seems to place their Carboniferous affinities beyond question.†

*Spain.*—The coal-field of Asturias, along the southern shores of the Bay of Biscay, is, as I am assured by Mr. R. Hunt, of considerable extent and productiveness, though at present but little opened up. The coal belongs to the Lower Carboniferous series.

M. Shultz, Director-General of Mines, states that the coal-basin of the centre of the Asturias forms a most extensive district, having more than sixty seams of coal, generally of the best quality,

* "Urwelt der Schweiz," Zürich, 1865.

† Die Steink. Deutsch., vol. i., 340.

approaching to a vertical position, and extending several leagues from west to east. The eastern limit of the coal-tract appears to be Santander; and westward, probably Cape Ortegal. The strike of the rocks is parallel to the axis of the Pyrenees; and near the eastern extremity of the range, on the southern flanks north of Ripoll, coal is extracted from beds which would appear to be an extension of those which yield that mineral in Asturias.

In Eastern Spain, there are also important coal-fields in the provinces of Teruel and Castellon de la Plana, and smaller tracts in the valley of the Guadaloupe and in Catalonia. In the province of Teruel they form three productive coal-fields, the strata attaining a thickness of more than 1,600 feet, as shown by M. Coquand.* There are ten beds of workable coal, lignite and jet, which are all being worked to some extent, and the whole of the series has been shown to belong to the Lower Cretaceous system, at the base of the Neocomian; and identified by Mr. J. W. Judd with certain strata occurring at Punfield Cove, in the Isle

* Bull. Soc. Géol. de France, 2 sér. t. xxiv. p. 144 (1868). See also Carte Géol. d. l'Espagne et du Portugal, par MM. De Verneuil et Collomb. 1864.

of Purbeck, and by him termed the "Punfield formation."*

*Russia.*—The coal-fields of Russia are considered by Sir R. I. Murchison to belong to the Lower Carboniferous period.† They are included in a set of strata which has a very extensive range, but is only at intervals productive of valuable coal-beds. These Carboniferous rocks form a narrow band along the western base of the Ural Mountains, from the Arctic Sea to lat. 51° S., plunging generally at high angles towards the west, and containing coal, here associated with sandstones, representing probably the "Millstone Grit" of England. On reaching the river Ural, they are concealed beneath the Permian formation, which laps over their edges; but they reappear again in Central Russia, occupying large areas in the governments of Riazan and Moscow, and stretching northwards to the White Sea, a distance of nearly 900 miles. Throughout this region they are only locally productive.

I am indebted to M. Louis Aguillon for the following account of the distribution of the Russian coal-tracts:—

* Quart. Journ. Geol. Soc., vol. xxvii. 207 (1871).

† "Russia and the Ural Mountains," vol. i., p. 69.

1. *Central Russia.*—Governments of Tould, Kaluga, Rjasan, and Moscow.

| | |
|---|---|
| Carboniferous Limestone formation. | White limestone with *Spirifer Mosquensis.* |
| | Yellow limestone with *Productus gigas, P. costatus,* and fish remains. |
| | Sandstones and shales with coal-seams. |

2. *Southern Russia.*—Basin of the Donetz, and the territory of the Don Cosaks. Coal-seams in sandstones and shales subordinate to the Mountain Limestone ("Calcaire de Montagne"); but there may also be beds of true Coal-measures in the district.

3. *Siberia.*—Great basin of Kousnetsk in the Altai. Coal-measures with beds of coal.

4. *Caucasus* (Txwibul).—Coal in strata subordinate to the Jurassic formation (terrain Oolithique).

5. *Oural.*—Districts of Swewolosky and Lasareff. *c*, Limestone with *spirifer; b*, sandstone and shale with coal; *a*, sandstone with *Productus.*

The coal-seams of the Moscow-basin are generally impure, pyritous, and fragile, and seldom equal in quality to the best lignites of the Tertiary age in the Alps. Some of the seams are from 3 to 6 feet in thickness, and, as they outcrop in natural ravines, are easily accessible. The coal-field between the Dnieper and the Don, north of the Sea of Azof, is considered by Sir R. Murchison to be by far the most valuable in Russia. This tract has a length from W.N.W. to E.S.E. of 230 miles, and its transverse diameter is 100 miles. Its total area is about 11,000 square miles. It contains many valuable beds of coal,

which dip under, and are overspread to the north-east by, Cretaceous rocks, and to the south-west by Permian limestone (Zechstein), under both of which formations the coal may at some day be mined, as is the case in Belgium and England. The most valuable seams occur at Lugan and Lissitchia-Balka.

It is a most remarkable circumstance in connection with the Donetz formation, that the same beds of coal, from being highly bituminous in the western parts of this coal-field, pass by imperceptible gradations into anthracite in the eastern parts, in a manner analogous to that of the South Wales coal-field in our own country. In the western, or bituminous districts, the coals are associated with limestones containing *Spirifer Mosquensis*. Towards the centre these calcareous beds tail out, and are replaced by beds of sandstone and shale, which become hardened and altered as the coal-seams become anthracitic.

On the whole, it would appear from the copious details and sections contained in the elaborate work of Murchison and his companions, that the coal-fields of the Russian empire, certainly of enormous area, are in some parts highly productive, and, if vigorously opened up, are likely to become of great economic value. The whole

coal-producing series, also, appears to be of an earlier date than the true Coal-measures of England; the greater part of the beds of coal being contained in the Carboniferous Limestone-series, as in the case of Scotland.

*Poland.*—At the south-western extremity of Poland, and within a short distance of the confines of the Russian, Austrian, and Prussian States, is situated a small but extremely productive coal-field. It contains three known coal-seams, the middle one of which is no less than 16 yards in thickness, and is probably the thickest bed of mineral fuel in Europe. It is worked from the outcrop in mines near the village of Dombrowa, and has the following composition :—

| | |
|---|---|
| Carbon . . . . . | 50·38 |
| Volatile matter . . . . | 47·23 |
| Ashes . . . . . | 2·39 |
| | 100·00 |

This coal-seam dips from the outcrop at an angle of from 12° to 32°.

The two remaining seams vary from 3 to 9 feet in thickness, and differ from the main seam in having a smaller per centage of volatile matter.

The area of the coal-field is supposed to be

about 16 square miles. The formation belongs to the true Carboniferous period, reposing on Silurian rocks, and dipping under Tertiary strata.*

* For this account of the coal-field of Poland, I am indebted to Captain A. Antipoff, of the Russian Engineers.

## CHAPTER II.

### INDIA.

The approach towards completion of the surveys of the coal-fields of India by the Government Geological Surveyors, under Dr. Oldham, and the publication of an able series of reports to accompany the maps on which the details are pourtrayed, puts us in possession of accurate information regarding each coal-field individually.

The general result of these surveys is to show that there are very large tracts stored with coal in northern India, chiefly in the valley of the river Damuda; which, as the Messrs. Blanford* have suggested, were once connected in one continuous area, but are now dissevered, owing to large displacements of the strata and denudation. Of these the following are the names and approximate areas:—

* Report on the Talcheer Coal-field. — "Memoirs of the Geological Survey of India," vol. i., part 1.

*Coal-fields of the Damuda Valley.*

| Name. | Area. |
|---|---|
| 1. Raniganj . . . . . | 1,000 square miles. |
| 2. Karanpura . . . . . | 472 ,, |
| 3. Bokaro . . . . . | 220 ,, |
| 4. Jherria . . . . . | 200 ,, |
| 5. South Karanpura . . . | 72 ,, |
| 6. Ramgurh . . . . . | 40 ,, |

There are also the coal-fields of (7) Kurhurbari, (8) Deoghur, (9) Nerbudda, and (10) of Assam, which lie out of the Damuda district.

*Geological Age.*—With the exception of the coal-bearing strata of Assam, which, according to the views of Mr. Medlicott, are referable to the Lower Tertiary period, the coal-fields of Northern India are formed of the "Damuda series," lying unconformably on the Talcheer beds, and surmounted in some places by massive sandstones of the "Mahadeva series." The Damuda series consists of three divisions, a lower, middle, and upper, and resemble in appearance the Coal-measures of England, being composed of sandstones and shales, with beds of coal and ironstone; probably of fresh-water origin. Their actual geological age is, however, still a matter of uncertainty, owing to the absence of any organic remains except plants, and a few reptiles of indeterminate age. Amongst the plants, however,

the *Cycadaceæ* are the predominant forms; along with which are some genera such as *Equisetum*, *Cyclopteris*, and *Sphenopteris*, which are found both in Palæozoic and Mesozoic deposits, and others as *Voltzia*, which is Triassic, and *Brachyphillum*, which is Jurassic.

The evidence is, therefore, conflicting; the abundance of cycads giving a Jurassic aspect to the flora, while the other forms belong to a more ancient period. All, therefore, that can be stated is, that the Coal-formation of India is more recent than the Carboniferous period of Europe, and is referable to some portion of the Mesozoic epoch.*

*The Raniganj Coal-field.*—This is the most important coal-field in India, and seems destined to be of great economical value at no distant period. It lies at a distance of 120 to 160 miles N.W. of Calcutta, along the valleys of the Damuda and Adjai rivers. From the report of Mr. W. T. Blanford,† we gather that the strata containing coal attain a vertical thickness of about 12,000 feet, rising and outcropping towards the north, and in the opposite direction abruptly

* See the discussion of this question by Dr. Oldham, in Mem. Geol. Surv. India, vol. ii.

† *Ibid*, vol. ii.

ending against the older crystalline rocks, along one of the largest faults on record, which ranges in a direction from west to east. There are numerous beds of coal, which were estimated by Mr. D. H. Williams (1847) to attain a combined thickness of 354 feet. This coal, though inferior to that of England or Wales, has been proved to be perfectly adapted for locomotive or stationary engines, or for the smelting of iron; yet with such prodigious supplies, not more than half a million tons were raised in the year 1868 out of a total production for India of 547,971 tons.*

*Karanpura Coal-field.*—This coal-field is situated in the Damuda valley, between 84° 51′ and 85° 30′ E. long., and 23° 37′ and 23° 57′ N. lat., and covers an area of 472 square miles. From the report of Mr. T. H. Hughes,† of the Indian Survey, it appears that there are numerous seams of coal, giving a total vertical thickness of 35 feet; calculated to yield about 8,750 millions of tons. A specimen from the larger of the Gondalpura seams gave, on being assayed, the following results:—

Carbon 64·5, Volatile matter 27·0, and Ash 8·5.

* Mineral Statistics of India, collected by Dr. Oldham. Mem. Geol. Surv. India, vol. vii., part 1.

† *Ibid*, vol. vii., part 3, with map.

Iron ores, both clay-ironstone and hæmatites, are abundant.

*Bokaro Coal-field.*—This is the third in importance amongst the coal-tracts of the Damuda valley. From Mr. T. W. Hughes' report we find that it contains several seams of valuable coal from the "Barakar beds," capable of yielding about 1,500 millions of tons. The most valuable portion of this field lies between the river Koonar and the eastern boundary. Beds of ironstone are also present.*

*Jherria Coal-field.*—This tract lies about 170 miles from Calcutta, along the Damuda valley, and extends from east to west for a distance of 18 miles; its greatest breadth is 10 miles. Mr. Hughes in his report states,† that in a series of beds of about 6,000 feet in thickness there are beds of coal having a combined thickness of about 80 or 100 feet, the thicker seams being in the lower part of the Damuda series. Some of the coal is of good quality, especially that of the "Barakar beds." Dr. Oldham estimates the possible yield of this coal-field at 465 millions of tons, and adds, "whatever the margin of error may be, the facts are sufficient to prove the existence

* Mem. Geol. Survey, India, vol. vi., part 2.
† *Ibid*, vol. v., p. 230.

of a very large amount of good fuel in this Jherria coal-field, which at some future period will be found most valuable."*

*South Karanpura Coal-field.*—This little tract of Coal-measures is separated from the larger field above described by a strip of metamorphic rocks.† In proportion to its extent, it appears to be even more productive than the larger field, containing as it does about 70 feet vertical of coal, and capable of yielding, according to the estimates of Mr. Hughes, 75 millions of tons of coal. Iron ores are also abundant.

*Ramgurh Coal-field.*—This coal-field also lies in the Damuda valley between the meridian of 85° 30′ and 85° 45′ E. long. From the report of Mr. V. Ball, it appears to have an area of about 40 square miles. The coal in the eastern part of the district occurs generally in thick seams; but the quality is so variable, and there are such frequent alternations with bands of stony shale, that Mr. Ball forms a low estimate of the economic value of this portion. In the western extension of the field, where the seams are of better quality, they are much broken and crushed,

* Mem. Geol. Survey, India, vol. v., p. 336.

† Map accompanying the Report of Mr. Hughes.—*Ibid*, vol. vii., part 3.

owing to numerous faults and flexures of the strata.*

*Kurhurbari Coal-field.*—This coal-field is one of those which lie beyond the limits of the valley of the Damuda. The coal-beds are, however, referable to the "Damuda series," and from the superiority of their quality, and owing to their position with reference to the East Indian Railway, and the large towns west of Dinapore, are likely to become of great economic value. The area of the field is only 8 square miles, and its general structure that of a basin;† while some of the coal-seams reach a thickness of 14 to 16 feet, but vary rapidly in this respect. Mr. Hughes estimates the yield of this tract at 80 millions of tons of available coal.

*The Deoghur Coal-fields.*—There are three little tracts grouped by Mr. Hughes, who has surveyed them, under this name, lying between long. 86° 37′ and 87° 5′ E. to the north of the Barakar river. They do not require special notice, as they are economically unimportant.

*Nerbudda Coal-field.*—This coal-field includes a considerable tract in Western India, lying in part along the valley of the Nerbudda River, and

* Mem. Geol. Survey, India, vol. vi., part 2.

† Mr. T. W. Hughes.—*Ibid*, vol. vii., part 2.

containing both coal and iron-ores. The district has been explored by several observers, the latest of whom, Mr. Medlicott, has drawn up a report on behalf of the Geological Survey.* The actual extent of country over which these mineral deposits may be supposed to range has not been precisely determined, owing to the want of actual mining operations, but coal-seams of good quality and thickness have been observed along the banks of the Sitariva, the Tawa near Salyia, the Mahanuddi and Johilla rivers; and Mr. Medlicott states that unquestionably from some of these localities large supplies of good coal might be obtained. The strata in which the coals occur belong to the Damuda series.

*Assam Coal-fields.*—Large quantities of good coal are known to exist in Upper Assam, which are as yet almost wholly undeveloped. According to the determination of Mr. Medlicott, of the Geological Survey of India, they are referable to a geological age more recent than those of the Damuda Valley, the Lower Tertiary. The seams of coal are often remarkably free from ash, as will be seen by the following assays of specimens taken from three localities:*—

* Mem. Geol. Survey, India, vol. ii.
† *Ibid*, vol. iv.

| | Fixed Carbon. | Volatile matter. | Ash. |
|---|---|---|---|
| Terap . . . | 61·8 | 36·5 | 1·7 |
| Namchik . . . | 50·4 | 44·6 | 5·0 |
| Jaipoor . . . | 53·0 | 43·3 | 3·7 |

As a large amount of traffic is carried on by steamers on the Brahmapootra river, it is strange that up to the period of Mr. Medlicott's report no attempt had been made to utilise the stores of coal in Upper Assam for steam navigation. For this and similar purposes they are well adapted; and, now that reliable information has been obtained concerning their nature and extent, it may be hoped that some attempt will be made to turn to account these valuable stores of mineral fuel.

*Summary.*—From the above brief description of the coal-fields of British India, taken from the careful and elaborate reports of the Government Surveyors, which are accessible to all, it may be gathered that Northern India has all the materials for the development of commercial and industrial pursuits. The great valley of the Ganges, navigable for such great distances inland from the ocean, and now traversed by lines of railway, has also enormous stores of coal and iron—those materials which have been the source of the wealth of Great Britain itself. It is also a cotton-growing country, and there is therefore

no apparent reason why cotton might not be manufactured on the spot where it is grown. With such advantages, Northern India *may* become a great manufacturing country. Whether it *will* become so is a question which will be determined on moral and social grounds; depending on the enterprise, perseverance, and intelligence of the people themselves.

## CHAPTER III.

### COAL-FIELDS OF CHINA, AUSTRALIA, AND NEW ZEALAND.

*China.*—The recent researches of Baron von Richthofen, the enterprising traveller, together with the accounts received from time to time through other sources, leave no doubt that there are large deposits of coal in this great empire. The provinces of Hoonan and Shansi, lying to the south of the Yang-tse-Kiang, are richly stored both with coal and iron. In the latter province the Baron came upon a region which he describes as "one of the most remarkable coal and iron districts in the world."* He considers it to be in extent considerably greater than that of Pennsylvania. These vast resources are not utilized by the natives, owing to unskilfulness in mining, and chiefly to the absence of roads. Another of these districts lies near the city of

* From Report forwarded to the Foreign Office, and quoted by Sir R. Murchison in the Anniversary Address to the Roy. Geog. Soc., London, 1871.

E-u, in the prefecture of King Hua (lat. 29° 15′ N., long. 119° 46′ E.) The coal is here worked in pits from 300 to 500 feet in depth, and the mines are opened out into galleries branching off into the seams at successive stages in the descent.* The mineral is also worked in the cliffs of the Pe-Kiang river at Tingtih, by means of adits driven into the side of the hill at the outcrop of the coal-seams. And lastly, at a place five miles from the city of Whang-shih-Kang on the river Yang-tse-Kiang, an account of which is recorded by Mr. Oliphant.†

The working of coal in China dates probably from a very ancient period. Our earliest notice is by the celebrated traveller, Marco Polo, towards the close of the 13th century.

As regards the geological age of the coal-formations of China, the evidence which we possess leads to the conclusion that they are more recent than the Carboniferous, and probably of Jurassic age. Remains of cycads are abundant, and have been collected by Mr. R. Pumpelly;‡ on the other hand, the characteristic Carboniferous genera and species are apparently wanting. It

* Rev. R. H. Cobbold, Journ. Geol. Soc., vol. xii.

† "Lord Elgin's Mission to China and Japan," vol. ii., p. 389.

‡ American Journal of Science, Sept., 1866.

seems, therefore, not improbable that the Indian and Chinese carbonaceous deposits are of the same, or nearly the same, geological age.

*Malaysia and Japan.*—That magnificent group of islands lying between the Indian and North Pacific Oceans, seems to be as rich in the mineral treasures of the past as it is in the vegetable productions of the present. Besides gems, and metallic ores in abundance, including iron, which yields the unrivalled Japanese steel, several of these islands contain strata stored with coal. And when we regard the geographical position of these islands, lying on the confines of the Eastern hemisphere, and in the track of vessels trading between America and Asia, the economic value of these sources of fuel can scarcely be over-estimated. It was on this account that the American expedition to Japan kept steadily in view the establishment of depôts for coal on several points on the coast of that island for the supply of American steam-vessels.* With a similar object, the Indian Government have given attention to the supplies of coal known to exist in Borneo, and have been successful in inducing the chiefs to form depôts of coal on the coasts. It is also satisfactory to

* "American Expedition to Japan."

learn that the trials made both in New York, Calcutta, and in the steam-vessels themselves, of samples of coal from these islands, are very favourably reported.

In Japan, coal-mines are worked in the districts of Kiusin and Niphon; and the testimony of Kæmpfer regarding its abundance is corroborated by that of the officers of the American expedition. The Islands of Formosa and Karapty, the latter of which is now appended to the Russian Empire, also contains this mineral in considerable quantity.*

In Borneo, the province of Labuan on the north-west coast abounds in coal, and there is at least one important colliery now in work. Several beds outcrop near the river Gooty, at the north-east of the island. Mr. Bellot states that the mineral resembles the best cannel, and burns readily.† It also occurs in Pulo Cheremin, an island at the mouth of the Borneo river, where it is stated to form a naked surface stretching out to sea, and laid bare at ebb tides. The glistening aspect of the mineral washed by the saline waters, and glancing back the rays of a tropical sun, is said to have suggested its name of "Mirror Island."

* Atkinson's "Travels in the Amoor."

† Mr. T. Bellot, Journ. Geol. Soc., vol. iv.

It is highly probable that deposits of coal are by no means confined to the above island, but that they are also distributed more or less extensively throughout most of the islands lying between the Continent and Australia.*

## AUSTRALIA.

The great Anglo-Saxon Empire which is springing up at the antipodes, seems to have all those mineral resources so necessary to the commercial prosperity of a nation. Amongst these, coal is not the least important; and that it occurs in vast quantities will be apparent from the following brief statements of each of the provinces into which Australia has been parcelled.

*Victoria.*—The state of Victoria contains carbonaceous deposits, from which coal has already been extracted. The late Government geologist, Mr. Selwyn, was engaged for several years in investigating the mineral resources of this highly-favoured colony. Mr. Selwyn states that if the mass of the coal-bearing strata of Victoria be Oolitic (Jurassic), there are certainly others in the eastern districts of the colony which contain

* Great Britain has coal-depôts for her Navy at the following Asiatic ports:—Aden, Trincomalie, Singapore, and Hongkong.

plants of the true *Carboniferous* type, while the beds themselves rest and pass downwards into calcareous rocks with fossils, which are nearly all Carboniferous or Devonian forms.* How remarkable, that both here and at our Antipodes, in Britain in the Northern, and Australia in the Southern hemisphere—countries now standing in the relation of parent and child—Nature should have been elaborating mineral fuel during the same eventful period of the Earth's bygone history!

*New South Wales.*—Our knowledge of the coal-resources of New South Wales are chiefly due to the labours of the Rev. W. B. Clarke, F.G.S., M. de Strzelecki, Professor Dana, and Mr. Keene, Inspector of the coal-fields of New South Wales. I have been favoured by the Rev. Mr. Clarke with a general summary of the results arrived at with reference to the extension of the coal-formation,† and have selected portions which will serve to present the reader with a fair view of the subject, and also may be of use to those who may be residents in the colony itself.

* "Geology of Victoria," Journ. Geol. Soc. London, vol. xvi., p. 145.

† Dated St. Leonard's, 19th Oct., 1861.

Mr. Clarke arranges the carbonaceous rocks of the Colony in three divisions, viz.:—1. The Wianamatta; 2. The Hawkesbury; and 3. The Lower Carboniferous beds. Between the second and third, and extending into the latter of these, come in the workable coal-seams, which are in association with shales and sandstones bearing impressions of plants, which some geologists refer to the Great Oolite. But, as these plant-beds have been found with no less than five seams of coal of a very productive character, in the heart of the beds charged with Palæozoic fossils, it is clear that whatever be the age of the coal, the series in which it occurs extends downwards into the Mountain Limestone, which is also, in some places, in connection with plants of a Palæozoic type, such as *Knorria*, *Lepidodendron*, etc. The particulars have long ago been published, and most recently by the author in the work cited below.*

"Whilst, therefore, since 1854 a great progress has been made in filling up the gaps that were supposed to exist, and in developing the actual phenomena of the coal-beds, some uncertainty

* Researches in the Southern Gold Fields of New South Wales, by the Rev. W. B. Clarke, M.A., F.G.S. etc., 1860, chap. xiv., p. 245.

yet remains as to the positive age to which they must be referred. These considerations, nevertheless, do not affect the extent of these deposits and the probable abundance of fossil fuel. This is a subject of vast and increasing importance to the rapid development of the Colonies, and to the progress of communication by railways, which have sprung into existence since the Exhibition of 1855, and by steam navigation, now rapidly advancing, as well as to manufacturing establishments rising around."

"In the year 1847, the author of this notice stated (in evidence before a Committee of the Legislative Council,) that he had then obtained acquaintance with the existence of Carboniferous formations over from 17,000 to 18,000 square miles on the eastern side of the Colony, between 32 degrees and 35 degrees South. Since then, his own experience has been much enlarged during his explorations of Australia; and, coupling his present actual knowledge with the information derived from other explorers, he is now enabled to state that, compared with its Goldfields, the Carboniferous portion of this territory is of infinitely greater importance than was at that time supposed."

"On the East coast of New South Wales, the

Carboniferous formation presents itself with little interruption, except from extensive dykes of trap (of which the basaltic dykes strike N.E., and the greenstone dykes, which are well exemplified on the coast at Newcastle, strike N.W.), from between 31 deg. 30 min. South to at least 36 deg. South; and in two principal parts of this coast line, valuable coal-seams occupy the cliffs washed by the ocean, about Newcastle and the North of Illawarra. The position of the former is very advantageous for all the purposes of commerce; the latter has some disadvantages, owing to the difficulty of approach to the cliffs from seaward."

As in Newcastle-upon-Tyne, so also at Australian Newcastle, vessels can receive coal immediately from the mines at the mouth of the Hunter river, which by structures erected on a grand scale has been turned into an accessible and safe harbour. The coal-fields lie close by the sea-shore, some beds cropping out even upon the steep coast-bluffs, so that they can be distinctly seen from the sea, on a voyage from Sydney to Newcastle. There are, also, in the vicinity of this town already eleven known seams extending over an area of about 6 miles along the coast, and 20 miles into the interior, having a thickness of

from 3 to 30 feet.* The analysis of this coal gives: carbon 74·13 to 78·0, hydrogen and oxygen 25·87, ash 5·0, water 1·6.†

At Ballambi Point, north of Wollongong, operations for the shipment of coal, brought by a tramway from the seams situated in the Illawarra escarpment, have been some time carried on by Mr. Hale, the spirited proprietor of these seams, who has within the last few years entered on this important undertaking. Steps are also in progress for the commencement of a breakwater harbour at that Point, where the mineral treasures of vast extent, from no less than twelve seams, will be available for transport; and at Wollongong a new basin is being excavated.

"As some of these seams are traceable for many miles both northward and southward, the Illawarra will ere long supply abundance of fuel well calculated for the purposes of navigation.

"Passing to the coast north of the Hawkesbury, we find another series of seams extending from the Tuggerah Beach Lake to the left bank of the Hunter; the cliffs about Newcastle presenting an escarpment, varying up to 300 feet, in which seams of coal, that are worked inland, present themselves. Other seams occur in the

* Hochstetter's "New Zealand," Eng. trans., p. 75. † *Ibid*, 91.

Western Flats, and have been worked to various depths down to 400 feet below the sea. Within the last two or three years numerous fresh openings have been made, and some rich seams, fully equal in thickness to the nine feet Upper Illawarra seam, have been discovered.

"Passing to the westward, the whole valleys of the Hunter and the Goulburn offer occasional occurrences of valuable Carboniferous deposits; and as at Stony Creek, near Maitland, and Anvil Creek, and other localities, five seams occur at an enormous depth below the Newcastle beds. The following localities indicate some of the places where coal has long been known; viz.—Four Mile Creek, Hexham, base of the Myall Range, Wollombi, Morpeth, Maitland, Wallis Creek, Anvil Creek, Purrendurra, Glendon Brook, Tolga Creek on the Paterson, Leamington, Wollon, Jerry's Plains, Sadleir's Creek, Foy Brook, Falbrook, Ravensworth, Maid-Water Creek, Muswell Creek, Edenglassie, Piercefield, north of Bengala, at Gill's Cliff and Coyeo on the Page, near Murrurundi and Harbenvale, Kingdon Ponds, Mount Wingan, near Scone, and at the junction of the Hunter and Goulburn, as well as above on the latter river, near Gummum. Coal-beds also occur on the Talbragar and Cudgegong rivers.

"South-east of these localities, coal appears at the foot of Mount York, and at Bowenfells, near Hassan's Walls; on the rivers Coxe and Wollondilly, on the Nattai, at Barragorang, on Black Bob's Creek, to the west of the Southern Hanging rock, at Balangola Creek, west of Arthursleigh, in the deep gullies about Bundanoon, Meryla, and the Kangaroo Ground; below the plateaux, on which the seams crop out on the face of the Illawarra escarpment, above Jamberoo and Mullet Creek; and below Mounts Kembla and Keera, seams to the amount of twelve, occupying patches of cliff along the coast from near Waniora Point to a great fault ten or twelve miles northward; northwards of which, at Gara, the beds of shale connected with the coal rise at an angle of from two to four degrees from beneath the Hawkesbury rocks, which thence to the north of Brisbane Water occupy the coast. This dip seems general in the Illawarra, and also occurs on the Hunter. But it varies up to 16° on that river, and north of the Karuah to 50°, and in places to 90°.

"Passing on thus to the country about Port Stephens, between the Karuah and the Manning, we find a region of coal full twenty-five miles in extent, in which are no less than eighteen seams;

of which one, measured by the writer, was thirty feet thick.

"This region has since been surveyed by M. Odernheimer of Nassau, for the Australian Agricultural Company, in whose estate this field occurs.

"Coal occurs in patches in other parts of New South Wales, and has been occasionally worked to the north of the Mittagong Range in the steep face of cliffs above the Nattai Creeks, near the Fitzroy Iron Works.

"Respecting the position of the coal in some of the localities, it may be observed, that the strike and joints of the rocks lead to the conclusion that the coast line merely intersects obliquely the general area or basin, which has thus its minor axis along the Hawkesbury; the Newcastle seams finding their prolongation about the Werriberri Creek on the Warragamba River, and the Bullai seams having had their northern prolongation many miles in advance of Newcastle, in a tract destroyed or below the sea: all the evidence collected by observation leading to the inference that this Eastern coal-field is only a portion of a once much larger area, distinctive portions of which are occasionally thrown up by the sea on the beach rocks and sands. This is

true, especially, of the Illawarra, where at Towrudgi Point, north of Wollongong, fossil wood and trees exist near low-water mark, imbedded in natural position in the rocks; and at Ballambi, where similar trees are entangled, two seams of coal making their appearance also just behind the beach, and at and below the sea-level; and after gales, the beach at Wollongong is strewn with fragments of these and other Carboniferous spoils. Similar fossilized wood occurs at Newcastle, and in the Palæozoic beds of Black Head, south of Kiama, and of Stony Creek near Maitland.

"Judging from the enormous development of the Hawkesbury rocks on the Western slopes of the Cordillera, where they occur in patches at very great elevations on the summits of the older formations, or on the plains from the Western end of the Liverpool Range to the parallel of 26 degrees south, it may be fairly concluded that there is no present possibility of calculating the actual amount of available coal on that side of the Colony. Seams of coal are known, however, to occur in this area, on the Castlereagh; near the Nudawar Ranges, and on Reedy Creek, near Warialda, whence the writer procured cannel coal.

"A considerable portion of the counties of Clarence, Richmond, and Rous is occupied by a similar formation, and workable coal exists therein both on the Richmond and Clarence Rivers."

*Queensland.*—"Although the districts of Darling Downs and Moreton Bay are now parts of the new Colony of Queensland, and coal-seams exist on the Bremer and Brisbane Rivers, and along the shores of the Bay, as on the coast, and on Mount Keera, so here the coal-seams are accessible by adits, and on the Brisbane the steamers can load by lying literally at the mouth of the mines, as is the case at Lake Macquarie. This phenomenon is characteristic of the coal of New South Wales. It is due to three principal conditions :—1. The generally nearly horizontal planes of some of the seams; 2. The elevation of the coal-country above the sea-level; and, 3. The persistent nature of the joints which traverse these elevated beds, at right angles to the bed planes, thus occasioning continual escarpments, in which the out-cropping seams appear on the faces of cliffs, or in more or less accessible ravines."

"To the northward of the Condamine, the Carboniferous formation extends over vast regions,

in which coal undoubtedly exists. The writer has reported (Report X., Oct. 1853,) the formation on the Condamine as occupying probably 20,000 square miles. He calculates also, from such data as are available, that on the M'Kenzie it occupies an extent of 40,000 square miles; and on the Robinson, 20,000 square miles. The country between the Condamine and the parallel of 32 degrees, occupied by similar beds, cannot be less than 15,000 square miles. And if we take into account the facts stated by Sir T. L. Mitchell, in his history of the explorations of the far interior, and the existence of the same Carboniferous formations, not only in various parts of the littoral districts of Victoria, but as far as the Grampian Mountains, westward of the 143rd meridian, it becomes manifest that there is no country on the globe, America excepted, occupied to so large an extent by these formations as Australia; and, with trifling exceptions, nearly all the enormous areas occupied by these Carboniferous beds belong to New South Wales and Queensland."

*Tasmania.*—"This district abounds, also, in coal-beds, some considered the equivalents in age and position of the Illawarra and Newcastle seams of New South Wales; others, the equiva-

lents of the *lower* coal-seams of Stony Creek near Maitland, occurring in the midst of a Palæozoic Fauna. The author's opinion of these Tasmanian coal-fields, as formed from personal inspection, has been confirmed by Mr. Gould, the Geological Surveyor of that Island, in his recent Reports to the Tasmanian Government."

"That gentleman has also discovered evidence to prove that the 'combustible schists' or 'Dysodile' of the Mersey River, on the North Coast of Tasmania, contain zoological fossils of Palæozoic age. In New South Wales, beds of a similar kind exist, of which specimens are exhibited from the higher northern slopes of the Liverpool Range, and from the base of Mount York in the County of Westmoreland. Examination shows that they are charged with *resin* (probably not unlike that so abundant in the New Zealand coal); and, therefore, they may perhaps be valuable as a source for the manufacture of mineral oil. The specific gravity of some of this substance, the author has found to be 1·204. In appearance it is like lignite passing to cannel. It ignites readily, and burns with a prevailing odour. It is highly conchoidal in fracture; and lies in masses from 6 to 12 ins. thick. A somewhat similar substance occurs in the Island of

Cuba, and is there called *Chapapote*. But the New South Wales mineral is not so bituminous, and the specific gravity is less."

### *Coal-fields of New Zealand.*

This wondrously rich and varied Group of Islands seems to abound in all the mineral products of nature, not excepting coal. It is true that, for the present, gold almost absorbs the interest of its inhabitants, but this is only for a time; and as the grains and nuggets of this precious metal are washed out of the alluvial gravels, and gradually diminish in abundance, so the beds of coal will crop up, and assert their paramount importance as a source of prosperity and wealth to the inhabitants.

For a series of years, the Carbonaceous deposits of New Zealand have attracted the attention of naturalists who have visited this country.*

Mr. C. Forbes, surgeon on board H. M. ship *Acheron*, sent a very interesting account of the coal-seams of a large extent of coast, and of the

* One of the first observers on the geology and palæontology of the island was Mr. Walter Mantell, son of Dr. Mantell, author of the "Medals of Creation," who sent home through his father communications on the geology of parts of the country to the Geol. Soc. London, 1848.

experiments made on their qualities and composition, which he published in the Journal of the Geological Society of London, vol. xi., 1855.

In 1859, Dr. F. von Hochstetter, accompanied by his friend and travelling companion, Dr. Julius Haast, were appointed by the Government to commence explorations in the provinces of Auckland and Nelson; and this latter geologist, after having finished, in 1860, some important observations in the western districts of Nelson, was appointed Geologist by the Provincial Government of Caterbury. The labours of these enterprising naturalists have thrown much light on the coal-resources of large portions of the Island. Finally, in 1861, Dr. James Hector was appointed Geologist to Otago, and he has since (in 1866) published an able Report on the coal-deposits of the country, in which he divides the Carbonaceous deposits into two classes, the hydrous and anhydrous; the former being similar to the brown-coals of Europe, the latter being referable to the Mesozoic epoch, and more closely resembling "stone-coal."

The results of Dr. Hochstetter's explorations, and those of his companion during their joint survey, are given to the world in a noble work

in which the physical history and structure of the Islands are graphically pourtrayed, together with their natural history.*

*Character and Geological Age of the Coal-deposits.*—The coal-seams of New Zealand are distributed over portions of both the North and South Islands; and they occur in the form of *lignite*, a mineral fuel of inferior quality, and also of *brown-coal*, sometimes in thick beds, and of a quality not inferior to that of the best kinds of the German brown-coal, which is only inferior to English Carboniferous coal. This latter is considered to be of Mesozoic age, probably Jurassic. It is uncertain whether there is any "stone-coal" of Palæozoic age in this country.

*North Island.*—Deposits of brown-coal occur in the Drury and Hunna districts, 20 miles south of the city of Auckland. The vicinity of the capital, and of the Waitemata and Manukan Harbours, with which communication has been established (1862), renders this coal-field very important. The merit of its discovery, in 1858, belongs to the Rev. Mr. Purchas. There is, *at least*, one bed of brown-coal, six feet in thickness, associated with remains of dicotyledonous plants,

* "New Zealand, its Physical Geography," etc. (1863), Stuttgart, translated by E. Sauter (1867).

which leads Dr. Hochstetter to infer its Tertiary age.

Another tract with brown-coal lies on the banks of the Waikato, but is at present unopened; one seam here has a thickness of 15 feet, and lies in a horizontal position along the base of the slate mountain Taupiri.

A coal-formation of probably Mesozoic age has recently been detected in the northern districts of Auckland, in the vicinity of Wangaroa Harbour. A large portion of the isolated hills at the North Cape is composed of this formation. According to Dr. Hector, the bituminous coal of Kawa-Kawa is of a quality superior to that of any other coals of the province.

Besides the above, there are to be found on the shores of Manukan Harbour, in the flats of Drury, Papakura, and Waikato, etc., deposits of *lignite*, which must not be mistaken for brown-coal.

*South Island.*—Of greater variety and extent appear to be the coal-deposits of South Island, which seem destined to be capable of supplying a large portion of the fuel for the steam navigation of the Pacific Ocean. At a distance of four miles S. of the city of Nelson, a colliery has been opened in several seams of *brown-coal*, from 3 to

6 feet in thickness. Still farther south near Mount Arthur, and on the Wangapeka and Batten rivers, coal-seams have also been discovered.

The coal of Massacre, or Coal Bay, W. of Nelson, has been opened to a small extent. The seams lie at the level of high-water mark and below it, in a nearly horizontal position; and the coal has been used for steam navigation purposes.*

The extent of the coal-field near Motupipi is considerable; the coal-seams having been found at various places up the Takaka river for a considerable distance. They belong to the *brown-coal* series, and are imbedded in bituminous shales, sandstones, conglomerates and limestones, such as are frequently met with in Germany.†

The coal-deposits of Pakawau in Golden Bay, appear to be of a different and more ancient date than those just described. The coal is of a firmer consistency and gaseous, but has not yet been found of sufficient thickness to induce extensive mining operations. The extent and resources of this coal-field are as yet little known.

Dr. Haast has made important discoveries of coal in the provinces of Nelson and Canterbury;

* On board the *Nelson* in 1854-5.

† Hochstetter, "New Zealand," p. 84.

especially on the Buller (or Kawatiri), and Grey (or Mawhera) rivers.* On the flanks of the Papahaua range, he discovered a fine bed of coal 8 feet thick at a height of 1,500 feet above the sea, and extending over an estimated area of 8 miles in width by 15 in length.

Of still greater importance are the discoveries on the Grey River entering the sea on the west coast. Here at least four workable seams are known, of which the thickest is 15 feet; they are interbedded with micaceous sandstones and shales, which have yielded dicotyledinous leaves, and remains of Cycads, with *Zamites*, *Pecopteris*, and *Equisetum*. The coal resembles that of Newcastle in Australia, and is little inferior to English coal. The discovery of such valuable beds of coal, so near the coast, has awakened great interest in the colony, and (in 1866) arrangements were being made for the construction of a tramway, and for the opening up of the mines; a great obstacle to success being the attractions offered by the gold-fields. When these have subsided, and the large population betake themselves to

* An analysis of the coal from Nelson at the mouth of the Grey River, by Dr. Percy, gives the following results:—Carbon 79·00, hydrogen 5·35, oxygen 7·71, ash 3·50, water 1·05 per cent., coke 64·32. It is a caking coal, and probably a good gas coal. (Metallurgy, 100.)

other kinds of industry, the coal-resources will doubtless receive due attention.*

The coal-deposits of Pakawan, the Buller, and Grey rivers are considered by Dr. Hochstetter to be of Mesozoic age, and probably the representatives in time of the Yorkshire Oolitic coal in England.

The analysis of the Pakawan coal gives the following results,—carbon 66·72, hydrogen and oxygen 23·18, ash 8·4, water 1·7.†

On the eastern side of the South Island, carbonaceous deposits have also for some years past been known to occur. The Kowai coal-field, about 30 miles from Christchurch in Canterbury, contains several workable seams, in which a coal-mine has been at work since 1857. Deposits of brown-coal are also known to underlie the great Canterbury plains, and crop out in the valleys of the Selwyn and several other rivers, and in the Malvern, Big Ben, Somers Hills.

The province of Otago also contains deposits of *brown-coal* on the southern coast, north from the Molyneux river, where they extend over an

* See Dr. Hector's Report (1866). The grey coal is described as compact, black, dull lustre, with slaty cleavage. The coal puffs up slightly when heated, and gives 68·37 per cent. of coke.

† Herr *v.* Hauer, quoted in Hochstetter's "New Zealand," p. 91.

area of at least 45 square miles, and in which there are several seams of good coal varying from 6 to 20 feet in thickness. Two large mines have been opened in this field, and the coal is used chiefly for the purposes of steam navigation. The same formation occurs in the Green Island and Saddle Hill Basin, where two seams of a thickness of 7 and 9 feet have been worked.

A third tract of the brown-coal formation occurs along the eastern sea-board of Otago, extending inland to the base of the Kakanui Mountains; and other small patches occur at intervals in the interior portions of the province. The same formation is also known to occur in South Land in several places.

With resources in mineral fuel so great, together with those supplies of the useful or precious metals which she is known to possess, New Zealand seems to have all the materials for the foundation of commercial and manufacturing prosperity. And when added to this we take into account the extraordinary fertility of her soil and the sub-tropical character of her climate, her ample supplies of water, ever flowing down from groups of hills in the interior, or ranges of snow-clad mountains, appropriately called "The Southern Alps," and recollect that all these have

been granted by an overruling Providence to the sons of Albion, bringing with them the institutions, the traditions, and the enterprising spirit of the mother country, may we not predict for the "Britain of the South" a great and glorious future?

## AFRICA.

As compared with the other continents of the world, Africa, as far as it is at present known, appears to be remarkably destitute of fossil fuel; nevertheless, the researches of Livingstone have brought to light coal-deposits on the banks of the Zambesi, described by the late Mr. Thornton, geologist to the exploratory expedition. Dr. Livingstone has rightly estimated the beneficial effect upon the future navigation of this great river, likely to be exerted by the existence of these "stones that burn," the term by which the natives designate this mineral.*

The carbonaceous deposits which are known to exist to some extent along the Eastern districts of the Cape of Good Hope have not hitherto proved of much value.

* In Livingstone's second journey, coal was discovered at Tette, on the Zambesi, one seam being 25 feet in thickness.—"Expedition to the Zambesi and its Tributaries," p. 52, 1865.

# CHAPTER IV.

## NORTH AMERICA.

### *British Possessions.*

The States of America not appertaining to the British Crown have retained possession of by far the greater portion of the coal-producing region of the North American continent. In Canada proper, there exists not a vestige of the coal-formation; and the coal-fields within the boundaries of the British Empire are confined to its outlying north-eastern districts of Newfoundland, New Brunswick, and Nova Scotia, and the borders of the Rocky Mountains. These we now proceed to describe.

### NEWFOUNDLAND.

From the survey of Mr. Jukes, it appears that there are two small, and, as far as known, not highly productive, coal-fields in Newfoundland; one extending along the eastern shore of St.

George's Bay, some distance inland, and the other from Grand Pond to White Bay.*

The formation is similar to that of Nova Scotia, consisting of two members which pass into each other. The lower member consists of red sandstone, red and green marls, with gypsum; the upper, of dark shales, fireclays, sandstones, conglomerate and coal. This last has been found in several places, marked on Mr. Jukes' map; the thickest bed being about three feet.

## NEW BRUNSWICK AND NOVA SCOTIA.

The geological structure and mineral resources of this region have been very lucidly described by Dr. Dawson.† From the excellent geological map which accompanies his work, it would appear that nearly one-half of these territories are composed of Carboniferous rocks; but of this less than a third contains productive Coal-measures.

The following is the general succession of the Carboniferous series :—

| | Thickness. |
|---|---|
| 1. *Upper Coal-series.*—Grey and red sandstones and shales, conglomerates, and a few thin beds of limestone and coal of no economic value | 3,000 feet. |

* "Geology of Newfoundland."

† "Acadian Geology."

| | Thickness. |
|---|---|
| 2. *Middle Coal-series.*—Grey and dark sandstones, and shales, etc., with valuable beds of coal and ironstone; beds of bituminous limestone, and numerous underclays with *Stigmaria* . . | 4,000 feet. |
| 3. *Lower Carboniferous or Gypsiferous series.*—Reddish and grey sandstones and shales, overlying conglomerates; thick beds of limestone with marine shells, and of gypsum; more than | 6,000 ,, |

## *Fossil Remains.*

The fossils of the upper series are composed principally of plants, as *Calamites*, *Ferns*, and Coniferous wood.

In the middle series, representing the middle Coal-measures of England, remains of both the animal and vegetable kingdoms appear to be remarkably abundant, and are classed by Dr. Dawson as follows:—

Reptiles.—*Dendrerpeton Acadianum*, discovered by the author and Sir C. Lyell, within the upright trunk of a Sigillaria. *Baphetes planiceps*, a large batrachian allied to Labyrinthodon; besides one or more species indicated by their tracks.

Fishes.—*Palæoniscus*, *Holoptychius*, *Megalichthys*, and several other undetermined genera.

Articulata.—*Cypris* or *Cytherina*, several species. *Spirorbis*, either imbedded or attached to plants.

Mollusca.—*Pupa vetusta*, the first example of a land shell ever found in the Carboniferous rocks. *Modiola*, *Anthracosia* (Unio), of two or more species.

A large number of plants of European genera, and many of European species.

The Lower Carboniferous series, representing all the strata of England, from the Millstone Grit downwards, contains a reptile, discovered by Sir William Logan; fishes of the genera *Holoptychius* and *Palæoniscus*. Of Annelides, *Spirorbis* and *Cytherina;* of Crustaceans, a *Trilobite* or *Limulus;* besides a large series of Mollusca, of the genera *Nautilus*, *Orthoceras*, *Conularia*, *Euomphalus*, *Natica*, *Terebratula*, *Spirifer*, *Productus*, *Cardiomorpha*, *Pecten*, *Avicula*, *Modiola*, *Isocardia*, *Cypricardia:* of Polyzoa, *Fenestella*, *etc.*, Crinoids, etc.; and a few plants.

## CUMBERLAND COAL-FIELD.

This is by far the largest Carboniferous tract, covering an area, according to Professor Rogers, of 6,889 square miles.* It extends along the whole line of coast, and as far inland as the base of a range of mountains which trend along the northern coast of the Bay of Fundy. Its southern limits are the Cobequid Hills. Unfortunately, the surveys of this great coal-field have not tended to raise our expectations of its economic importance, as the greater portion of it appears to be composed of the Lower and

* "Geol. of Pennsylvania," vol. ii.

Upper Carboniferous series, both of which are destitute of valuable coal-beds.

If economically unimportant, it is far otherwise in a scientific point of view, as, along the coast of the Bay of Fundy, at South Joggins, it displays the finest natural section of the Coal-formation in the world. The whole series of this district attains a thickness of 14,570 feet, with 76 seams of coal. Of these, 4,515 feet are brought to light in the coast-section. The beds rise along the face of the cliffs, clean and fresh, to a height of 150 feet, at an angle of 19°; so that, in proceeding along the coast from north to south, for a distance of about ten miles, we arrive at constantly newer beds, which at low tide may be traced out from the base of the cliff for a distance of 200 yards. Sir C. Lyell counted 19 seams of coal, and at least 10 forests of upright stems of Sigillaria, the longest of which was 25 feet, with a diameter of 4 feet where broken off; they were found invariably based on the upper surfaces of the beds of coal.

In the Cumberland coal-field, the principal coal is the "Joggins Main Seam," consisting of two beds, $3\frac{1}{2}$ and $1\frac{1}{2}$ feet thick. There are also workable seams at Springhill, besides several places in New Brunswick, especially a remark-

able pitch-like vein called the "Albert Mine," on the Petitcodiac River.

### COAL-FIELDS OF COLCHESTER AND HANTS.

This district is separated from that of Cumberland by the Cobequid chain of hills, and has an area of about 200 square miles. It is principally valuable for its limestone and gypsum. The coal-seams appear to be all under 18 inches in thickness.

### COAL-FIELD OF PICTOU.

This coal-field has an area of about 350 square miles, and is remarkable for containing two very thick beds of coal, the upper 37 feet, and accompanied by three other workable beds having an aggregate thickness of nearly as much more, separated by 157 feet of strata. These seams have partings of inferior coal and ironstone at intervals. The upper bed has been largely worked at the Albion mines; and though there of good quality, has been proved to deteriorate at a short distance both to the north and south of that locality. Recently, however, according to the statement of Dr. Dawson, an extension of these great beds of coal has been proved over five new

properties, which must contain a workable quantity of 150 millions of tons of good coal; and there is reason for believing that the area is still considerably greater.*

### COAL-FIELDS OF RICHMOND AND CAPE BRETON.

The combined areas of these fields may be estimated at 350 square miles. Several workable seams of coal have already been discovered, besides valuable deposits of limestone and gypsum. For our knowledge of the Sydney coal-field we are particularly indebted to Mr. R. Brown, who gives the following synopsis :—The productive measures cover an area of 250 square miles, with a thickness of about 10,000 feet of strata.† Of several very fine natural sections exposed to view along the coast, the most interesting is that to the north-west of Sydney Harbour, extending a distance of 5,000 yards, and exhibiting a vertical thickness of 1,860 feet of strata. Of these, 34 are coal-seams, combining to produce 37 feet of coal. Four only are workable. The following is the general section of these coals :—

* "Geol. Mag.," February, 1867.

† Journ. Geol. Soc., London, vols. ii. and vi.

| | Feet. | In. |
|---|---|---|
| *Cranberry Head Top Seam* . . . | 3 | 8 |
| Strata . . . . . | 280 | 0 |
| *Lloyd's Cove Seam* . . . . . | 5 | 0 |
| Strata . . . . . | 730 | 0 |
| *Main Seam* . . . . . | 6 | 9 |
| Strata . . . . . | 450 | 0 |
| *Indian Cove Seam* . . . . . | 4 | 8 |

Valuable coal-seams occur also at Lingan and Bridgport; one of which, 9 feet in thickness, yields a fine coke, and is esteemed as a gas-coal. Limestone and gypsum also abound; and, on the whole, the mineral resources of Cape Breton county appear very promising.*

In 1870, the quantity of coal raised in the district was 333,803 tons.

Emigrants and settlers would do well to make themselves acquainted with the mineral resources of the districts in which they propose to settle; as they may thus procure a tract of land which may prove, from its mineral wealth, of benefit to themselves and their descendants.

* Mr. Brown has recently published an important treatise, entitled "The Coal-fields and Coal-trade of Cape Breton," with maps and illustrations (London, 1871), giving very complete information regarding the subject on which it treats, to which the reader is referred for fuller information.

## CHAPTER V.

### STATES OF NORTH AMERICA.

The great hydrographical basin of the Mississippi and its tributaries is underlaid throughout the greater part of its area by productive Coal-measures, with enough coal to supply the whole of that vast continent, were it as populous and as industrious as Britain, for a decade of centuries. This great Carboniferous formation spread originally in one continuous sheet over the whole of Central America, probably from the flanks of the Rocky Mountains to the shores of the North Atlantic, and from the Gulf of Mexico to Newfoundland; and though we are unable strictly to define the original margin and limits of this great coal-generating tract, yet there is reason to believe, as has been pointed out by Sir C. Lyell, that land existed at that period where now rolls the Atlantic; and that the British Islands were connected with America by a chain

of islands, or a tract of land, over which the plants of the Carboniferous period migrated and spread themselves in dense forests. Such an hypothesis seems the most satisfactory explanation of the remarkable fact, that the Carboniferous vegetation of America is identical, at least generically, with that of Europe; which could not have been the case under any of the received theories of the distribution of plants and animals, if these regions had been separated by wide barriers of ocean.

Moreover, in tracing the Carboniferous strata, from Texas and Missouri on the south-west to the Alleghany Mountains and Nova Scotia on the east and north, we find a progressive thickening of the sedimentary materials, such as sandstones and shales, which become both more abundant, and of coarser texture, as we approach the seaboard of the Eastern States. This points to the position of the old land, from which these materials were derived, as having lain somewhere in the North Atlantic; and, combined with the evidence derived from the vegetation, becomes almost demonstrative of the axiom, that what was land is now sea.

The great tract of Coal-measures, which was, without doubt, originally connected throughout,

has now become dissevered into five coal-fields, the areas of which are thus stated by Professor Rogers :*—

| | | |
|---|---|---|
| The Appalachian Basin.—Length, 875 miles ; average breadth, 180 ; area . . . | 55,500 | sq. miles. |
| The Illinois, Indiana, and Kentucky Basins. —Length, 370 ; breadth, 200 ; area . | 51,100 | ,, |
| The Missouri and Arkansas Basins.—Length, 550 ; breadth, 200 ; area . . . | 73,913 | ,, |
| The Michigan Basin.—Length, 160 ; breadth, 125 ; area . . . . . | 13,350 | ,, |
| The Texas Basin.—Length, 160 ; area . | 3,000 | ,, |
| Total area . . . . | 196,863 | ,, |

Over the central and western districts, the strata lie regularly, and only slightly removed from the horizontal position; but on proceeding eastwards, and approaching the chain of the Alleghanies, they become bent ; and ultimately folded and crumpled along lines parallel to the axis of the mountains. Corresponding with this folding of the beds, the coals lose their bituminous properties, and along the western flanks of the mountains occur only as anthracite. The close connection between the crumpling of the coal-seams, and the loss of the volatile constitu-

* "Geol. of Pennsylvania." The reader would do well to refer to the small but very beautiful map of M. Jules Marcou, in Peterman's "Mittheilungen," vol. vi., 1855.

ents of the coal itself, is strongly marked ; for in proportion as we recede from the axis of disturbance, the coal-seams become more bituminous.

The Alleghany Hills consist of a succession of parallel ridges, divided by narrow and deep valleys, corresponding to the folding of the strata. The axis is nearly parallel with the coast of the Atlantic, and reaches at Black Mountain an elevation of 6,476 feet. The geological structure of this remarkable range leads to the conclusion that it has been formed by the exertion of lateral pressure, acting along the Atlantic side, and forcing the strata towards the west, with a power to which geology affords few parallels. In consequence of the structure of the beds, and the subsequent partial denudation, these mountains contain several small trough-shaped coal-fields, in which the coal has become metamorphosed, and assumes a columnar structure, the axes of the columns being perpendicular to the planes of bedding. There are also springs of pitch and petroleum,* of great value; and

* An account of the discovery and opening of one of these oil-springs at the village of Cuba, in Alleghany County, appeared in the *New York Tribune*, of 8th January, 1861. When a pipe had been driven down 25 feet, the oil ascended with such force as to fill a barrel in an hour. Sometimes it was mixed with water. (*See* Appendix.)

others of brine, containing 10 per cent. of common salt (chloride of sodium), and small quantities of iodine and bromine. Free carburetted hydrogen also bursts forth at the fountains of the country.*

The thickness of some of the coal-seams is in keeping with the vastness of the coal-fields. In consequence of the thinning away of the sedimentary materials westward, several seams are often brought into contact, and form one mass. Thus in the Bear Mountains there has been formed a seam of 40 feet in thickness, which is described by Sir C. Lyell. It is anthracite, and is quarried from the outcrop into the hill. Sir Charles considers that the thickness of the original mass of vegetable matter, before condensation of pressure, and the discharge of its various gases, may have been from 200 to 300 feet!

The Coal-measures, as in England, rest upon a floor of Carboniferous Limestone, with, in some places, Millstone Grit intervening; the age of the coal-fields in both countries is therefore identical. The fossils of the Carboniferous Limestone are generically the same with those of

* Professor Rogers. (From a communication to the British Association, 1860.)

Europe—such as *Spirifer*, *Orthis*, *Terebratula*, *Productus*, *Pentremites*, and *Retepora*.

The plants from the Coal-measures are *Lepidodendron elegans*, *Sigillaria Sillimani*, *Neuropteris cordata*, *N. Loshii*, *Pecopteris lonchitica*, *Calamites Cistii*, *etc.*, of which all but the second occur in Europe.

*The Jurassic Coal-field of Richmond, Virginia.*

Some miles east of Richmond a small coal-field of 26 miles from north to south, and 12 in its greatest diameter, occupies a depression in the granitic rocks of that part of the country. This coal-field has been shown by Professor Rogers and Sir C. Lyell to be of an age contemporaneous with the Oolitic coal-field of Whitby in Yorkshire, and the plants *Equisetum columnare* and *Pecopteris Whitbyensis* are abundant in both places.

The Richmond coal-field contains several beds of valuable coal, one of which is from 30 to 40 feet in thickness, highly bituminous, and equal to the best coal of Newcastle.

*Other Coal-fields and Lignite Formations.*

In Colorado and New Mexico, Dr. Hayden and his assistants of the Government Survey

report the existence of enormous quantities of coal associated with iron-ore, especially along the base of the Raton hills and Placiere mountains.*

Coal-fields of smaller extent and uncertain age occur, according to M. Marcou, at the sources of the Rio Colorado, in the Utah territory, and on the shores of the Pacific Ocean north of Cape Blanco.†

In Vancouver Island, and on the opposite coast of America, there are extensive deposits of Tertiary and Cretaceous age, bearing beds of lignite and coal, which are extensively worked for the supply of the steamers navigating between Victoria and the Frazer River.‡ Of this coal, that obtained from Nansimo is admitted to be the best.

Mr. Isbister describes extensive lignite deposits in the valley of the Mackenzie River, probably of the same geological age as those in Vancouver Island. These strata have been traced by Sir J. Richardson from the shores of the Arctic Sea, along the eastern base of the

* Report U. S. Survey, 1869.

† "Geologische Karte der Vereingten Staaten," in Peterman's "Mittheilungen," 1855.

‡ Mr. Bauerman, "Journ. Geol. Soc.," vol. xvi., p. 201.

Rocky Mountains as far south as lat. 52°. The beds of lignite attain a thickness of 9 feet, and are well shown where the Bear Island River flows into the Mackenzie.

Dr. J. Hector, who accompanied Captain J. Palliser's expedition in 1857-60, has determined the Geological age of the lignites of North-western America and Vancouver Island to be Cretaceous, though others of inferior quality and of Tertiary age also exist.

The following is a section of the Lignite group obtained by Dr. Hector on the bank of the Saskatchewan River, near Fort Edmonton:*—

1. Superficial sand and gravel.
2. Grey sandy clay.
3. Lignite—1 foot thick.
4. Shale.
5. Lignite—2 feet.
6. Clay and sandstone.
7. Lignite, very pure, 3 feet.
8. Concretionary greensand.
9. Lignite, pure and compact, 6 feet thick, with a band of soap-clay, 6 inches thick.

This bottom bed of lignite was analysed by Mr. Tookey at the Laboratory in the Museum of

* For a very interesting account of the Coal-fields of the North Pacific Coast, see Mr. Robert Brown's communication to the Edin. Geol. Soc., 1868-9.

Practical Geology, and was found to contain about 16 per cent. of ash. Very thick beds of lignite have also been observed on the banks of the Red Deer River, a tributary of the Saskatchewan. On the importance to British commerce of the coal deposits in British territory on both sides of the Rocky Mountains, Dr. Hector lays just stress, showing that they offer a certain inducement towards a route to China and the East by Canada, the Saskatchewan, and British Columbia.

*California.*—In this auriferous region extensive beds of coal are known to occur, of good quality, at Monte Diabolo, within five or six miles of San Francisco, which is connected with the city by rail. Coal and lignite occur also on Jameson Land, Banks' Land, and Melville Island. In Albert Land, in lat. 78°, Sir E. Belcher found bituminous schists with coal, and apparently connected with these strata, limestones with *Productus* and *Spirifer*.

*Coal-fields of the North Pacific Coast.**—Mr. R. Brown, F.R.G.S., who has had extensive

* For a very interesting account of the coal-fields of the North Pacific Coast, the reader is referred to the communication of Mr. Robert Brown, laid before the Geological Society of Edinburgh, 1868-9.

opportunities of investigation, states that these coal-fields, three in number, extend from the borders of Alaska to California, and belong respectively to the Tertiary, Secondary, and Palæozoic ages; the last being situated in Queen Charlotte's Islands, off the northern coast of British Columbia, yields anthracite. The Secondary beds are confined to the Island of Vancouver, and they may be a continuation of the Cretaceous strata of Missouri; while the Tertiary coal-fields extend from California Northward, and through Oregon and Washington Territory, touching the Southern end of Vancouver Island and British Columbia. The following analysis of the native and imported coals ma prove interesting :—

TABLE OF ANALYSES OF NATIVE AND IMPORTED COALS OF THE NORTH PACIFIC (100 PARTS).

| | Locality or Name of Coal. | Specific Gravity. | Carbon. | Hydrogen. | Nitrogen. | Sulphur. | Oxygen. | Per Centage of Coke. | Ash. | Remarks. |
|---|---|---|---|---|---|---|---|---|---|---|
| Native Coals Imported Cretaceous. | Welsh (Craigola) ... | 1·30 | 84·87 | 3·84 | 0·41 | 0·45 | 7·19 | 85·5 | 3·24 | |
| | Newcastle (Cans Hartley) .. | 1·25 | 79·83 | 5·11 | 1·17 | 0·82 | 7·86 | 60·63 | 5·2 | |
| | Scotch (Fordel Splint) ... ... | 1·25 | 79·58 | 5·50 | 1·13 | 1·46 | 8·33 | 52·03 | 4·00 | |
| | Borneo (Labuan) ... ... | 1·28 | 64·52 | 5·74 | 0·80 | 1·45 | 20·75 | ... | 7·74 | |
| | Chili (Conception Bay) ... ... | 1·29 | 70·55 | 5·76 | 0·95 | 1·98 | 13·24 | 43·63 | 7·52 | |
| | Sydney ... .. ... ... | ... | 82·39 | 5·32 | 1·23 | 0·70 | 8·32 | ... | 2·04 | |
| | Pennsylvanian Anthracite ... | ... | 90·45 | 2·43 | ... | ... | ... | ... | 4·67 | S. and N. 2·45. |
| Native Coals Tertiary. | Nanaimo (V. I.) ... ... ... | 1·24 | 66·93 | 5·32 | 1·02 | 2·20 | 8·70 | ... | 15·83 | |
| | Koskeemo (V. I.) ... ... | 1·32 | 66·15 | 4·70 | 1·25 | 0·80 | 13·50 | ... | 13·60 | Average specimens. |
| | Bellingham Bay (W. T.) ... | ... | 47·63 | ... | ... | ... | ... | ... | 2·15 | Bitumen, 50·22. |
| | Clallam Bay (W. T.) ... ... | ... | 46·40 | ... | ... | ... | ... | ... | 2·63 | Vol. matter, 50·97. |
| | Coose Bay (Ogn.) ... ... | ... | 46·54 | ... | ... | ... | ... | 49·73 | 3·19 | Vol. matter, 50·27. |
| | Monte Diabalo Cal. ... ... | ... | 50.00 | ... | ... | ... | ... | ... | 4·00 | Vol. bit. matter, 46. |
| Native Coals Anthracite. | Queen Charlotte Islands ... | 1·46 | 71·20 | ... | ... | ... | ... | ... | 6·43 | Moisture, 5·10. Vol. comb. matter, 7·27. |

In Disco Island, and the adjoining coast of Greenland, in lat. 70°, beds of coal accompanied by plant-remains were brought home by Sir F. L. M'Clintock, and subsequently by Mr. Whymper. These plant-remains, on being submitted for examination to Professor Heer, of Zurich, were pronounced by him to be referable to the miocene stage of the Tertiary period.*

### TRINIDAD.

This Island has long been celebrated for its lake of mineral pitch; but, besides this, it contains beds of coal and lignite, likely to become of considerable economic importance. The very successful survey by Messrs. Wall and Sawkins, the Report of which has been published,† puts us in possession of all that is at present known. The strata with which the beds of coal are associated belong to the Tertiary period, and are very widely distributed. In the middle of the island there is a thickness of 6ft. 10in. of workable coal, in two beds; and in the southern section, double that amount in three beds. The

* Heer's "Flora Fossilis Antarctica," also the "Geol. Mag.," July, 1869.

† "Report on the Geology of Trinidad," Mem. Geol. Survey, 1860, with maps and sections.

strata, consisting of shales, sands, and carbonaceous clays, which contain these coal-seams, reach a total thickness of about 2,000 feet. They range across the island in parallel zones, and present interesting sections along the coast, very faithful details of which are presented by Mr. Wall. The asphalt is almost invariably disseminated in the newer Parian group, which contains the beds of lignite and a large amount of vegetable matter. It is considered by Mr. Wall to be the result of chemical reaction, conducted under the ordinary temperature of the island, producing bituminous, in place of ordinary anthraxiferous, substances. The bitumen thus developed is exuded at the surface; and where a natural hollow occurs forms a lake.

The same Tertiary formations, under the term "Newer Parian," have been traced by Mr. Wall on the neighbouring coast of the Continent, and are known to contain lignite and coal at Piaco on the Orinoco, and in the provinces of Barcelona and Coro. Mineral pitch is also found in these strata.*

It is proper to observe that these Tertiary lignites are inferior in economic value to the coal

* Mr. Wall, Journ. Geol. Soc., vol. xvi.

of the true Carboniferous formations of Europe and North America; and so long as these latter are shipped in sufficient quantity into the West Indian Islands, the fossil fuel of Trinidad is not likely to be largely worked.*

* In 1859, no less than 99,100 tons of coal were shipped into the British West Indies from Great Britain.

## CHAPTER VI.

### COAL-FIELDS OF SOUTH AMERICA.

*Empire of Brazil.* — The Province of Rio Grande do Sul, at the southern extremity of this great empire, is now known to be exceedingly rich in mineral fuel. According to the observations of Mr. N. Plant,* there are three distinct coal-basins contained within the limits of lat. 30° and 32° S., long. 51° and 54° W., and are separated from each other by rolling hills of granite and schist, with trachytic and basaltic rocks. The largest of these basins occupies the valleys of the Jaguarao and Candiota, and the strata consisting of sandstone at the top, and shale, coal, and limestone below, dip southward at an angle of 10° to 15°.

The following section is exposed in the escarpment of the Sierra Partida, in this basin, as given

* Geol. Mag., No. 58 (April, 1869).

by Mr. N. Plant, F.G.S.; the beds in descending order:—

| | | Ft. | In. |
|---|---|---|---|
| No. 1. | Ferruginous sandstone . . | 25 | 0 |
| „ 2. | Shale (coaly) . . . . | 9 | 0 |
| „ 3. | Sandy shale . . . . | 5 | 0 |
| „ 4. | *Coal* . . . . . | 3 | 0 |
| „ 5. | White shale with plants . . | 5 | 0 |
| „ 6. | *Coal* . . . . . | 11 | 0 |
| „ 7. | Parting of blue clay . . . | 2 | 0 |
| „ 8. | *Coal* . . . . . | 17 | 0 |
| „ 9. | Shale with fossils . . . | 9 | 0 |
| „ 10. | *Coal* . . . . . | 25 | 0 |
| „ 11. | Shales with ironstone and ferns, resting on sandstone. | | |

The second basin lies in the valley of the São Sepe, one of the tributaries of the river Jacuahy, in about lat. 30° 20′, long. 53° 30′. Two distinct beds of coal, one 7 feet, and the other 14 feet thick, appear in this locality, underlying sandstone, apparently the same as that which overlies the coal of the Candiota valley.

The third basin is near the town of São Jeronymo, on the banks of the Jacuahy, lat. 30°, long. 51° 30′. Here the coal has been for some time extensively worked by Mr. J. Johnson. The sections of the strata show deposits similar to those of Candiota. At a depth of 19 yards is a bed of bituminous coal 6 feet thick, below which are others interstratified with shales and ironstone.

Carboniferous deposits also occur in the province of Santa Catherina. About 45 miles N.W. of the seaport of Lagana, the basin is intersected by the river Tubarao and its tributaries. In this basin, five seams from 18 inches to 10 feet have been met with, underlying a sandstone formation.

*Banda Oriental*, or *Uruguay*.—The coal-bearing formation of Southern Brazil is continued into this Republic, and the succession of the beds is stated by Mr. Plant to be similar to that above described. Along the head waters of the Rio Negro beds of shale and coal are overlaid by a thick deposit of sandstone.*

*Geological Age of the South Brazilian Coal-formation*.—A special interest attaches to these deposits, as they appear to belong to the true Carboniferous period of North America and Britain, which is thus represented south of the equator by a parity of coal-bearing rocks. The plant remains obtained by Mr. Plant from the shales associated with the coal-seams of Candiota, were submitted to Mr. W. Carruthers, F.R.S., of the British Museum, who has been able to determine three species, and to recognise more vaguely a

* Geol. Mag., April, 1869 (150).

number of other forms, all of which belong to Palæozoic genera, while the species occur in the Coal-measures of Great Britain. The genera observed are *Flemingites* (Carr.), *Odontopteris*, and *Nœggerathia*.*

The existence of these deposits of mineral fuel is calculated to be a source of considerable wealth to a portion of the empire, whose enlightened ruler is ever ready to advance the interests of science, and to extend the social and commercial prosperity of his people.

*Chile*.—Tertiary strata, containing beds of "brown-coal," are found along the coast of Chile, forming several little detached basins, and resting on a basis of metamorphic schists and intrusive rocks.† The most important district is that lying between Concepcion and Valdivia, which contains the two largest collieries of the country, those of Coronel Puchoco and Lota; from which the best coal is derived.

According to the report of Mr. Bollaert, the Lota coal is largely used in the steam-navigation

* Geol. Mag., April, 1869, 151-6 (with plate).

† We have accounts of these strata by Mr. C. Darwin, "Geological Observations in S. America," 1864; by Mr. W. Bollaert, "Observ. on the Coal-formation of Chile," Journ. R. Geog. Soc., xxv., 172; and by Messrs. G. A. Lebour and W. Mundle, Geol. Mag., vol. vii., 499 (1870).

of the Chilian coast, as also in copper-smelting, iron-foundries, and for domestic purposes. The Lota coal-field is estimated to contain 40 millions of tons, and the Coronel, double that quantity.

A detailed section of the coal-series at Coronel is given by Mr. W. Mundle, throughout a depth of 587 feet, which shows a series of sandstones and shales, with 9 seams of coal, or lignite, some of which are workable. The eighth seam from the top, nearly 5 feet in thickness, is described as a "very good, hard, and clean coal," which, however, it ought to be remarked, is inferior in quality to true Carboniferous coal of Britain or America. The following are the analyses of these coals :—

| | Talcahuano (Admiralty) | Lota Dr. Playfair. | Lota (first seam). Mr. Abel. |
|---|---|---|---|
| Ash | 6·92 | 5·68 | 2·05 |
| Carbon | 70·71 | 78·30 | 83·70 |
| Hydrogen | 6·44 | 5·30 | 1·02 |
| Oxygen | | 8·37 | |
| Sulphur | 15·93 | 1·06 | 13·23 |
| Nitrogen | | 1·09 | |
| | 100·00 | 100·00 | 100·00 |

On the age of these beds some difference of opinion exists; along with representatives of Tertiary genera, such as *Voluta*, *Bulla*, etc., there are Cretaceous genera, such as *Ammonites*

(fragments of one specimen), and *Baculites*. On this ground, M. A. D'Orbigny has contended for the Cretaceous age of these carbonaceous deposits, while Mr. C. Darwin thinks it to be one "verging on the commencement of the Tertiary era."

Mr. Bollaert states that coal, similar to that of Chile, has been observed along the Straits of Magellan, and indications of it 30 miles south of Valparaiso.*

* *Supra cit.*, p. 175.

# CHAPTER VII.

## ANNUAL PRODUCTION OF COAL IN VARIOUS COUNTRIES.

| | Tons. |
|---|---|
| Great Britain and Ireland (1870) [1] | 110,431,192 |
| America—United States (1865) [2] | 14,593,659 |
| ,, British Possessions [3] | 1,500,000 |
| France (1870) [4] | 6,550,000 |
| Belgium (1862) [5] | 10,350,000 |
| German Zollverein States (1870) [6] | 23,316,238 |
| Austrian Empire (1862) [7] | 4,552,500 |
| Italy (1862) | 775,000 |
| Spain (1862) [8] | 388,950 |
| Russia (1862) [9] | 150,000 |
| Poland (1862) [10] | 112,500 |
| British India (1868) [11] | 564,933 |
| Japan, China, Borneo, Australia (estimated) | 3,000,000 |
| Mexico (1870) | 1,000,000 |
| Chile (1870) | 1,000,000 |

[1] "Mineral Statistics," by Mr. R. Hunt, F.R.S. (1870).

[2] Mr. R. Hunt.

[3] Estimated.

[4] "Situation de l'Industrie Huillère" (Paris).

[6] Zeitschrift f. das Berg-Hutten, 1870.

[5] [7] [8] [9] [10] Herren Köttig und Hartig, "Die Steinkohlen Deuchlands" (1865).

[11] Dr. Oldham, Memoirs of the Geological Survey of India, vol. vii.

Germany also produces considerable quantities of brown-coal, returned at 6,116,521 tons in 1870. The quantities above stated being such as were accessible to the author, though not always the latest returns, will serve to show the relative proportions of mineral fuel raised in foreign countries. Since the dates to which they refer, the quantities have probably increased from 10 to 20 per cent., and in a few years hence the out-put from some countries above named will, doubtless, be doubled.

The annual increase in the production of coal since the year 1854, is nearly three millions of tons. I do not go farther back, because it is doubtful whether much reliance is to be placed on estimates advanced by several authorities earlier than that year, when the "Mineral Statistics" of Great Britain, collected by Mr. R. Hunt, were published. The following are the estimates obtained through this source; and it will be observed that the increase is by no means uniform :—

*Coal-produce of Great Britain*, 1854—70.

| | | Tons. |
|---|---|---|
| 1854. | England and Wales . . . . . | 57,064,651 |
| | Scotland . . . . . | 7,448,000 |
| | Ireland . . . . . | 148,750 |
| | Total . . . . . | 64,661,401 |

| | | Tons. |
|---|---|---|
| 1855. | England and Wales | 56,983,450 |
| | Scotland | 7,325,000 |
| | Ireland | 144,620 |
| | Total | 64,453,070 |
| 1856. | England and Wales | 59,008,815 |
| | Scotland | 7,500,000 |
| | Ireland | 136,635 |
| | Total | 66,645,450 |
| 1857. | England and Wales | 57,062,604 |
| | Scotland | 8,211,472 |
| | Ireland | 102,630 |
| | Total | 65,376,706 |
| 1858. | England and Wales | 57,062,604 |
| | Scotland | 8,926,249 |
| | Ireland | 120,750 |
| | Total | 66,109,603 |
| 1859. | England and Wales | 61,559,465 |
| | Scotland | 10,300,000 |
| | Ireland | 120,300 |
| | Total | 71,979,765 |
| 1860. | England, Wales, Ireland | 73,142,198 |
| | Scotland | 10,900,500 |
| | Total | 84,042,698 |
| 1861. | England and Wales | 75,203,871 |
| | Scotland | 11,081,000 |
| | Ireland | 123,070 |
| | Total | 86,419,941 |
| 1862. | England and Wales | 70,434,838 |
| | Scotland | 11,076,000 |
| | Ireland | 127,500 |
| | Total | 81,638,338 |

| | | Tons. |
|---|---|---|
| 1863. | England and Wales | 75,064,665 |
| | Scotland | 11,100,500 |
| | Ireland | 127,050 |
| | Total | 86,292,215 |
| 1864. | England and Wales | 80,262,873 |
| | Scotland | 12,400,000 |
| | Ireland | 125,000 |
| | Total | 92,787,873 |
| 1865. | England and Wales | 85,377,087 |
| | Scotland | 12,650,000 |
| | Ireland | 123,500 |
| | Total | 98,150,587 |
| 1866. | England and Wales | 88,881,794 |
| | Scotland | 12,748,750 |
| | Ireland | 123,750 |
| | Total | 101,754,294 |
| 1867. | England and Wales | 90,249,437 |
| | Scotland | 14,125,943 |
| | Ireland | 125,000 |
| | Total | 104,500,480 |
| 1868. | England and Wales | 88,304,148 |
| | Scotland | 14,709,959 |
| | Ireland | 126,950 |
| | Total | 103,141,157 |
| 1869. | England and Wales | 92,882,384 |
| | Scotland | 14,417,150 |
| | Ireland | 127,923 |
| | Total | 107,427,557 |

| | | Tons. |
|---|---|---|
| 1870. | England and Wales | 95,355,169 |
| | Scotland | 14,934,553 |
| | Ireland | 141,470 |
| | Total | 110,431,192 |

The following is a summary of the coal-produce of the British coal-fields for 1870, according to the returns collected by Mr. Hunt:*—

*Coal-produce of the United Kingdom*—1870.

| | Tons. |
|---|---|
| Durham and Northumberland | 27,613,539 |
| Cumberland | 1,408,235 |
| Yorkshire | 10,606,604 |
| Derbyshire | 5,102,265 |
| Nottinghamshire | 2,115,372 |
| Warwickshire | 647,540 |
| Leicestershire | 599,450 |
| Staffordshire and Worcestershire | 13,230,062 |
| Lancashire | 13,810,600 |
| Cheshire | 929,150 |
| Shropshire | 1,343,300 |
| Gloucestershire and Somersetshire | 1,955,910 |
| Monmouthshire | 4,364,342 |
| South Wales | 9,299,770 |
| North Wales | 2,329,030 |
| Scotland | 14,934,553 |
| Ireland | 141,470 |
| Total | 110,431,192 |

Number of Collieries, 2,851.

The export of British coal to foreign parts is

* Mineral Statistics of the United Kingdom for 1870, Mem. Geol. Survey, by Mr. R. Hunt, F.R.S.

very large, being over ten millions of tons annually. The Commissioners consider, with reference to this item of expenditure of our coal, that it is not likely to materially increase, as the foreign drain must ultimately be met by the development of the coal-fields which are distributed over so large a portion of the earth's surface, including those of India, China, Australia and New Zealand, and North and South America.*.

* Report of the Royal Coal-Commission, vol. i.

# PART IV.

## CHAPTER I.

### AN INQUIRY INTO THE PHYSICAL LIMITS OF DEEP COAL-MINING.

The reader will have observed that the limit of depth adopted in the estimates of the workable quantity of coal in the individual coal-fields and adjoining districts has been 4,000 feet, notwithstanding that there are hundreds of square miles stored with coal at greater depths than this, which have been estimated by the Royal Commissioners to amount to no less than 48,465 millions of tons.* Now, it so happens that this limit of 4,000 feet, which I adopted in 1860, on grounds stated in the first and second editions of this work, has also been adopted by the Royal Commissioners, as the greatest depth to which

* The quantity obtained by adding the amount of 7,342,000,000 tons included in the known coal-fields, to 41,144,000,000 tons in districts overspread by newer formations.—Report, vol. i., pp. ix. and xvii.

mining operations are ever likely to extend. This concurrence of views on a subject bearing so directly upon the question of the exhaustion of our coal-resources is gratifying to myself, and will probably be regarded by the public at large as a ground of confidence in the conclusions arrived at by me and the Commissioners.

The two main impediments to the prosecution of mining operations at great depths are the increase of temperature in the strata themselves, and of the pressure due to the weight of the strata; but as the latter obstacle is capable of being overcome in most cases, especially under the "long-wall system" of mining, it may be omitted from consideration;* and we may concentrate our observations on the subject of the increase of temperature alone.

That the temperature of the earth's crust increases as we descend from the surface, is a question which has been determined in the affirmative by observations extending over a large portion of the land-surface itself. It is, however, to be observed, that, compared to the radius of the earth, these observations reach only a very

* The Report of the Coal-Commission scarcely alludes to this subject, and it is probable that the Commissioners did not consider it necessary seriously to entertain it.

small depth; nevertheless, they are perfectly sufficient for determining the problem, as far as it is calculated to influence the question of deep mining; and, in order to put the reader in possession of the evidence as derived from direct observation, the following cases of special interest may be here cited:—

The first of these is the experiment at the Puits de Grenelle, near Paris, the particulars of which are stated by Arago and Humboldt.* The water ascends from the Greensand formation, which outcrops at Lusigny, south-east of Paris. The depth of the well from the surface is 1,903 English feet, and 1,675 feet below the level of the sea. The temperature of the spring is 81·95 Fahr., and the rate of increase is 1° F. for every 58·9 English feet.

At Neu-Saltzwerk, in Westphalia, a boring was commenced at a height of 232 feet above the level of the sea, and it reached an absolute depth of 2,285 feet. Its temperature is 91° 04′ Fahr., and as the mean annual temperature of the air at Neu-Saltzwerk is about 49° 28′ Fahr., we may

* "Cosmos," Sabine's Trans., vol. iv., p. 35.—See also Mr. W. Hopkins' Essay in the Philosophical Transactions, vol. cxlvii. This eminent authority considered the increase of temperature at an average of 1° F. for every 60 feet, as having been satisfactorily established.

infer an increase of temperature of 1° for 54·72 English feet, or 1° Cent. for 92·4 Paris feet.

The boring of the well at Neu-Saltzwerk, as compared with that of Grenelle, has a greater absolute depth by 491 French, or 491 English feet, and a greater relative depth below the level of the sea of 354 French, or 377 English feet; and the temperature of its water is 5° 1′ Cent., or 9° 18′ Fahr. higher. The rate of increase of temperature in the shallower well at Paris is nearly 1-14 less rapid than in the deeper well at Neu-Saltzwerk. This observation is important, as it is sometimes supposed that the rate of increase diminishes in a constant ratio as the depth increases.

Near Geneva, an artesian boring to a depth of 724 English feet, gave an increase of 1° Fahr. for every 55 feet. The locality is at an elevation of 1,600 feet above the level of the sea.

At Mondorff, in the Grand Duchy of Luxemburg, an artesian boring, of great interest, owing to the number of formations through which it penetrated, gave a result of 1° Fahr. for every 57 feet. The details were as follows :—

| | Metres. |
|---|---|
| Lias . . . . . | 54·11 |
| Keuper (Red Marls, etc.) . . . . | 206·02 |
| Muschelkalk (Limestone) . . . . | 142·17 |
| Grès bigarré (Sandstone) . . . . | 311·46 |
| Old schistose rocks . . . . . | 16·24 |
| Total . . . . . | 730·00 |

An extensive series of experiments carried on in the mines of Cornwall, by Mr. R. Were Fox,* has induced that gentleman to arrive at the conclusion that the increase of temperature progresses in a diminishing ratio, and Mr. R. Hunt adopts a similar view, founded on observations in the same district. Difficult as it is to conceive, and far more to account for, such a result, which would appear to show that as we approach the source of the heat the heat itself decreases, yet it cannot be denied that the results obtained by these observers (if taken by themselves) seem to favour the conclusions at which they have arrived. The following is a synopsis of Mr. Fox's experiments:—

A temperature of 60° at 59 fathoms below the surface.
,, 70° at 132 ,, ,,
,, 80° at 239 ,, ,,

* Report, British Association, vol. ix.

Being an increase of—

| | | | |
|---|---|---|---|
| 10° at | 59 fathoms | deep, | or 1° in 35·4 feet |
| of 10° at | 73 ,, | deeper, | or 1° in 43·8 ,, |
| and of 10° at | 114 ,, | still deeper, | or 1° in 64·2 ,, |

The deepest observations were taken in the Tresavean mine in 1837, at the following depths :—

| | | |
|---|---|---|
| 262 fathoms . . . | 1,572 feet . | 82·5° |
| 290 ,, . . . | 1,740 ,, . | 85·3° |
| Same depth in another lode . | . . | 86·3° |
| ,, in a third lode . | . . | 92·1° |
| Mean temperature for 1,740 feet . | | 87·9 |

Mr. Hunt has found the temperature as high as 100° at a depth of 320 fathoms in this mine.

Allowing due weight to opinions coming from these observers, I cannot accept as of universal application an hypothesis of the increase of temperature in a diminishing ratio. It does not appear to be in harmony with the results obtained on the Continent, where the increase of temperature in the deeper well of Neu-Saltzwerk is 1-14 more rapid than in the shallower well of Grenelle. Nor can it be reconciled with the observations in Dukinfield Colliery (about to be given in detail), where the increase in the uppermost strata, down to 270 yards, is 1° for 88 feet, and in the lowest down to 685 yards, 1° for 65·6 feet.

Professor Phillips has made observations on the temperature at the Monkwearmouth Colliery, which have shown an increase of about 1° for every 60 feet.

*Dukinfield Colliery.*—The experiments lately carried out by Mr. Astley, during the progress of sinking the Dukinfield Colliery, are perhaps the most valuable of any hitherto undertaken in this country. Through the kindness of Dr. Fairbairn, of Manchester, I have been supplied with the whole of the details, which I here insert at length. The observations were conducted with great care. The thermometer was inserted in a dry bore-hole, and removed as far as possible from the influence of the air in the shaft, and left in its bed for a length of time, varying from half an hour to two hours. The results also carry with them more than usual importance, from the fact that they extend downwards to a depth of 2,055 feet, with an additional observation made in the open workings, at 120 yards from the shaft, and at a depth of 2,151 feet.

THERMOMETRICAL OBSERVATIONS IN THE DUKINFIELD COLLIERY, CHESHIRE, BETWEEN 1848 AND 1859.*

| Date. | Depth in Yards. | Temperature Fahr. | Description of Stratum. |
|---|---|---|---|
| 1848. | | | |
| July 28th ... | 5·6 | 51° | Red rock—no variation. |
| 1849. | | | |
| 1st | 231 | 57·7 | Blue shale—wet |
| 12th | 234·7 | 58 | ditto dry hole |
| 16th | 237 | 58 | ditto ditto |
| July 14th | 239 | 57·5 | |
| „ 16th | 240 | 58 | ditto ditto |
| „ 27th | 242 | 57·5 | ditto ditto |
| August 9th | 244 | 58 | ditto ditto |
| „ 25th | 248 | 58 | ditto water |
| „ 27th | 248 | 57·25 | ditto ditto |
| „ 31st | 250 | 57·25 | ditto ditto |
| November 14th | 252 | 58 | |
| December 6th | 256·5 | 58 | Blue shale—dry |
| „ 15th | 262·5 | 58·5 | ditto ditto |
| „ 22nd | 270 | 58 | Bituminous shale—dry |
| 1850. | | | |
| January 9th | 279 | 58·5 | Strong warrant earth |
| „ 26th | 286·5 | 59·12 | Rock bands |
| February 11th | 293 | 59·5 | Coal roof |
| „ 19th | 300 | 59·87 | Warrant earth |
| March 5th | 309 | 59·87 | Purple mottled shale |
| 1851. | | | |
| June 9th | 358 | 62·5 | Warrant earth |
| August 14th | 373 | 64 | Tender blue shale |
| November 7th | 403 | 65 | Coal roof |
| „ 19th | 419 | 65·37 | Rock bands |
| 1852. | | | |
| February 6th | 433 | 66·5 | Black shale |
| May 28th | 446 | 67 | Strong fire-clay |
| 1857. | | | |
| February 28th | 483·5 | 67·25 | Sandstone—dry hole |
| March 7th | 487 | 67·76 | Shale |
| April 11th | 501 | 68·5 | Sandstone |
| May 6th | 511·5 | 68·75 | Blue shale |
| „ 19th | 521·5 | 69·38 | Strong shale |
| June 9th | 533 | 69·75 | Warrant earth |
| „ 22nd | 539 | 69·88 | Blue shale |
| „ 27th | 546 | 71·75 | Coal and earth |
| July 18th | 555 | 71·25 | Grey sandstone |

* These observations are published by Dr. Fairbairn, F.R.S., in the Report of the British Association for 1861.

THERMOMETRICAL OBSERVATIONS, ETC.—(*Continued.*)

| Date. | Depth in Yards. | Temperature Fahr. | Description of Stratum. |
|---|---|---|---|
| 1857. | | | |
| August 1st | 563 | 72·25 | Red rock (Sandstone) |
| „ 15th | 569 | 71·25 | ditto wet hole |
| September 2nd | 578 | 72·12 | ditto ditto |
| „ 19th | 589 | 71·5 | ditto ditto |
| October 3rd | 597 | 72·25 | Grey rock—dry hole |
| „ 17th | 608 | 72·25 | Coal roof—wet hole |
| „ 27th | 613·5 | 72·25 | Coal floor ditto |
| 1858. | | | |
| March 22nd | 621 | 72 | Strong shale—dry |
| „ 29th | 627 | 71·5 | Dark-blue shale |
| April 23rd | 645·5 | 72·25 | Shale—dry hole |
| May 1st | 651 | 72·25 | ditto ditto |
| „ 19th | 658 | 72·5 | ditto ditto |
| June 9th | 669 | 73·25 | Bituminous shale—dry hole |
| „ 19th | 673 | 74·12 | Grey rock |
| July 17th | 683 | 75·25 | Blue shale |
| „ 21st | 685 | 75·5 | do. do. |
| 1859. | | | |
| March 5th* | 717 | 75·0 | "Black Mine" Coal roof |

1. The first observation gives 51° as the invariable temperature throughout the year at a depth of 17 feet.† Between 231 yards and 270 yards, the temperature was nearly uniform at 58·0, and the increase from the surface would be at the rate of 1° F. for 88 feet.

* In workings at 120 yards down engine incline from the shaft.

† This observation for the position of the invariable stratum is probably not reliable. The depth ought to be greater, but its accurate determination requires a series of observations which could not well have been made in the present instance.

2. Between 270 and 309 yards, the increase was at the rate of 1° for 62·4 feet.

3. Between 309 and 419 yards, the increase was at the rate of 1° for 60 feet.

4. Between 419 and 613 yards, the increase was at the rate of 1° for 86·91 feet.

5. Between 613 and 685 yards, the increase was at the rate of 1° for 65·6 feet.

6. The last observation, taken in the mine itself, at 120 yards from the pit, is valuable, as showing that the temperature of the air does not greatly differ from that of the surrounding strata.

The result of the whole series of observations (making allowance for the doubt regarding the first observation) gives an increase of about 1° for every 80 feet, which is a less rapid increase than that exhibited by the generality of experiments. But before discussing the cause of this abnormally slow rate of increase I wish the reader to become acquainted with the experiments of not less interest and value made at another colliery near Wigan, and extending to a still greater depth.

*Rose Bridge Colliery, Wigan.*—The following observations in the temperature of the strata during the progress of sinking the pits of Rose Bridge Colliery, at Ince, near Wigan, now the

deepest mine in Britain, have been communicated to the author by Mr. Bryham, the manager, by whom they were carried out. They differ materially from those of Dukinfield just described.*

THERMOMETRICAL OBSERVATIONS AT ROSE BRIDGE COLLIERY.

| Date. | Depth, in Yards. | Strata. | Temperature in open pit. | Temperature in solid strata. |
|---|---|---|---|---|
| | | | ° F. | ° F. |
| July 1854 ... ... | 161 | Blue shale ... ... | ... | 64·5 |
| August 1854 ... | 188 | Warrant earth ... | ... | 66 |
| May 1858 ... ... | 550 | Blue shale ... ... | ... | 78 |
| July 1858 ... ... | 600 | Warrant earth ... | ... | 80 |
| May 18, 1868 ... | 630 | "Raven" coal ... | 73 | 83 |
| July 24, 1868 ... | 665 | Strong shale ... | 75 | 85 |
| April 19, 1869 ... | 673 | "Yard Coal" mine ... | 76 | 86 |
| November 18, 1868 | 700 | Strong blue metal ... | 76 | 87 |
| February 22, 1869 | 736 | Do. | 76 | 88½ |
| March 12, 1869 ... | 748 | Shale... ... ... | 77 | 89 |
| April 17, 1869 ... | 762 | Linn and wool, or strong shale ... | 78 | 90·5 |
| May 3, 1869 ... | 774 | Strong shale... ... | 80 | 91·5 |
| May 19, 1869 ... | 782 | Blue metal .. ... | 79 | 92 |
| July 8, 1869 ... | 801 | Strong blue shale ... | 79 | 93 |
| July 16, 1869 ... | 808 | Coal (Arley mine) ... | 79 | 93½ |

Assuming the surface temperature to be 49°, we have on the whole depth of 815 yards, or 2,445 feet, an increase of 45°, which is at the rate of ·0184 of a degree per foot, or one degree for

* These observations, with a complete section of the strata to a depth of 815 yards from the surface, are given in the "Third Report of the Committee on Underground Temperature," Rep. Brit. Assoc., 1870.

every 54·3 feet, as against one degree for every 80 feet at Dukinfield.

*Cause of difference in rate of increase.*—With strata so nearly similar, and in two neighbouring counties, we should scarcely have expected so much difference in the mean rates of increase downwards. In this respect, Rose Bridge agrees nearly with the average results obtained elsewhere; Dukinfield far surpasses all other deep mines or wells, so far as our present records extend, in slowness of increase.*

In a paper published in the Proceedings of the Royal Society of London, I have endeavoured to show that the cause of the discrepancy in the results obtained at the two localities is due to the differences in the position of the strata in each case. At Rose Bridge the beds are nearly horizontal, at Dukinfield they are inclined at an angle varying from 30° to 35°, rising and cropping out to the eastward. Now, strata of various kinds, such as alternating sandstones, shales, clays, and coal, with different conducting powers, must offer more resistance to the transmission of heat in a direction across, than parallel to, their planes of bedding; for Mr. Hopkins has

* *Ibid*, p. 32.

shown, that every sudden change of material is equivalent to an increase of resistance; and it is obvious that highly-inclined strata, such as those at Dukinfield, furnish a path by which internal heat can travel obliquely upwards and outwards, without being interrupted by these breaches of continuity. On the other hand, deep-seated horizontal strata, like those of Rose Bridge, offer a succession of resisting surfaces to the upward passage of internal heat.

As, therefore, the rate of increase of temperature is inversely proportional to the upward flow of the heat, we have here a solution of the results arrived at in the cases before us.* To this may be added, that inclined strata furnish great facilities for the convection of heat by the flow of water along the planes of junction.

The general inference which may be drawn from the cases just described, as far as they bear upon the temperature of coal-mines, is this: that in those districts where the strata are highly inclined (at angles varying from 30°—60°), the underground temperature will be less than in the case of those where the strata are in a position approaching the horizontal.

* Proc. Royal Society, 1870, vol. xviii., p. 175.

*Mean Result.* — The illustrations already adduced will probably be considered sufficient to show that the increase of temperature is a reality, which becomes a sensible obstacle at a slightly variable depth; and will have to be encountered and overcome by artificial means when the depth exceeds 800 or 900 yards. On this point the Commissioners on Coal-resources have arrived at the conclusion that at a depth of 1,000 yards (3,000 feet) the temperature of the earth would amount to 98°. Under "the long-wall system" of working, a difference of about 7° appears to exist between the temperature of the air and that of the working faces, and this difference represents a further depth of 420 feet; so that the depth at which the temperature of the air would, under the present conditions, become equal to the heat of the blood, would be about 3,420 feet. Beyond this point the considerations affecting increase of depth become so speculative, that the Commissioners leave them in uncertainty; but they consider it may be fairly assumed that a depth of at least 4,000 feet may ultimately be reached in coal-mining.*

In reviewing the evidence laid before them by

* Report, vol. i., p. 88.

several gentlemen of experience, the Commissioners have come to the conclusion that the rate of increase may, for ordinary cases, be assumed to be 1° F. for every 60 feet. From this mean result there will be variations, as in the case of Dukinfield and Rose Bridge; one of which gives a less rapid, the other a more rapid, rate of increase. Assuming, however, the rate as above stated, it is necessary to determine the temperature to which the addition of 1° for 60 feet is to be made, in order to calculate the temperature at different depths; in other words, the position of the "*invariable stratum*."

Now, it has been found that at a certain depth, varying from 30 to 50 feet, the temperature remains the same all the year round; and is nearly that of the mean annual temperature of the air. The depth of this "invariable stratum," according to Humboldt, depends upon the latitude of the place (increasing from the equator towards the poles), on the conducting power of the rock, and on the amount of difference between the temperatures of the hottest and coldest seasons. At Greenwich, the mean temperature is 49·5°; and in the deepest of several underground thermometers, 25 feet from the surface, the extreme variations were (1858) from

48·85° to 52·27°, giving a mean of 50·56°—a result, differing by only half a degree from that of Dukinfield Colliery, obtained ten years earlier.*

We may therefore adopt 50·5° as the standard of departure—or in other words the *temperature of no variation* at a depth of 50 feet underground.

But there is an additional element tending to raise the heat in deep mines; namely, the increased density of the air. The effect of this will be greatest when the air is stagnant; but when there is a rapid circulation of the air-current it will probably be small, and may be disregarded.†

The following Table gives the maximum temperature at the various depths according to the average rate of 1° Fahr. for 60 feet :—

*Table showing theoretical increase of Temperature.*

| Depth in Feet. | Increase of Temperature due to depth. | Depth in Feet. | Increase of Temperature due to depth. |
|---|---|---|---|
| 1,000 | 63·0° F. | 2,750 | 95·5° F. |
| 1,500 | 73·8 | 3,000 | 99·6 |
| 1,750 | 78·8 | 3,250 | 103·8 |
| 2,000 | 82·0 | 3,500 | 108·0 |
| 2,250 | 87·1 | 3,750 | 112·1 |
| 2,500 | 91·3 | 4,000 | 116·3 |

* "Greenwich Observations" for 1858.

† This element has not been noticed by the Commissioners, though I drew attention to it in the second edition of this work.

From the above Table it will be observed, that at a depth of 3,000 feet the temperature of the strata exceeds that of blood heat, and that were it not for the effects of ventilation in reducing the temperature, the limits of coal-mining would be circumscribed within this depth.

*Ventilation.*—To effective ventilation, however, we must look for ability to win those seams which lie within the additional thousand feet of strata, and as to what extent this is likely to be accomplished we have already some valuable evidence. In reference to the effect of the heated walls of the rock on the ventilating air-current, the Commissioners remark as follows :*—When cool air enters a heated mine it absorbs heat from the surfaces of the passages through which it flows, and the rate of this absorption somewhat exceeds the ratio of the difference between the temperature of the air and that of the surrounding surface with which it is in contact. By the absorption which thus takes place the air is heated, and this heating process is

From this I infer that the Commissioners did not consider the increased density of the air in a well-ventilated mine as calculated materially to increase the temperature.

* Report, vol. i., p. 82 (Committee A, of which Sir W. C. Armstrong, C.B., was chairman).

most rapid at first, when the difference of temperature is greatest, and gradually diminishes as the length of the passage is extended, never ceasing until complete assimilation of the temperature is effected. The progress towards assimilation is more rapid when the air comes in contact with the working face of the coal, which, from being newly exposed, is more highly heated than the surfaces of the permanent air courses. The rapidity, however, with which the air takes up the heat from the working face depends in a great degree upon the system of working. In the cellular system, called "pillar and stall," the air seems to acquire almost immediately the full temperature of the coal; but under the "long-wall" system there are instances of the air retaining a considerable inferiority of temperature after sweeping past the working face.

*Temperature of Air-current.*—The experiments made by Mr. Bryham, the Manager of Rose Bridge Colliery, near Wigan, for the purpose of determining the rate of increase of temperature of the air-current while flowing through the passages of a deep mine, are of much interest. They are taken at the respective depths of 300 and 600 yards, and at different periods of the year, and are as follows:—

OBSERVATIONS ON TEMPERATURES OF AIR CURRENTS, ETC., AT ROSE BRIDGE COLLIERY, WIGAN.

Temperature at Surface in Shade, 56°.

| Date. | Depth in Yards. | Air current. Cubic ft. per min. | Temperature of intake air. | Temperature of return air. | Gain of heat. | Distance travelled by the current. |
|---|---|---|---|---|---|---|
| 1860. Sept. 4th | 300 | 35·00 | 59·5 | 64·0 | 5·5 | 1,000 yards |
| „ | ... | ... | ... | 68·0 | 8·5 | 4 yards out of air-current |
| „ | 600 | 81·76 | 60·5 | 73·0 | 12·5 | 1,500 yards |
| „ | ... | ... | ... | 75·0 | 15·0 | 8 yards out of current |

Temperature at Surface in Shade, 42°.

| | | | | | | |
|---|---|---|---|---|---|---|
| 1861. Mar. 18th | 600 | 105·58 | 50·75 | ... | ... | Main intake. |
| „ | ... | 96·40 | ... | 68·75 | 18·0 | Taken in Dumb Drift; distance travelled 2,200 yards |
| „ | ... | 23·26 | 51·5 | 67·5 | 16·0 | Distance travelled, 2,400 yards. |
| „ | ... | 31·50 | 51·0 | ... | ... | |
| „ | ... | 21·00 | ... | 71·0 | 20·0 | Distance travelled, 3,140 yards. |
| „ | ... | 10·50 | ... | 67·5 | 16·5 | Distance travelled, 1,900 yards. |
| „ | ... | ... | 60·0 | ... | ... | 4 yards out of main intake air. |
| „ | ... | ... | ... | 71·75 | 11·75 | 4 yards out of main return air. |

Barometer in Cannel Mine (600 yards) 30·5, at surface 28·8.

The above experiments bring out many points of interest. 1. We cannot but be struck with the enormous amount of caloric continually being

carried off from the mine. Thus, in one of the experiments, it is shown that at a depth of 600 yards, a current of air equal to 21 cubic feet per minute, passes off from the mine 20° warmer than it entered, after circulating through 3,140 yards. 2. It will be observed that the surface temperature, depending upon the season of the year, materially affects the temperature of the whole mine; and, if the extreme temperatures of summer and winter had been observed, the results would doubtless have been proportionate. Thus, with a surface temperature of 56°, the return air is 73° with 1,500 yards of circulation, while with a surface temperature of 42°, the return air is only 67·5° with 1,900 yards. 3. The increase of heat received by the air while passing down the shaft appears to be considerable. Thus in a depth of 300 yards the increase was $59{\cdot}5 - 56 = 3{\cdot}5°$, and in a depth of 600 yards the increase was $60{\cdot}5 - 56 = 4{\cdot}5°$ in September, and $50{\cdot}75 - 42 = 8{\cdot}75$ in March. Lastly: Several observations show how powerful is the air-current in moderating the temperature; for, whenever the thermometer was placed beyond its influence, the mercury immediately ascended. All these points bear directly upon the question of deep mining.

*Effects of the Seasons.*—It might have been supposed that the influence of the comparatively colder air of winter and warmer air of summer would be felt throughout the workings of a coal-mine, but the Commissioners have come to a different conclusion upon the evidence offered them on this subject. All the witnesses examined agreed in stating that summer and winter make no difference in the temperature of the air in mines, except at short distances from the shaft. This is due to the fact, that great disparity of temperature is rapidly reduced when the air comes in contact with the air passages: thus, very cold air upon entering the mine rapidly absorbs the heat of the strata, and the greater the difference of temperature the more rapid is the absorption. I am, therefore, induced to abandon an opinion which I formerly held, that air at a low winter temperature might be, in some cases, rendered available for mines which in the summer months might become unworkable.

*Effect of the increased circulation of Air-current.*—On this subject the evidence offered chiefly by Mr. Lindsay Wood, of Hetton Hall; Mr. J. J. Atkinson, of Chilton Moor; and Mr. John Knowles, of Pendlebury; has tended to show that little change of temperature is effected

by increasing the circulation of the air in the passages of the mine. From the tabulated statement given in the report, it appears that in one case observed at Hetton Collieries, when the distance from the shaft was from 2,296 to 2,925 yards, the difference between temperature of the strata and of the air was only 2°, while the volume of air in circulation was 22,400 cubic feet in one case, and 11,400 in another.

Mr. Wood has shown by a table the gradual approximation of the temperature of the air to that of the strata through a distance of 3,422 yards; and he found that at that distance no perceptible difference took place in the temperature of the current when reduced from 41,800 cubic feet to 3,000 per minute.

*Effect of Humidity or Dryness of the Air.*—The question of the maximum temperature of air which is compatible with healthful labour is an exceedingly difficult one to determine, and the Commissioners had evidence laid before them showing that in some cases human labour had been carried on at temperatures as high as 180° Fahr.; but it was observed, that in these cases the thermometer indicated radiant heat, and not that of the surrounding air. Upon one question, however, the witnesses were unanimous,

that a high temperature was endurable very much in proportion to the dryness of the air ; while, on the other hand, where it was saturated with moisture, the same degree of temperature became intolerable.

Now, it is a matter of general observation, that in deep mines the air is comparatively dry. The water, which is generally present, often in large quantities, in shallow mines gradually lessens in quantity as we descend, and at depths of 500 or 600 yards ceases altogether. The air, therefore, which circulates through the passages of deep mines gradually parts with its moisture while it rises in temperature, and passes into a state agreeable to the human system, and conducive to health. The hygrometric condition of the air in deep mines may, therefore, be regarded as in some measure tending to counterbalance the effects of a high temperature, and to render possible healthful labour at great depths from the surface.

The following Table of observations on this subject are of much interest, and are extracted from the Report of the Royal Commissioners :—

No. 1.—Summary of Hygrometric Observations in Coal Mines in the County of Durham.

| Name of Mine. | Place of Observation. | Depth in Feet. | Distance from Downcast Shaft, in Yds. | Dry Bulb. | Wet Bulb. | Relative Humidity, 100° being Saturation. |
|---|---|---|---|---|---|---|
| Jane Pit, Eppleton Colliery ... ... | A working face. | 1,395 | 4,332 | 73°5 | 73°5 | 100·0 |
| | ,, | 1,395 | 4,440 | 74·0 | 74·0 | 100·0 |
| | ,, | 1,395 | 4,560 | 74·5 | 74·5 | 100·0 |
| Caroline Pit, Eppleton Colliery ... ... | ,, | 838 | 2,560 | 64·0 | 64·0 | 100·0 |
| | ,, | 1,040 | 3,364 | 65·5 | 65·0 | 97·2 |
| | ,, | 1,012 | 3,328 | 65·5 | 65·0 | 97·2 |
| | ,, | 1,030 | 3,365 | 65·0 | 65·0 | 100·0 |
| Lady Pit, Elemore Colliery ... ... | ,, | 970 | 1,866 | 67·5 | 67·5 | 100·0 |
| | ,, | 930 | 2,660 | 66·0 | 66·0 | 100·0 |
| | ,, | 88 | 3,454 | 65·0 | 64·5 | 97·2 |
| Wharton Colliery ... | ,, | 900 | 4,246 | 64·5 | 64·0 | 97·2 |
| | ,, | 924 | 3,696 | 68·0 | 67·0 | 94·7 |
| | ,, | 1,254 | 1,826 | 71·75 | 70·0 | 91·0 |
| Monkwearmouth Colliery ... ... | ,, | 1,646 | 3,256 | 81·25 | 79·5 | 92·0 |
| | ,, | 1,640 | 3,216 | 82·25 | 81·25 | 95·6 |
| Ryhope Colliery... .. | ,, | 1,560 | 2,762 | 73·0 | 71·0 | 90·2* |
| Murton Colliery ... ... | ,, | 1,374 | 4,532 | 70·0 | 69·5 | 97·4 |
| Monkwearmouth, 2nd observations ... | ,, | 1,646 | 3,256 | 81·0 | 78·0 | 86·8† |
| | ,, | 1,640 | 3,216 | 81·0 | 78·0 | 86·8 |
| Monkwearmouth Colliery, 3rd observations ... | ,, | 1,646 | 3,256 | 81·0 | 74·0 | 70·4‡ |
| | ,, | 1,640 | 3,216 | 81·0¼ | 77·0 | 80·6 |
| Seaham Colliery ... ... | ,, | 1,995 | 2.200 | 78·0 | 76·0 | 60·3 |

* Under the sea. † These observations were taken by Mr. L. Wood and Mr. Dickinson conjointly.
‡ It is the practice in this colliery to water the roads to keep down the dust, but this practice had been suspended for eleven days immediately preceding this 3rd set of observations.

No. 2.—Summary of Hygrometric Observations in Coal Mines in Lancashire, North Wales, Cheshire, Staffordshire, and Yorkshire.

| Name of Mine. | Place of Observation. | Depth in Feet. | Distance from Downcast Shaft. | Dry Bulb. | Wet Bulb. | Relative Humidity, 100° being Saturation. |
|---|---|---|---|---|---|---|
| | | | Yards. | ° | ° | |
| Rose Bridge Colliery ... | End face of a level | 2,391 | 69 | 71·0 | 64·5 | 68·3 |
| | Do. | 2,391 | 103 | 72·5 | 65·5 | 66·8 |
| | Do. | 2,391 | 303 | 75·0 | 68·0 | 68·1 |
| Pendleton Colliery ... | A working face | 2,064 | 1,747 | 81·0 | 73·0 | 66·5 |
| | Do. | 2,214 | 727 | 77·0 | 69·0 | 64·8 |
| Astley Pit, Dukinfield Colliery ... ... | Do. | 2,216 | 590 | 73·0 | 69·0 | 80·7 |
| Astley and Tylesdale Colliery ... ... | Face of level | 1,200 | 2,035 | 69·0 | 69·0 | 100·0 |
| Bank Colliery ... ... | A working face | 900 | 120 | 68·0 | 67·0 | 94·7 |
| Low Side Colliery ... | Do. | 492 | 586 | 60·0 | 60·0 | 100·0 |
| Anderton Hall Colliery... | Face of level | 900 | 600 | 63·0 | 62·0 | 94·3 |
| Bradleyfold Colliery ... | A working face | 540 | 1,520 | 70·0 | 69·0 | 94·8 |
| Wynnstay Colliery, North Wales ... ... ... | Do. | 1,173 | 611 | 67·0 | 66·0 | 94·6 |
| Hafod Colliery, North Wales ... ... ... | Do. | 1,815 | 195 | 75·0 | 73·0 | 90·4 |
| | Do. | 1,452 | 390 | 72·0 | 70·0 | 90·0 |
| Clifton Hall Colliery ... | Do. | 1,640 | 1,262 | 69·0 | 63·0 | 70·0 |

*Remarks.*—In the Tables from which this Summary is compiled the depth is stated in yards, and the distance travelled by the air computed from the mouth of the shaft. To facilitate comparison with the Durham observations, the depth is here expressed in feet, and the distance travelled is taken from the bottom of the shaft.

*Effects of Pressure.*—It is impossible to speak with certainty of the effect of the accumulative weight of 3,000 or 4,000 feet of strata on mining operations. In all probability, one effect would be to increase the density of the coal itself, and of its accompanying strata, and so to increase the difficulty of excavating. Coal-mining labours under a disadvantage not felt in mining other minerals, namely, the impossibility in general of having recourse to blasting. The increased firmness of the strata will most assuredly be felt; but the question whether its resistance will prove beyond the powers of manual skill and mechanical contrivances to surmount, can only be solved by actual experience. I am informed by Mr. Bryham, that from his experience the density of coal-seams is not perceptibly greater at 500 or 600 yards than at half that depth; at the same time, in Dukinfield Colliery, where the Black Mine is now being worked at a depth of about 2,500 feet, the pressure is so resistless as to crush in circular arches of brick four feet in thickness, and in one case, a pillar of cast iron 12 inches square, supporting a roof of only seven feet in extent was snapt in twain !*

* As I was informed by Mr. Seddon, the underlooker.

In the face of these two obstacles—temperature and pressure, ever increasing with the depth—I have considered it utopian to include in calculations having reference to coal-supply, any quantity, however considerable, which lies at a greater depth than 4,000 feet. Beyond that depth, I do not believe it will be found practicable to penetrate. Nature rises up and presents insurmountable barriers.

## CHAPTER II.

### THE DURATION OF OUR COAL-SUPPLY.

When in 1860 I attempted to calculate the quantity of British coal, and arrived at the conclusion that there were 79,843 millions of tons, down to a depth of 4,000 feet, I was able to assure the public that there was sufficient coal to last, at the rate of production for that year, for one thousand years. Ten years later the Royal Commissioners, appointed under an Act of Parliament, by a division of labour, and with facilities which no private individual could command, made another and more detailed series of estimates, and returned the quantity at nearly double the amount arrived at by myself within the same limit of depth, namely, 146,480 millions of tons. The discrepancy in the two results being chiefly due (1) to the Commissioners having included in their calculation coal-seams between one and two feet in thickness, purposely omitted by

myself; (2) to the Commissioners having made a smaller deduction for waste and loss in the working of the coal; and (3) to the Commissioners having boldly estimated the quantities under certain districts overspread by formations newer than the Carboniferous, which I hesitated to deal with, not because I doubted the existence of the coal there, but from a fear of overstating the case. With the course adopted by the Commissioners in the two last cases, I now fully concur; but I still object to the comprehension of seams under 24 inches in thickness in estimates of the available quantities at great depths.

The propriety, or the contrary, of this course on the part of the Commissioners does not, however, very materially affect the question of the coal-resources of Britain and the duration of our coal-supply; and it must be satisfactory to the nation at large to be assured of the existence of such vast quantities of mineral fuel reserved for future use on the authority of eminent men, who gratuitously undertook the laborious task confided to them by their Queen and country.

*Annual Increase of Consumption of Coal.*—With reference, however, to the question of the duration of our coal-supply, the Commissioners cautiously avoid giving a definite answer, for the

excellent reason, that it is a question to which a definite answer cannot be given. We know, indeed, the extent of our resources in millions of tons, but we know not the extent of the future drain upon these resources. The drain upon our coal-fields, however, is increasing year by year, and will doubtless continue to increase for a long time to come. This is due to several causes; let us examine a few of them.

1. The present consumption of coal for domestic use has been estimated by Mr. Robert Hunt, at one ton per head of the whole population, and may be assumed to absorb nearly one-third of the entire quantity raised from the mines. It is thought probable by the Commissioners that this rate will continue pretty constant; and the future increase of consumption under this head may, therefore, be expected to coincide with the increase of population.

Now, although the population of the island is annually increasing, yet it has been ascertained that the increase is taking place at a diminishing rate; for between the years 1811 and 1821 the increase was 16 per cent., while during the last decade, between 1861 and 1871, the increase was only at the rate of 11·75 per cent.

But while the population is increasing in a

diminishing ratio, the rate of increase of coal consumption—though irregular, on an average of the increase of the last 14 years, amounts to nearly 3 per cent. per annum. This increase is attributable chiefly to two causes: first, the town population, which represents the chief coal consuming portion, is increasing in a far more rapid ratio than the population of the kingdom generally; and secondly, the extension of machinery and the improvements for encouraging labour, cause the consumption of coal for productive purposes to be constantly increasing in relation to the number of persons employed in manufactures.*

Professor Jevons, who has written a most important work on the duration of our coal supply,† has shown that every improvement for the economising of labour has resulted in increasing the consumption of coal; and he contends, that coal being the source of power, and being required for every great extension of industry, the consumption of it must keep pace with the progress of population, and the extension of manufactures

* Report of the Coal-Commissioners, vol. i., xv. In 1855, the amount of coal consumed per head of the population was only 2 tons 14 cwts., while in 1869 it amounted to 3 tons, 17 cwts., 1 qr.

† "The Coal Question," by W. Stanley Jevons (1865).

and industrial pursuits. Applying his views to the future consumption of coal, he anticipated in 1865, that in the present year (1871) the consumption would be found to amount to 118,000,000 tons, as against 83,500,000 tons in 1861. Now, in 1870, the quantity consumed was 110,431,192 tons, and taking the yearly rate of the increase at three millions of tons, the amount for the present year (1871) will be upwards of one hundred and thirteen millions of tons, falling short of Mr. Jevons' estimate by five millions of tons. The rate of increase has, therefore, proved rather less rapid than estimated by Mr. Jevons.

On the other hand, Mr. Price Williams, whose views are quoted by the Commissioners,* is of opinion that the present rapid increase in the annual production of coal is mainly in consequence of the equally rapid and abnormal development of our commercial activity, which has followed the introduction of steam power into this country; and that the effect of this initial increase in the annual yield of coal is still perceptible; just as it is in a minor degree, in the present rate of increase of our population; and he concludes that the rate of increase of

* *Ibid*, p. xv.

coal used *per head* of the population follows a diminishing ratio analogous to that shown by the curve of population.*

On the basis of these diminishing ratios, Mr. Price Williams has calculated that the annual consumption at the end of a hundred years would amount to 274 millions of tons, and that the total quantity of available coal would only last for 360 years.

Upon the basis of an arithmetical increase of three millions of tons per annum (the increase of the last 14 years), the consumption at the end of a hundred years would be 415 millions of tons, and the estimated available quantity would be only sufficient to last for 276 years.

Both these views, however, labour under the defect that they do not take into account the diminishing ratio at which coal must be consumed, when it becomes scarcer and expensive. The abrupt exhaustion of our coal-fields is an impossibility; and if it is to take place at all, it can only be by a slow and gradual process—concomitant with a complete, let us hope a higher and nobler, re-organization of society.

*Waste in Combustion.*—Coal of all kinds is

* Report, vol. i., p. xv.

now becoming of such value, that the reprehensible waste in using it, which some years ago was common and notorious, is gradually becoming a thing of the past; and the constant effort of manufacturers, and those engaged in the smelting of metallic ores, is directed towards reducing the expenditure of fuel to a minimum. All, however, which is possible in this direction has not yet been effected; but the amount of saving is not to be expected to be very considerable under this head, and the Commissioners report,* that in some branches of manufacture the limits of a beneficial economy appear to have been nearly reached, and that in other cases a gradual effort will continue to be made for saving fuel.

The smelting of iron presents the most remarkable illustration of the extent to which fuel is now being economised as compared with former times. At the Clyde iron-works in 1796, according to the account of Mr. Mushet, no less than 9 tons, 10 cwts., and 24 lbs. of coal were consumed for the production of one ton of pig iron. The quantity of coal now consumed has been reduced to 1 ton, 14 cwts., 2 qrs. with the hot blast, or

* Report, vol. i., p. 93.

2 tons, 3 qrs. of coke. In the Cleveland district, where the expenditure of fuel has been reduced to a minimum, the quantity of coal and coke combined amounts to 33 cwts. 1 qr. to the ton of pig iron.

*Waste in Working.*—It is, on the other hand, much to be regretted that the report of the Commissioners on this head is not of so favourable a character as on the former. It appears that notwithstanding considerable improvement in the general system of coal-mining, and the application of small coal, or slack, to useful purposes, that still "coal is wasted by bad working and by carelessness, and that to a very considerable amount in proportion to the quantity actually used."*

At present, under favourable systems of working, the ordinary and unavoidable loss is about 10 per cent., whilst in a large number of instances, when the system of working practised is not suited to the peculiarities of the seams, the ordinary waste and loss amount to sometimes as much as 40 per cent., of which the chief cause is the crushing of the pillars left under the "pillar-and-stall" system of mining. There are also other sources of waste pointed out by the Com-

* Report, vol. i., p. 116.

missioners which come under the head of *avoidable*. Thus, properties in themselves too small for a separate colliery, or a small estate traversed by a large fault, and, in consequence, passed by during working of the adjoining coal, is often swamped or has its coal crushed. Coal is often left unworked through the contention amongst adjoining owners as to which of them should pump the water; of this South Staffordshire affords an unhappy example. Barriers are left round small properties, or crooked boundaries, whereas a properly laid out barrier could be more economical. Lastly, large tracts of coal of uncertain area are left as barriers against the influx of water, in the absence of reliable plans showing the extent of the coal that has been worked; and main faults, which should serve as natural barriers, are often recklessly cut through and the coal on the other side thereby flooded.

The Commissioners are not prepared to recommend the interference of Parliament in order to deal with these sources of waste by special enactment; but few will be disposed to deny that a certain amount of moral responsibility attaches to those who thus wilfully or negligently waste the national resources.

*The Remedy*.—The cause of much of the waste

arises from the defective system of mining in consequence of the ignorance of many of the mine managers both of the theory and practice of their profession. In some districts, without doubt, coal-mining is even now carried on with a high degree of skill; and in Lancashire, for instance, the amount of waste has been reduced to a very small proportion of the quantity extracted. But in other districts it is frequently very different, and it must be acknowledged that mine managers are, as a class, without much education, and ignorant of those theoretical principles upon which practice ought to be founded.

It, therefore, becomes a matter for consideration, whether the Legislature should not establish some educational test, without which no person should be permitted to have the supervision of a colliery, as far as the actual working arrangements. The schools of mining which have been founded in various districts offer suitable opportunities for the necessary training, as also some of the educational establishments under the Science and Art Department; but, unless the compulsory principle be introduced, experience has shown that the advantages offered by such institutions will not be fully seized by the mining population.

# PART V.

## CHAPTER I.

### PHYSICAL GEOLOGY OF THE CARBONIFEROUS ROCKS.

*South-Easterly Attenuation of the Coal-Measures of the North of England.*—The original manner of distribution of the Carboniferous Rocks is one of much interest to the physical geologist, while the investigation possesses a certain economic importance. The exact information which the extension of the Geological Surveys over the centre and north of England has afforded, enables us to arrive at definite conclusions on this subject.

Having on former occasions gone very fully into the details,* I shall here content myself

* In my paper "On the Thickness of the Carboniferous Rocks of the Pendle Hills, etc.," Journ. Geol. Soc. Lond., vol. xxiv., p 319 (1868).

with showing that a comparison of a series of sections of the Coal-measures and Millstone series, taken from North Lancashire into Leicestershire and Warwickshire, show, that along this line the strata undergo a most remarkable amount of attenuation; showing that they have been deposited according to a definite plan, depending on certain physical relations, and distribution of land and sea during the Carboniferous period. The following comparative sections will render this apparent:—

*Comparative Vertical Sections of Carboniferous Strata.**

| | Burnley District, North Lancashire. N.N.W. | Mottram District, East Cheshire. | North Staffordshire. | Leicestershire and Warwickshire. S.S.E. |
|---|---|---|---|---|
| Coal-Measures ... | 8,460 | 7,630 | 6,000 | 3,000 |
| Millstone grit series | 5,500 | 2,500 | 500 | 100 to 300 |
| Yoredale series ... | 4,670 | 2,000 | 2,300 | |
| Total in feet ... | 18,630 | 12,130 | 8,800 | 3,100 to 3,300 |

From the above comparative sections it will be observed that the beds which attain so grand a development in North Lancashire, have dwindled down to nearly one-sixth of their volume in Leicestershire, in proximity to the concealed Silurian bank, already described.

* *Ibid*, p. 322. In the case of the Burnley section, where the Coal-measures have been partially denuded, the section has been restored on the basis of that of South Lancashire.

A comparison of the combined thickness of coal in the several coal-fields also shows that to a great degree it undergoes a similar loss in thickness along the same tract of country; and as the occurrence of coal-seams in the Millstone grit proves that there was a land-surface approximating to a sea-level, the subsidence of this region during the coal-period must have amounted to several thousand feet vertical;* the vertical distance between the lowest and highest coal-seam showing approximately the actual amount of subsidence.

In the South of England, on the other hand, the Coal-measures were deposited in greatest force toward the W.S.W., and become attenuated in an E.N.E. direction, as shown by a comparison of the sections in Glamorganshire and the Forest of Dean, which lay in original proximity to the southern slopes of the Silurian bank, which stretched from Salop and Worcestershire into the eastern counties.†

* See observations of Sir C. Lyell on this head. "Students' Manual of Geology," edit. 1871, p. 378.

† See pp. 463, *et seq.*

## CHAPTER II.

### BRITISH PHYSICAL GEOLOGY.

*Origin of Coal-Basins.*—The British coal-fields now form a series of basins, some partially concealed by the sea, or by the overspread of newer formations; sometimes visible all round their margins.

The visible coal-basins are: 1. South Wales; 2. Forest of Dean; 3. Burnley; 4. Ayrshire; 5. the Clyde Basin; 6. Mid Lothian; 7. Tipperary and Kilkenny; 8. Leitrim (Connaught coal-field).

The partly concealed basins are: 1. Somerset-shire; 2. the Midland Basin, of which the Denbighshire, Shrewsbury, South Staffordshire, Warwickshire, Leicestershire, and North Staf-fordshire coal-fields form the marginal outcrop, and of which the northern margin is concealed; 3. the South Lancashire and Cheshire Basin, of which the coal-fields of South Lancashire, Flint-

shire, and Cheshire form the marginal limits, the southern margin being concealed; 4. the Yorkshire, Denbighshire, and Notts. Basin, of which the eastern margin is concealed; 5. the Northumberland and Durham Basin, of which the eastern and southern margins are concealed; and, 6. the Cumberland Basin, of which the eastern and western margins are concealed. In Ireland, the coal-basin of Tyrone. The limits of these several basins are indicated on the general map of the coal-fields which accompanies this volume.

*Basins not so formed originally.*—It must not be supposed, however, that this basin-shaped arrangement of the upper Carboniferous strata was the original form in which the coal-fields were deposited, like so many lakes filled with sediment and surrounded by hilly banks and barriers. Such an idea would be altogether erroneous. The basin-shaped structure is in every instance due to terrestrial movements acting along two systems of lines, accompanied and followed by denudation.

*Original Distribution of Coal-measures.*—In order to follow the exceedingly interesting series of changes which have resulted in forming the British coal-basins, we shall first endeavour to

ascertain to what extent, and along what limits, the Coal-measures were originally distributed. This is represented on the accompanying map, which shows, that originally the coal-area of Britain was distributed in two large tracts, one to the north, the other to the south of a band of country, stretching from North Wales, through Shropshire and Worcestershire, into the eastern counties. The Highlands of Scotland formed the limit to the northward for British Coal-measures, while the Highlands of Donegal, Mayo, and Galway formed the limit of the Irish Coal-measures. Through these great sheets of Carboniferous rocks the Cumberland mountains and a little of the Southern Uplands of Scotland protruded; while in Ireland the mountains of Wicklow and of Slieve Croob were also uncovered; but with these exceptions, we have the most conclusive evidence, that the Coal-measures were continuous over the large tracts occupying the Centre and South of Ireland, the Centre of Scotland, the North of England, and the South of England.*

* I have stated at length the evidence upon which this view is supported in the Memoir "On the Triassic and Permian Rocks of the Central Counties of England," Mem. Geol. Survey, p. 109 (1869). Also in my evidence before the Royal Coal-Commission, Report, vol. ii.; and at the Meeting of the British Association, Liverpool, Trans. p. 74 (1870).

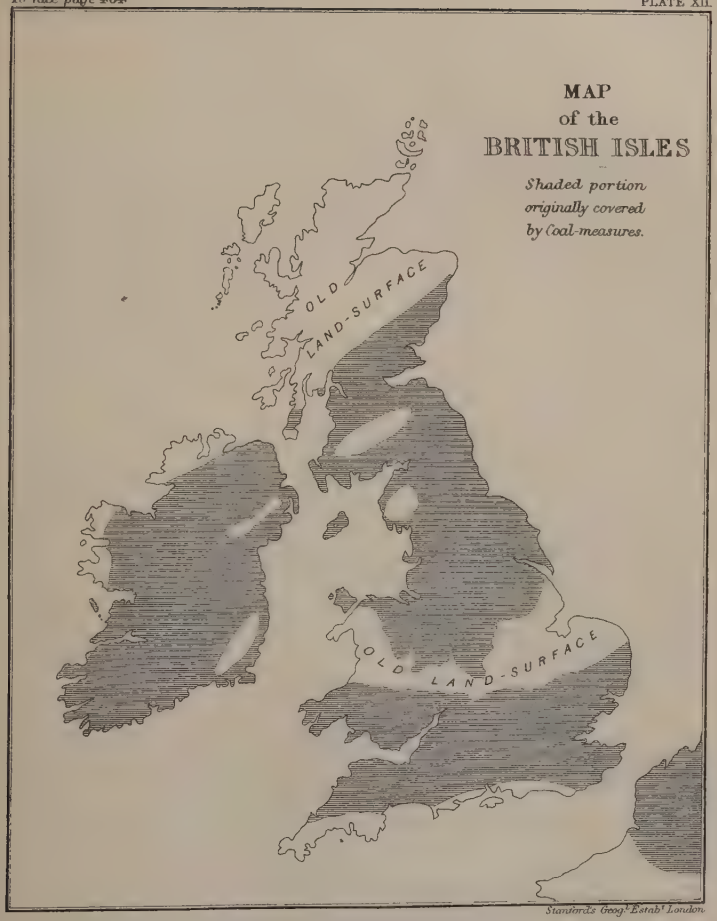


London: Edward Stanford, 6 & 7 Charing Cross.

*Terrestrial Movements at the Close of the Carboniferous Period.*—At the close of the Carboniferous period, terrestrial movements took place over the whole of the British Islands and the neighbouring parts of the Continent of Europe. These movements seem to have produced their most powerful effects upon the strata in the South and North of England, and are less discernible in the central part. The forces, however, took the form of lateral pressure, acting in approximately north and south directions, and producing flexures in the Carboniferous strata at right angles thereto; in other words, along axes ranging nearly east and west.*

The arches (or anticlinal axes) rising into ridges and traversed by fissures, were subjected to denudation on a large scale, and large tracts of Coal-measures were swept away and destroyed. One of the great arches, which itself included several minor folds,† was formed over the tract between the Yorkshire and Lancashire coal-fields on the south, and the Durham coal-field on the

* In Lancashire the axes ranged along the line of the Pendle Ridge in an E.N.E. direction. In Yorkshire it was nearly E. and W. In the South of England, Belgium, and France, nearly E. and W.

† As shown by Professor Phillips, "Geology of Yorkshire."

north. The denudation which took place over this tract laid bare the Millstone grit and Yoredale rocks, and determined the boundaries of the coal-fields just named.

Another axis, or system of flexures, originated along the southern margin of the Carboniferous Limestone region of Derbyshire, extending westward along the valley of the river Dane, north of Congleton Edge, and, as I have shown, on a former occasion, beneath the Triassic plain of Cheshire, emerging on the western side at the southern end of the Flintshire coal-field.* This lower Carboniferous axis forms, in my opinion, the southern border of the Lancashire and Cheshire Coal-basin, as shown above.†

*South of England.*—Other east and west flexures were also originated at this period, the most important being those of the south-west of England, shown by the longer axis of the South Wales Coal-field, and the uprising of the Carboniferous Limestone of the Mendips. These flexures doubtless extend under the Cretaceous rocks of the south of England, and

* See Author's paper on "The Evidences of a Ridge of Lower Carboniferous Rocks beneath the Triassic formation of the Plain of Cheshire," Journ. Geol. Soc. Lond., vol. xxv., p. 171.

† Page 462.

are continued into the Franco-Belgian trough, and even across the Rhine into Westphalia.* All these leading flexures ranging east and west approximately, accompanied by the denudation of a vast amount of upper Carboniferous material, took place before the Permian strata were deposited;—in fact, during that long lapse of time which intervened between the close of the Carboniferous, and the commencement of the Permian period.

*Distribution of Permian Strata.* — Over the bent and denuded edges and surfaces of the Carboniferous strata the Permian rocks were distributed; those of central England, within a basin only a little more extended than that of the Coal-measures themselves; the Permian beds of this tract being separated from those of the north of England by a ridge of lower Carboniferous land stretching from Charnwood Forest in Leicestershire, through Derbyshire, mid-Cheshire (along the concealed axis), into North Wales.† These Permian strata were thus

*As far as I am aware, I was the first to show the pre-Permian age of these E. and W. flexures of the S.W. of England in my paper, of which only an abstract is published in the Trans. Brit. Assoc. Liverpool, p. 75 (1870).

† See my reasons for this view in the paper already quoted,

deposited on Lower Carboniferous rocks over some parts of Yorkshire, North Lancashire, and Cumberland; while in South Lancashire, and parts of Yorkshire, Derbyshire, and Notts., they repose on various portions of the Coal-formation.

*Terrestrial Movements at the close of the Permian Period.*—At the close of the Permian period, a new series of terrestrial movements took place, but *now* along lines ranging approximately north and south, and nearly at right angles to those which preceded them. These disturbances, accompanied by denudation acting chiefly along the arches or anticlinal axes, resulted in the disseverance of the Coal-fields of Lancashire and Cheshire on one side, from those of Yorkshire, Derbyshire, and Notts. on the other. It was by this process that the Pennine chain, or great central ridge, of the North of England was upheaved, and stripped of its covering of upper Carboniferous beds.*

Journ. Geol. Soc., vol. xxv., p. 171, and chap. iii. of the Memoirs "On the Triassic and Permian Rocks of the Central Counties," p. 28.

* That this great N. and S. upheave took place before the deposition of the New Red Sandstone, is shown by the fact that the anticlinal fault which is the axis of the system of flexures passes beneath this formation at Leek, in Staffordshire, without in the least affecting it. See Maps of Geol. Survey.

During the same period of disturbance the western limits of the Flintshire and Denbighshire coal-field were determined; also, the north and south axis along which the Durham coal-field is inferred to rise and crop out beneath the sea, and which is supposed to form the eastern limits of the Derbyshire coal-basin. In the same period may also be inferred the disseverance of the South Wales from the Forest of Dean coal-field, and the sharp uprise of the Carboniferous strata along the east of the Somersetshire coal-basin.

*Basin-shape of Coal-fields due to the intersection of these two axes.*—I have thus shown, briefly here, but more fully on other occasions, that the Carboniferous rocks owe their basin-shaped structure to the intersection, nearly at right angles, of these two systems of flexures, viz.—

1. The earlier being pre-Permian, ranging along approximately east and west lines.

2. The latter being pre-Triassic, ranging along approximately north and south lines.

The intersection of these systems has caused numerous complications in the strata, which have been increased by disturbances of later date, while the disseverance of the basins from

each other, has been the necessary consequence of the enormous amount of denudation which took place chiefly over the arches or anticlinals.

On the other hand, the existing coal-basins lie in the synclinal troughs which were enclosed within the anticlinal arches.

*Distribution of the Secondary, or Mesozoic Strata.*—It will be apparent, from what I have now stated, that the coal-basins received their form before the deposition of the New Red Sandstone and the Secondary strata which were subsequently spread over the Carboniferous rocks, and served to protect the coal-fields from further denudation during a long lapse of geological time.

The manner in which the Triassic formations were themselves deposited deserves special observation, and bears directly on the question of the depth at which the Coal-measures may be supposed to lie hidden over considerable tracts of country. This will form the subject of the next, and concluding, chapter.

## CHAPTER III.

### DISTRIBUTION OF THE MESOZOIC FORMATIONS.

*South-easterly Attenuation of Strata.*—Some years since I was led to make a comparison of the thickness of the Triassic (as also the Liassic) strata over various parts of England, taken from the accurately-measured sections of the Geological Survey, and from these it appeared that they were originally distributed in such manner as to attain their greatest development toward the north-west of England, and to become thinner towards the south-east.* This south-easterly attenuation of the Triassic strata will be apparent upon a comparison of the following sections, founded on actual admeasurements of the Government surveyors :—

* See Author's paper "On the South-Easterly Attenuation of the Lower Secondary Rocks of England," Journ. Geol. Soc., vol. xvi.

| | | Cheshire and Lancashire, N.W. | Staffordshire, Midland. | Warwickshire, S.E. |
|---|---|---|---|---|
| New Red Sandstone or Trias. | Keuper series | 3,450 ft. | 1,200 ft. | 600 ft. |
| | Bunter „ | 2,150 ft. | 800 ft. | absent. |
| | | 5,600 ft. | 2,000 ft. | 600 ft. |

Here it will be observed that the attenuation of the Trias is so rapid, as to lead us to infer that in its prolongation southward and eastward from Warwickshire it scarcely extends below the Chalk of Cambridge or Bedfordshire.

In order to extend this comparison of development to the Lias, I shall now give the following comparative sections measured on several occasions at Bredon Cloud,* a hill at the north-west of Gloucestershire, at the Cotteswold Hills near Winchcombe, and in the valley of the Evenlode at Stonesfield in Oxfordshire :†—

| | | Bredon Cloud, W.N.W. | Cotteswold Hills. | Stonesfield, E.S.E. |
|---|---|---|---|---|
| Lias | Upper | 380 ft. | 200 ft. | 10 ft. |
| | Middle | 250 ft. | 150 ft. | 15 ft. |
| | Lower | 700 ft. | unknown | unknown |

The positions of the above localities lie in a relative direction from N.N.W. to S.S.E., nearly parallel to that of the attenuation of the Trias; and although the depth of the Lower Lias has not been proved in Oxfordshire, analogy leads us to infer that it thins out in that direction.

* Horiz. Sections, Geol. Survey, Sheet 60.

† "Geology of Woodstock," Mem. Geol. Survey.

Upon the same principles we cannot but conclude that all the members of this formation originally overspread the plains of Lancashire and Cheshire in great force.*

The distribution of the Lower Permian strata is somewhat irregular, as they attain a thickness of 1,800 or 2,000 feet in Staffordshire and Warwickshire. Their development in Lancashire is variable.

*Denudation of Mesozoic Strata.*—It is therefore evident that the Coal-measures of the central and north-western counties of England and Wales have been at one time buried beneath an enormous accumulation, amounting to several thousand feet, of Lower Mesozoic strata;† but it is still more worthy of observation that this *greatest* vertical development took place over those districts which are occupied by the rich coal-fields of the shires of Derby and York, Lancaster, Flint and Denbigh, Salop and Stafford, subsequently laid bare and rendered accessible by successive denudations. On the other hand, as we have seen, the same post-Carboniferous strata become thinnest in the direction of the

* Outliers of the Lower Lias occur in Cheshire and Cumberland, the remnants of a once widespread formation.

† The terms "Mesozoic" and "Secondary" are synonymous.

eastern counties; over those districts where we believe the Coal-measures have never been formed, and where, if penetrated, we should only reach Cambro-Silurian rocks of a date anterior to the coal-formation. Thus we see that the various denudations have been more active and effectual in removing the Secondary strata over those parts of England where they overspread the coal-formation, than in those districts where they overlie rocks older than, and therefore destitute of, the coal.

The reader will be assisted in the comprehension of this subject by the following ideal section, which (minor details being omitted) is intended to illustrate the past and present distribution of these strata along a band of country stretching from north-west to south-east across Central England. (Fig. 23.)

The original foundation upon which rests the Carboniferous system is shown to be the Silurian and Cambrian rocks, as we find to be the case in Staffordshire and Leicestershire. The Coal-measures are represented by a black band, thickest towards the north-west, becoming thinner and ultimately ending against the older rocks towards the south-east. The overlying formations are also represented, each outcrop-

Fig. 23.—IDEAL TRANSVERSE SECTION OF ENGLAND.
To lustrate the South-easterly attenuation of the Carboniferous and older Mesozoic Formations, as also the position of the Palæozoic Rocks under the Eastern Counties.

1. Silurian and Cambrian Rocks, forming the foundation for the more recent strata.
2. Lower Carboniferous Rocks.—3. Coal-measures.—4. Trias and Permian.—5. Lias.—6. Oolite.—7. Cretaceous.—8. Tertiary.

ping in succession towards the north-west, in which direction they become most largely developed, and thinning away towards the south-east. It will be observed that the coal-formation comes to the surface where it is most productive, and that the overlying formations have been most unsparingly swept away where they have originally been deposited in greatest force.

*Maximum denudation towards the North-west.*—Now, this enormous denudation is a consequence of the upheaval which the formations have experienced at several periods; and as the strata on the whole dip towards the

south-east, the elevatory forces have constantly acted with greatest energy in the direction of Wales, Westmoreland, and the north-western counties, also along an axis passing along the Pennine chain, and over the areas of several of the coal-fields; but they have all combined to produce one grand result, namely, the exposure of the Carboniferous rocks towards the north-west of England.

Let us now regard this subject from another point of view. Supposing for a moment that the elevatory forces had acted with the greatest energy and effect along the south-east of England so as to produce a general dip towards the north-west; in other words, in a direction opposite to the actual dip of the strata, what, let us inquire, would have been the result?

The answer is obvious; and we can state positively that, to all intents and purposes, England would have been almost as destitute of coal as she would have been had there been no Carboniferous formation. Let the reader glance at the ideal section (p. 475), and then imagine the dip reversed, and the denudation to have taken place *principally* towards the south-eastern side. Two results will at once present themselves. In the first place, the old

pre-Carboniferous rocks—those of the Cambro-Silurian system—would occupy the right-hand side of the section, and on the left-hand side the coal-formation would nowhere reach the surface, as it would lie buried beneath an accumulative depth of Secondary rocks: upon it would be piled strata belonging to the Permian, Triassic, Liassic, and Oolitic systems, 6,000 to 8,000 feet in depth, rendering it inaccessible. Even supposing the elevation of the highlands of England and Wales to have occurred for the most part, as was undoubtedly the case, before the Carboniferous period, these mountains would have been enveloped and probably smothered in the embrace of the post-Carboniferous strata; and the highlands of England would have lain along the region now occupied by the Cretaceous and Tertiary rocks. Under these conditions, Britain would have formed but an appendage of the European Continent. She could not, in all probability, have assumed that insular position which, through the favour of an overruling Providence, has rendered her "a shadow from the heat, a refuge from the storm" to the oppressed of Christendom.

I think, then, it must be evident that there

is a happy relationship between the original formation of the rocks and their present distribution; we might even go further, and say that it is highly advantageous, if not the best possible. If the elevatory forces had exerted themselves over the south-east instead of the north-west of England, the result would have been disastrous; the former region would have become a mountainous tract, similar to that of Wales, the latter an undulating plain, fitted, indeed, for agriculture, but unproductive of mineral treasures.

The concurrence of events here referred to is the more remarkable, as there is no apparent connection between the direction of the elevatory forces and the strata which are influenced by them. Two great series of events, each necessary to give effect to the other, and fraught with the highest temporal blessings to mankind, followed in due course. In a particular portion of our island rich mineral treasures were laid up, but they would never have become available if the internal movements of the earth had taken a direction differing from the reality. As it is, the Carboniferous rocks have been placed within reach over those districts where they are most rich in coal and iron, while that portion

of the country where we have reason to believe they were never formed, is mantled over with strata, which, if not peculiarly rich in mineral productions, is profusely stored with the medals of a past creation.

# APPENDIX.

## A.

### Rose Bridge Colliery, near Wigan.

In this colliery two, or rather three, coal-seams are worked. The shaft was originally sunk to the "Pemberton Four-feet" Coal in 1854, and for three years this seam was worked to a considerable extent. In September, 1857, another shaft was commenced at some distance from the former one, to extend from the "Pemberton Four-feet" mine to the "Cannel" and "King" Coals, which here lie nearly close together, and which were won on June 30th, 1858. Engine, boiler, and winding machinery were then erected in a chamber hollowed out in the workings of the Pemberton Four-feet Coal, and the trucks from the workings of the Cannel and King Coal, after having been lifted by the underground engine, were wheeled along a tramway to the bottom of the upper shaft, through which they were raised to the surface.

The use of two or more lifts or stages produces a loss of time and outlay, but has the advantage of allowing of the working of very deep coal-beds without the risks and dangers always attending such undertakings. It is

probable that this means will be generally adopted for working coal-seams from 2,000 to 3,000, or even 4,000 feet in depth. The Arley mine is now worked by means of a single lift from a depth of 2,445 feet.

## B.

In 1699, Newcastle had two-thirds of the coal-trade, and 300,000 chaldrons, in all, went annually to London. The over-sea trade employed 900,000 tons of shipping. Coals about that time sold in London for 18*s.* a chaldron, out of which 5*s.* were paid to the King, 1*s.* 6*d.* to St. Paul's, and 1*s.* 6*d.* metage. It was then stated to the House of Commons that 600 ships, one with another, of the burden of eighty Newcastle chaldrons, were employing 4,500 men, requisite for carrying on the trade.—*Hist. Fossil Fuel,* p. 318.

## C.

The following explanation of the terms here used, as given by Sir C. Lyell, may be of service to those unfamiliar with botanical nomenclature, especially in its application to palæontology:—

| | *Brongniart.* | *Lindley.* | *Examples.* |
|---|---|---|---|
| Cryptogamic. | 1 Cryptogamous amphigens, or cellular cryptogamic. | Thallogens. | Lichens, sea-weeds, fungi. |
| | 2 Cryptogamous acrogens. | Acrogens. | Mosses, equisetums, ferns, lycopodiums —(Lepidodendron, sigillaria? calamites, &c.) |
| Phanerogamic. | 3 Dicotyledonous gymnosperms. | Gymnogens. | Conifers and cycads. |
| | 4 Dicot. Angiosperms. | Exogens. | Compositæ, leguminosæ, umbelliferæ, cruciferæ, rosaceæ, forest trees, &c. Probably no representatives in the Carboniferous flora. |
| | 5 Monocotyledons. | Endogens. | Palms, lilies, aloes, rushes, grasses. |

## D.

### Coal-mining in China.

Marco Polo, who travelled through China towards the close of the 13th century, mentions coal as one of the commodities in use in his time in that country. At the present day, it is worked in the cliffs of the Pe-Kiang river at Tingtih, by means of adits driven into the side of the hill at the outcrop of the coal-seams. The works are carried on in the most primitive manner, without the aid of machinery, and the mode of working coal through vertical shafts, which may be considered as the second stage in the art of mining, appears little known. In this respect, as in almost every other, the Chinese are far behind their neighbours the Japanese. Probably, if an inhabitant of the Celestial empire were shown some of the largest collieries of Newcastle, or Wigan, he would scarcely deign to look at them, or would gravely inform you that they have similar, or better machinery, and deeper mines "Pekin side."

Mr. Oliphant states that coal is procured from a mine about five miles distant from the important city of Whang-shih-kang, or "Yellow Stone," on the river Yang-tse-kiang, situated about 400 miles from its mouth.—*Narrative of Lord Elgin's Mission to China and Japan*, vol. ii. p. 389.

## E.

### Lighting Mines before the Invention of the Davy Lamp.

There were, however, other means adopted for giving a feeble and uncertain light. The steel mill was the invention most frequently employed in the northern

counties; a description and figure of which is given in the "History of Fossil Fuel." By means of a multiplying wheel, a steel periphery was made to revolve rapidly in contact with a piece of flint, by which a succession of sparks was produced. The sparks, being formed of minute particles of steel heated to redness, are incapable of igniting the explosive gases of the mine, though sufficiently bright to light dimly the workings. In those mines where carburetted hydrogen gas existed in minute quantities, naked candles were employed for lighting, and gunpowder for blasting.

## F.

### Coal-mining—Japan.

Mr. Oliphant states that coal is raised in Japan somewhat extensively—but as a Government monopoly. One mine, at a place called Wuku Moto, in the interior of the main island of Niphon, was visited by some of the Dutch Mission. They describe the mine as being well and judiciously worked, and the coal as bituminous in its nature, and made into coke for use.

That the coal is worked by means of vertical shafts appears from the fact that the Prince of Fizen once ordered a steam-engine from Europe for pumping the water out of his mines; but, through the native jealousy of the presence of foreigners in the country, refused to allow the Dutch engineer to erect the machinery upon the spot. The Japanese, however, are quite independent of European aid for such an object, as they thoroughly understand the construction and management of the steam-engine.—*Lord Elgin's Mission to China and Japan*, vol. ii.

Kæmpfer, in his "History of Japan," also refers to the

abundance of this mineral—stating that it is dug in great quantity in the province of Tsekusen, and in most of the northern provinces. This rich and productive empire also yields abundance of gold, silver, copper, and iron; and the Japanese armourers excel the Europeans, and perhaps any other nation, in tempering steel.

## G.

### Boring at Harwich.

The following are the particulars of this interesting trial in search of water:—

| | | |
|---|---|---|
| Drift ... ... ... ... | 25 | feet. |
| Tertiary Strata ... ... ... | 51½ | „ |
| Chalk ... ... ... ... | 888 | „ |
| Greensand and Gault ... ... ... | 61 | „ |
| Black Slaty Rock ... ... ... | 44½ | „ |
| | 1070 | „ |

Mr. Prestwich is evidently inclined to refer the slate to the Palæozoic period. Its cleaved character, the absence of lime, and the trace of one fossil shell—apparently a large *Posidonia*—seem to corroborate this view. The exact geological position is probably that of the Lower Carboniferous Series of the Mendips and Ardennes. (See Mr. Prestwich's observations, Rep. Coal-Commission, vol. i., pp. 150, 160.)

# INDEX.


A.

Africa, coal-beds in, 387.
Aghabehy coal-field, 309.
Agricola's treatise on coal-mining, 32.
Aguillon, M. Louis, on fault in French coal-field, 330.
—— on distribution of coal-tracts in Russia, 347.
—— on Russian coal-fields, 347.
Alais, coal-field of, 333.
"Alberbury breccia" in Shrewsbury coal-field, 127.
Allport, Mr. S., on structure of basalts of South Staffordshire, 163.
—— on structure of trap rock at Whitwick colliery, 228.
America, British; coal-fields of, 388.
—— United States, coal-fields of, 396, 401.
—— South, coal-fields of, 410.
Ancient Britons, coal-works of, 13.
Anglesea coal-field, 152.
—— succession of strata in, 153.
—— great fault in, 153.
Anglesea coal-field, greenstone dyke in the, 154.
Anglo-Saxons, coal-mining by the, 21.
Anglo-Normans, coal-mining under the, 24.
Anthracite of Switzerland, etc., 344-5.
—— Savoy, 344-5.
—— Ireland, 300.
—— Italy, 344-5.
—— the Donetz coal-field, 349.
Antipoff, Captain A., on coal-field of Poland, 350, 367.
Antrim, coal-mining in (1770), 34.
—— coal-field (Ballycastle), 313.
Appalachian coal-basin, 398.
Arctic regions, coal-plants from, 45.
Argyleshire coal-field, 295.
Arigna coal-fields, 301, 307.
—— coal-series of, 309.
Arley mine coal, 188, 205.
Assam coal-fields, India, 359.
Austen, Mr. R. G., on concealed coal-fields of the South of England, 324.
Australian coal-fields, 366.

Aveline, Mr. W. T., on the Derbyshire coal-field, 238.
Ayrshire coal-field, 289.
—— general succession of beds in, 290.
—— average thickness of coal-seams, 291.
—— igneous rocks, 291.
—— section of Dalmellington coal-field in, 291.

B.

Baily, Mr., on the fossils of the Irish coal-measures, 306.
Ball, Mr. V., on the Ramghur coal-field, 357.
Ballagan beds, of Scotland, 275.
Ballycastle coal-field, 301, 313.
—— succession of strata, 314.
—— black-band ironstone of, 318.
—— dolerite of, 313, 316.
—— coal-series of, 315.
—— geological age of, 317.
Banda Oriental, coal-measures of, 412.
Basin des Drac, coal-field of, 334.
Beckett, Mr. H., on coal-mining in Cannock Chase, 162.
Bellot, Mr., on character of the coal at Labuan, 365.
Binney, Mr. E., on lower coal-measures, Flintshire, 149.
—— on lower coal-measures of Churnet Valley, 181.
—— on the Lancashire coal-field, 186.
Binney, Mr. E., on lower coal-measures of Lancashire, 191.
—— on the hæmatite bed of the Medlock Valley, 201, 202.
—— on relations of Manchester and North Staffordshire coal-measures, 201.
Blanford, Messrs., on the Indian coal-fields, 352, 354.
Boghead gas coal, 276.
Bohemia, lignite of, 343.
Bohemian coal-field, 340.
—— different ages of coal formation, 340.
Bokaro coal-field, India, 356.
Boldon Book; the, references to coal-mining, 25.
Bollaert, Mr., on the coal of Chile, 413.
Borneo, coal at Labuan in, 365.
Brazil, coal-fields of, 410.
Brora coal-field, 296.
—— age of, 296.
—— section of pit in, 297.
Brown, Mr. R., on the Richmond coal-field, 394.
—— on coal in N. W. America, 404.
Bryce, Dr. J., on the Ballycastle coal-field, 314.
Bryham, Mr., on underground temperature, 439.
—— on effects of pressure in mines, 447.
Buckland, Rev. Dr., on coal-resources, 1.
Burdie House limestone, 285.
Burnley, coal-basin of, 203.
—— thickness of Carboniferous strata, 205.
—— coal-seams of, 206.
—— resources of, 208.

C.

Calamites, affinities of, 48.
Calciferous sandstone series of Scotland, 271.
California, coal-strata in, 404.
Camden, on coal-mining in Scotland, 15th century, 35.
Campbell, Mr., on the coal-trade in 1774, 37.
Cannel coal, origin of name, 33.
—— valuable seam of, in Flintshire coal-field, 147.
Canobie coal-field, coal-seams of, 217, 295.
—— dip of strata of, 295.
—— list of coal-seams, 296.
—— Geddes, Mr., on, 296.
Carboniferous plants of Bohemian coal-field, 341.
—— strata, thickness of, 4.
—— limestone series, coal in, 263.
—— changes in its physical characters, 268.
Carruthers, Mr. W., on fossil plants from Brazil, 412.
Castlecomer coal-field, 305.
Charter of Henry VIII., 27.
Cheadle, Staffordshire, coal-field of, 180.
Cheshire, coal-field of, 183, 194.
Chevalier, M. Michael, on Bohemian coal-formation, 340.
Chile, coal of, 413.
China, coal-field of, 362.
—— great extent of, 362.
—— geological age of, 363.
Churnet Valley iron ore, 176, 181.
Clackmannan coal-field, 287.
—— coal-series of, 288.
Clarke, Rev. W. B., on coal-fields of New South Wales, 368—370.
Cleats, in coal-seams, Durham, 260.
Clee Hills, coal-fields of, 128.
—— height of, above the sea, 128.
Clyde-basin, coal-field of, 272.
—— trap-rocks of, 272-3.
—— coal-series of, 274.
—— gas coal of, 276.
—— ironstones of, 275-6.
—— fossils of coal-measures, 277—279.
—— resources of, 299.
Coal, origin of name, 22.
Coal-basins of Britain, 462.
—— formed by intersection of two systems of flexures and denudation, 463, 469.
Coalbrook Dale coal-field, 3, 130.
—— surveys and descriptions of, 131.
—— pits, in district of, 132.
—— succession of coal-seams in, 133.
—— Symon fault in, 133.
—— upper coal-measures in, 135.
—— organic remains, 136.
—— resources of, 138.
—— denudation of coal-strata, 133, 135.
Coal-commission, 2, *et passim.*
Coal-consumption, annual, 420, 450.
Coal-formation, continuation of from Flintshire to Lancashire, 150.
Coal-measures of Britain, original distribution of, 463.

Coal-mines, depths of, 6, 428, 432, 439.
Coal-mining, impetus given by invention of the safety-lamp and steam-engine, 38.
Coal-produce of Great Britain, from 1819-40, 39.
—— various countries, 416.
—— Great Britain, from 1854-70, 417.
—— British coal-fields for 1870, 420.
Coal-supply, observations on duration of, 449.
Coal, vegetable origin of, 41.
—— formation of, 41.
Colchester and Hants (Brit. Amer.) coal-field, 393.
Coleman, Rev. W. C., on the origin of "coal," 23.
Collieries, number of, in Great Britain, 420.
Colorado and New Mexico, coal in, 401.
Commissioners on Coal-resources, 321, 324—329.
Credner, Herr, on Weald coal formation, N. W. Germany, 341.
Cuilceagh, millstone grit of, 308.
Cumberland coal-field, 214.
—— succession of strata, 215.
—— succession of coal-seams, 215.
—— faults, 216.
—— resources of, 218.
Cumberland coal-field (British America), 391.

D.

Darwin, Mr. C., on the age of the coal-formation of Chile, 414.
Dawson, Dr., on the coal-fields of New Brunswick, &c., 389.
—— on the coal-field of Pictou, 393.
Dechen, Herr von, observations on Saarbrück coal-basin, 335.
De la Beche, Sir H., on Rock-fault in Forest of Dean coal-field, 121.
Denbighshire coal-field, 141.
—— succession of seams in, 142
—— ironstone in, 143.
—— resources of, 145.
—— section across, 144.
Denny, Mr., on fish remains of Yorkshire, &c., 243.
Deoghur coal-field, India, 358.
Derbyshire, ancient coal-mining in, 14.
Derbyshire and Yorkshire coal-field, 231.
—— originally united to that of Lancashire, 233.
—— authors who have written on the coal-field, 234.
—— succession of strata, 235.
—— lower coal-measures, 236, 241.
—— sections of strata at Shireoak, Barnsley, Cinderhill, 237, 240.
—— principal coal-seams, 240.
—— coal-series at Dewsbury and Halifax, 242.
—— fossils, 243.
—— extension of coal-measures beneath the Permian beds, 244, 246.
—— resources, 247, 249.
—— out-put of coal, 251.
Dickinson, Mr. J., on mortality amongst coal-miners of Britain and Belgium, 40.

Dickinson, Mr. J., on resources of Anglesea coal-field, 154.
Disco Island, coal in, 407.
Don, coal-field of the, 349.
D'Orbigny, M. A., on the age of the coal-formation of Chile, 414.
Dufrénoy et Elie de Beaumont, Carte Géologique de la France, 332.
Dukinfield colliery, 193.
———— depth of, 7.
Dumont, M. A., Carte Géologique de la Belgique, 332.
Du Noyer, Mr., on the Arigna coal-fields, 307, 308.
Durham, coal-mining in, 29.
Durham and Northumberland coal-field, 252.
—— extension of coal-measures below the magnesian limestone, 253.
—— basin-shaped form of coal-field, 253.
—— faults in the coal-measures, 255.
—— general series of formations, 256.
—— principal coal-seams, 257.
—— basaltic dykes, 259.
—— faults, 260.
—— resources, 262, 265.
—— produce, 265.

E.

Elliot, Mr., on coal under the sea along the coast of Durham, 261.
—— on resources of the N. Staffordshire coal-field, 179.
England, ideal section across, 475.
Europe, coal-fields of, 330.

F.

Faults, "Red-rock" fault of Cheshire, 194.
—— in Lancashire coal-field, 195.
Ferns of the coal-period, 47.
Fifeshire coal-field, 286.
—— coal-seams of, 286.
Flexures, two principal systems, 465, 468.
Flintshire coal-field, 146.
—— dip of beds in, 146.
—— valuable cannel in, 147.
—— general section of, 147.
—— section at Mold in, 148.
Forbes, Mr. C., on coal-seams of New Zealand, 379.
Forest of Dean coal-field, 116.
—— general structure of, 116.
—— scenery of, 117.
—— succession of coal-seams, 119.
—— iron furnaces in, 120.
—— rock fault in, 120.
—— resources of, 121.
Forest of Wyre coal-field, 122.
—— section of strata in, 123.
—— section at Harcott colliery in, 124.
—— Permian breccia in, 122.
Forster, Mr. T. E., on the resources of the Whitehaven coal-field, 218.
—— on coal under the sea along the coast of Northumberland, 261.
French and Belgium coal-fields, 330.
—— dip and position of strata, 331.
—— section across Liége coal-field, 331.

French and Belgium coal-fields, length of coal trough, 332.
—— section across Valenciennes coal-field, 332.
—— coal-strata overlaid by other formations, 331, 333.
—— depth of Liége and Mons coal-basins, 333.
—— smaller French coal-fields, 333.

G.

Gannister beds of Lancashire, 194, 208.
Geddes, Mr. J., on Argyleshire coal-field, 295.
—— on Canobie and Sanquhar coal-strata, 296.
—— on resources of Scotch coal-fields, 298.
Geikie, Professor, on the Canobie coal-field, 217.
—— on age of basalt dykes of Scotland, 274.
—— on Lesmahago coal-basin, 294.
—— Mr. J., on volcanic rocks of Scotland, 273.
—— on Ayrshire coal-field, 290.
Geinitz, Dr., on fossil reptiles of Saarbrück coal-field, 335.
—— on coal-measures of Saxony, 336.
—— on Zwickau-Chemnitz coal-field, 337.
—— on the age of anthracite of Savoy, 345.
Glasgow coal-field, 272.
—— trap-rocks of Necropolis, 273.
Glow, Loch, Scotland, 35.
Goldsitch trough, 181.
Göppert, Dr. H. R., on the fossils of the coal-measures of Silesia, 343, 348.
Gould, Mr., on coal-field of Tasmania, 378.
Green, Mr. A. H., on marine fossils in coal-measures of Lancashire, 198.
Griffith, Sir R., on the Connaught coal-field, 307.
—— on the Tyrone coal-field, 311.
—— on the Ballycastle coal-field, 314, 316.

H.

Haast, Dr. Julius, on the coal deposits of New Zealand, 383.
Haddington coal-field, 280, 283.
Hanover, coal-field of, 340.
Hartley, Mr., on resources of the South Staffordshire coal-field, 166.
Hector, Dr. J., on the age of the coal of Vancouver, 403.
Hetton collieries, experiments on temperature at, 443.
Hochstetter, Dr. F. von, on coal-fields of New Zealand, 380, 385.
Horseley, on Roman coal-mining, 18.
Howell, Mr. H. H., on the Warwickshire coal-field, 220.
—— on the form of the Durham coal-field, 253.
—— on coal-series of Mid-Lothian, 281.
—— on coal-series of Haddington, 284.

Hughes, Mr. T. H., on the Karanpura coal-field, 385.
—— on the Bokaro coal-field, 356.
—— on the Jherria coal-field, 356.
Hull, Professor E., on thickness of Carboniferous strata in Lancashire, 205.
—— on coal-resources, 449.
—— on physical limit of depth for coal-mining, 422.
—— on comparative thickness of Carboniferous strata, 460.
—— on S. E. attenuation of strata, 460, 471.
—— views on origin of coal-basins, 462.
Humidity, effects of, in mines, 443.
Hunt, Mr. R., on coal-field of Asturias, 345.
—— on annual coal-consumption, 451.
Hurlet coal, position of, 274.

I.

Ibbenbüren, coal-field of, 339.
Igneous rocks of Carboniferous age, Scotland, 271, 272.
Illinois coal-basin, 398.
India, coal-fields of, 352—361.
—— geological age, 353-4.
—— names of, 353.
—— importance of, 360.
Ingleton and Burton coal-field, North Lancashire, 212.
—— "Great Craven Fault," in, 212.
—— section of coal-series in, 213.
Inspectors of coal-mines appointed, 39.
Ireland, Carboniferous rocks of, 300, 302.
—— groups of coal-fields, 300, 307.
—— succession of strata, 301.
—— fossils of, 306.
—— resources of coal-fields, 319.
Ironstone, black-band of Scotland, 274, 276.

J.

Jevons, Professor, on annual consumption of coal, 452.
Jones, Mr. D., on structure of Coalbrook Dale coal-field, 131.
—— on the Symon fault, 134.
—— section of strata, 136.
Judd, Mr. J. W., on coal-fields of Teruel, 346.
—— on the Punfield formation, 346.
Jukes, the late Professor J. B., on the structure of the S. Staffordshire coal-field, 157.
—— on basalt of Rowley Regis, 163.
—— on Irish coal-fields, 304, 305.
—— on Charnwood Forest rocks, 323.

K.

Kane, Sir R., on the Connaught coal-fields, 307, 310.
Karanpura coal-field, India, 355, 357.
Kinahan, Mr. G. H., on Irish coal-fields, 304, 305.
Kurhurbari coal-field, India, 358.

L.

Lancashire, S., coal-field, 184.
—— succession of formations, 186.
—— Arley mine coal of, 188.
—— coal-series of, 188, 192.
—— fossils of, 191, 195, 197.
—— lower coal-measures of, 191, 193.
—— Gannister coal of, 194.
—— resources of, 199.
—— upper coal-measures of, 201.
Landale, Mr., on the Fifeshire coal-field, 286.
Leicestershire coal-field, 225.
—— formations around the, 226.
—— coal-seams of, 227.
—— igneous rocks of, 227.
—— rock-faults, 229.
—— salt-water in coal, 229.
—— resources of, 229.
—— fossils of strata, 230.
Leinster coal-fields, 304.
Leitrim coal-fields, 307—310.
—— ironstones of, 310.
Leland, on the use of coal, 29.
Lesmahago coal-basin, 293.
—— gas coal of, 293.
—— sections of coal-series, 294.
—— size of coal-tract, 294.
Liége, coal-trough of, 330, 331, 333.
—— depth of, 330.
"Lightmoor fault," Coalbrook Dale, 136.
Lignite of Bohemia, 340.
—— and brown coal of Silesia, 343.
—— Bohemia, 343.
Limits of deep mining, 422.
London, use of coal in, 27, 30.
Lyell, Sir C., on ancient coal-mining, 14.
—— on the coast-section of South Joggins, bay of Fundy, 392.
—— on age of Richmond coal-field, 401.

M.

Mackenzie River, coal-deposits of, 402.
M'Culloch, Mr., on coal-produce in 1840, 38.
Magnesian limestone, thickness of, 249.
Malaysian and Japan coal-fields, 364.
Mammat, Mr., on the Leicestershire coal-field, 225, 230.
Manchester, coal-series at, 190.
—— coal-field of, 200.
Maryport, coal-seams at, 216.
Matthews, Mr. W., on the duration of the "Thick" coal of Dudley, 167.
Medlicott, Mr., on the age of the Assam coal-measures, 353, 359.
—— on the Nerbudda coal-field, 359.
Mesozoic strata, distribution of, 470, 471.
—— comparative thicknesses of, 472.
—— denudation of 473, 476.
Michigan coal-basin, 398.
Mid-Lothian coal-field, 280.
—— coal-series of, 281.
—— coal-seams of, 282.
—— principal coal-seams, 283.
Millstone Grit of England, 76.

Millstone Grit of Ireland, 302, 308.
Missouri coal-basin, 398.
Monkwearmouth colliery, depth of, 7.
Mons, coal-trough of, 331, 333.
Moore, Mr. R., on coal-series of Scotland, 274.
—— Mr. W., on coal-series of Clyde Valley, 275.
Moravia, coal-field of, 343.
Munster, coal-measures of, 302.
Murchison, the late Sir R., on Coalbrook Dale coal-field, 131.
—— on concealed coal-fields of England, 322.
—— on Spirorbis Limestone, 135.
—— on the Brora coal-field, 297.
—— on the position of the coal-measures in Durham under the magnesian limestone, 225.
—— on the coal-fields of Russia, 347—349.

N.

Nerbudda coal-field, India, 358.
New Brunswick, coal-field of, 389.
Newfoundland, coal-field of, 388.
New South Wales, coal-field of, 366.
New Zealand, coal-fields of, 379.
—— character and geological age of coal-fields, 379.
—— North Island, brown coal of, 381.
New Zealand, South Island, large deposit of coal in, 382—387.
—— fossil plants in coal-strata, 384.
—— economic importance of coal-beds, 386.
North Wales, coal-fields of, 139.
—— "Great Minera vein" in, 140.
Nova Scotia, coal-fields of, 389.

O.

Oldham, coal-series at, 192, 193.
Oldham, Dr., on the Indian coal-fields, 353, 356.

P.

Pacific Coast (North), coal-fields of, 404.
Park Gate coal-field, Cheshire, 210.
—— dip of strata at, 210.
—— section of coal-series at, 211.
—— connection with Flintshire coal-field, 210.
Pendle Ridge, Lancashire, structure of, 204.
Pendleton Colliery, depth of, 6.
Pennant, on early coal-mines in North Wales, 32.
Pennine chain in Derbyshire, 233.
—— in Northumberland, 256.
Permian strata, 467.
—— of Derbyshire, 244.
Phillips, Prof., on Burton coal-field, 212.

Phillips, Prof., on Gannister beds of Yorkshire, 241.
Physical geology of Carboniferous rocks, 459.
Pictou, coal-field of, 393.
Piesberg coal-field, Hanover, 340.
Plants of the coal-period, 42.
—— Brongniart's classification of, 42.
—— Göppert's classification of, 42.
—— Lindley's experiments on, 44.
Plant, Mr. N., on Brazilian coal-fields, 410.
Plauenschen Grundes, coal-field of, 337.
Plot, Dr., on coal-mining in Staffordshire in 1686, 34.
Poland, coal-field of, 350.
Pottery, manufacture of N. Staffordshire, 182.
Pressure, effects of, in mines, 447.
Prestwich, Mr. J., on Coalbrook Dale coal-field, 131; on the Symon fault in do., 133.
—— on sections of Liége and Valenciennes coal-fields, 331, 332.
Prussia, coal-fields of, 334.
Prussian and Austrian Silesia, coal-fields of, 348.
Pumpelly, Mr. R., on remains of cycads in Chinese coal-field, 363.
Purchas, Rev. Mr., discoverer of brown coal in N. Island, New Zealand, 381.

Q.

Queensland, coal-field of, 376.

R.

Ramghur coal-field, India, 357.
Ramsay, Prof., on succession of strata in Anglesea coal-field, 153.
—— views on the extension of the Coal-measures of Derbyshire, &c., eastward, 246.
—— on the southern limits of the Coal-measures of Durham, 255.
—— on resources of concealed coal-fields of England, 326.
Randall, Mr., on structure of Coalbrook Dale coal-field, 131.
Raniganj coal-field, India, 353.
Resources of British coal-fields, 302.
—— of visible coal-fields, 326.
—— of concealed coal-fields, 328.
—— of Irish coal-fields, 327, 328.
—— summary of, 329.
Rhine Valley, coal-measures under the, 333, 339.
Richmond and Cape Breton, coal-fields of, 394.
Richmond (Virginia) coal-field, 401.
Richthofen, Baron von, on coal-field of China, 362.
Roberts, Mr. G. E., on fossils of Forest of Wyre coal-field, 125.
Rogers, the late Prof., on areas of American coal-fields, 398, 401.
Romans, the, coal-mining by, 16, 19.

Ronchamp, coal-trough of, 333.
Rose Bridge colliery, depth of, 6, 431.
—— thermometrical observations at, 432.
Russia, coal-fields of, 347—350.

S.

Saarbrück coal-field, 334.
—— supposed depth and temperature of lowest coal-seams, 335.
—— fossils of, 335.
Salter, Mr., on fossils of Lancashire coal-field, 195, 197.
Sanquhar coal-field, 295.
—— list of coal-seams in, 296.
Saone et Loire, coal-basin of, 333.
Saskatchewan River, lignite beds of, 403.
Savoy, anthracite of, 344.
Saxony, coal-fields of, 336—338.
Scotland, history of coal-mining in, 30.
—— coal-fields of, 266.
—— geological structure of, 266.
—— coal-basins of, 268.
—— geological age of coal-fields, 268.
—— lower coal-series of, 269.
—— carboniferous series of, 270.
—— plutonic rocks of, 271—273.
—— resources of, 298.
—— produce of, 299.
Scott, Mr. W. T., on structure of Coalbrook Dale coal-field, 131.
Scott, Mr. W. T., on the Symon fault in ditto, 134.
Sea-coal, origin of the term, 28.
Sedgwick, Professor, on the Cumberland coal-field, 215.
Selwyn, Mr. A., on coal-field of Victoria, 366.
Shireoak colliery, 237, 245.
Shrewsbury coal-field, 126.
Shultz, Mr., on coal-basin of Asturias, 345.
Silesia, coal-fields of, 342, 343.
Silkstone coal of Yorkshire, identical with the Arley coal of Lancashire, 241.
Skye coal-field, 298.
Slavery of coal-miners in Scotland till 1799, 36.
Slimon, Mr., section of coal-series in Lesmahago, 293.
Smith, Dr. A., analysis of Churnet iron-ore, 182.
Spain, coal-fields of, 345, 346.
Spirorbis limestone in N. Staffordshire, 172.
Splint coal of Yorkshire, &c., 241.
St. Etienne, coal-field of, 333.
St. Helens, coal-series at, 188.
Staffordshire, North, coal-field of, 168.
—— geological structure of, 169.
—— faults in, 170.
—— Permian beds overlying coal, 171.
—— succession of strata in, 172.
—— succession of coal-seams in, 173.
—— ironstones in, 176.
—— fossils of, 177.
—— resources of, 178.

Staffordshire, South, coal-field of, 155.
—— physical geology of, 157.
—— succession of formations, 159.
—— coal-series of, 159.
—— ten-yard coal of, 160.
—— southerly thinning of strata, 161.
—— coal-field of, igneous rocks in, 163.
—— ironstones of, 164.
—— fossils of, 165.
—— resources of, 165.
Switzerland, anthracite of, 344.

T.

Tasmania, coal-field of, 377.
Taylor, Mr. T. J., on Roman coal-mining, 19.
—— on history of coal-mining at Newcastle, 29.
—— Mr. R. C., on coal produce in 1819, 38.
Temperature, an obstacle to deep mining, 423.
—— internal terrestrial, experiments on, 424—434.
—— Dukinfield colliery, 428.
—— Rose Bridge colliery (Wigan), 431, 439.
—— causes of variation in rate of increase of, 433.
—— mean rate of increase of, 435.
—— table showing rate of increase, of 437.
—— of air-current in mines, 439.
—— effect of seasons on, 442.
Texas, coal-basin of, 398.
Theophrastus, supposed reference to coal by, 12.
Tiddeman, Mr., on Burton coal-field, 212.
Trinidad, coal and lignite of, 407.
Tyrone coal-field, 301, 311.
—— succession of formations, 312.
—— coal-series of, 313.

U.

Utah (U. S.), coal in, 402.

V.

Vancouver Island, coal deposits of, 402.
Vegetation of the coal-period, uniformity of, 44.
Ventilation, effects in lowering underground temperature, 438.
Victoria, coal-field of, 366.
—— different geological ages of coal-series, 367.
Vivian, Mr. H., on resources of the South Wales coal-field, 1, 94, 326.

W.

Wall, Mr., on coal and lignite of Trinidad, 407.
Ward, Mr. J., on fossils from coal-measures of North Staffordshire, 177.
Warwickshire coal-field, 220.
—— succession of strata, 222.
—— coal-seams of, 222.
—— spirorbis limestone of, 222.
—— intrusive greenstones of, 223.
—— millstone grit altered, 224.

Warwickshire coal-field, resources of, 224.
Waste in combustion of coal, 454.
—— working of coal, 456.
Weald, coal-formation N. W. Germany, 341.
Wealden formation, Hanover, coal in, 341.
Weaver, Mr., on the coal-seams of Munster, 304.
Westminster colliery, Denbighshire, section at, 144.
Westphalia, coal-field of, 338.
Whitehaven, coal-series at, 215, 217.
—— coal-mining in 1739, 37.
Whittaker, on ancient coal-mining in Lancashire, 15.
Whitwick colliery, sheet of trap-rock at, 228.
—— commenced by George Stephenson, 228.
Wigan, cannel coal at, 33.
—— coal-series at, 189.
Williams, Mr. Price, on rate of increase of coal-consumption, 453.
—— Mr. D. H., on the Raniganj coal-field, 335.
Wilkinson, Mr. T. T., on the Burnley coal-basin, 203.
Wood, Mr. N., on the age of the red sandstones of Northumberland, 264.
—— Mr. L., on ventilation of mines, 442.
Woodhouse, Mr. J. T., on resources of Warwickshire coal-field, 224.
—— on the resources of the Leicestershire coal-field, 229.
Workington, coal-series at, 216.
Wright, Mr. T., on Roman coal-mining, 19.
Wroxeter, Roman coal-mining near, 20.
Wyken colliery, 221.

Y.

Young, Mr. J., on age of Ballagan beds, 275.

Z.

Zwickau-Chemnitz, coal-field of, 336.

Watson and Hazell, Printers, London and Aylesbury.

# GEOLOGICAL SURVEY OF THE BRITISH ISLES.

**Published by Authority of Her Majesty's Government, under the Superintendence of the Director-General of the Geological Surveys of the United Kingdom.**

**ENGLAND and WALES.**—This Map is the Ordnance 1-inch Series, specially adapted, and Coloured Geologically; arranged in 110 Divisions, of which about 72 are published, others being in progress. Some of the Divisions are printed on a single Sheet, size, 40 inches by 27; other Divisions are printed on two or four smaller Sheets. Price of the large Sheets, 8*s.* 6*d.* and 4*s.*; of the smaller, 3*s.* and 1*s.* each.

**HORIZONTAL GEOLOGICAL SECTIONS:** To accompany the Government Geological Map of England and Wales, with descriptive Notes. These Sections are on a scale of 6 inches to a mile, and describe in detail the Geology of the Country over which they are drawn. Descriptions are engraved on each plate, thus rendering each Section a concise report of the district it traverses. Size, 40 inches by 27. Price, 5*s.* each.

**VERTICAL GEOLOGICAL SECTIONS:** To accompany and illustrate the Maps and Horizontal Sections; with Practical Details of Mineral Structure. They are arranged, in the form of Vertical Columns, to a scale of 40 feet to an inch, and illustrate such details as it is impossible to give in the Horizontal Sections. Size, 40 inches by 27. Price, 3*s.* 6*d.* each.

**MEMOIRS of the GEOLOGICAL SURVEY,** illustrating the Geology of various parts of the Country, are published at prices from 8*d.* upwards. Also Figures and Descriptions illustrative of the British Organic Remains.

**An INDEX GEOLOGICAL MAP of ENGLAND and WALES,** on the scale of 4 miles to an inch, is being issued as the Geological Survey progresses. The whole of Wales and Herefordshire, with small parts of the adjoining Counties, are published. Price, 3*s.* 6*d.* each Sheet.

**The COAL FIELDS of LANCASHIRE and NORTHUMBERLAND** are being surveyed on the scale of 6 inches to a mile. 46 Sheets are already published. Size, 40 inches by 27. Price, 4*s.* and 6*s.* per Sheet.

**SCOTLAND.**—This Map is also the Ordnance 1-inch, specially adapted, and Coloured Geologically. It is arranged in 121 Divisions; size of each, 21 inches by 30; and is accompanied by Horizontal and Vertical Sections. 63 of the Sheets are now published, price 5*s.* each.

**The COAL FIELDS of EDINBURGHSHIRE and HADDINGTONSHIRE** are surveyed on the 6-inch scale, and published in Sheets. Size, 40 inches by 27. Price, 6*s.* and 3*s.* 6*d.* each.

**IRELAND.**—This Map is likewise the Ordnance 1-inch, specially adapted, and Geologically Coloured; arranged in 205 Divisions, of which nearly half are published; including several Counties in the South. Size of each Division, 12 inches by 18. Price, 3*s.* and 1*s.* 6*d.* each.

**INDEX to the COLOURS and SIGNS of the GEOLOGICAL MAPS.** New Edition, re-engraved. One Sheet. Size, 40 inches by 27. Price, 5*s.*

**MINERAL STATISTICS** of the United Kingdom of Great Britain and Ireland. Published annually from the year 1848 to 1871 inclusive.

For complete List of the Geological Maps, Sections, and Memoirs, published by the Geological Survey of Great Britain and Ireland, see Stanford's Geological Survey Catalogue.

LONDON:
EDWARD STANFORD, 6 AND 7, CHARING CROSS, S.W.,
Agent by Appointment.

# GEOLOGICAL MAPS.

**The GEOLOGICAL STRUCTURE of the GLOBE, according to AMI BOUÉ.** By the late A. K. Johnston, LL.D., etc. With Notes (8 pages folio) on some general principles in Geology and their Application. By J. P. Nicol, LL.D. Scale, 15 miles to an inch; Size, 22 inches by 26. Price, with Letterpress, 15*s.*

**EUROPE:** Exhibiting the different Systems of Rocks, according to the latest researches, and from inedited materials. By the late Sir R. I. Murchison, Bart., and James Nicol, F.R.S.E., F.G.S., Professor of Natural History in the University of Aberdeen. Scale, 76 miles to an inch; Size, 50 inches by 41. Four Sheets, beautifully printed in Colours. Price, £3 3*s.*; or Mounted on Linen, in 4to. Case, £3 10*s.*

**BRITISH ISLES and part of FRANCE:** Showing also the Inland Navigation, Railways, Roads, and Sites of Minerals. By J. A. Knipe. Scale, 12 miles to inch; Size, 54 inches by 66. On four Sheets, 75*s.*; Mounted on Linen on Roller, Varnished, or folded in Morocco Case, £4 4*s.*; on Spring Rollers, £6 16*s.* 6*d.*

**GEOLOGICAL and PALÆONTOLOGICAL MAP of the BRITISH ISLES.** By A. K. Johnston, LL.D., etc., from the Sketches and Notes of Professor Edward Forbes, F.R.S., &c. Scale, 25 miles to an inch; size, 26 inches by 42. With Memoranda (8 pages) on the Geology and Palæontology of the British Isles, by Edward Forbes, F.R.S., &c. Price, 21*s.*

**BRITISH ISLES and adjacent Coast of FRANCE.** By John Phillips, F.R.S., F.G.S. Scale, 25 miles to an inch; Size, 26 inches by 33. Price, in Sheet, 8*s.*; Mounted on Linen, in Case, 12*s.*

**BRITISH ISLES.** By Archibald Geikie, F.R.S.E., F.G.S., Director of the Geological Survey of Scotland, with Sections and Drawings of Characteristic Fossils; accompanied by a Handbook, explaining in a clear and concise form the leading Features of British Geology. Scale, 14 miles to an inch; Size, 42 inches by 50. Price (with Handbook), Mounted on Linen, on Roller, plain, £1 1*s.*; Varnished, £1 3*s.*; Folded, in a Case, for the library-table or the tourist's knapsack, £1 5*s.* The Handbook separately, 2*s.*

**TABLE of BRITISH SEDIMENTARY and FOSSILIFEROUS STRATA.** By Henry Bristow, F.R.S., F.G.S., Director of the Geological Survey of England and Wales. With Description of Life Groups and Distribution, by R. Etheridge, F.R.S. On one Large Sheet. Price, 4*s.*

**ENGLAND and WALES:** According to the most recent Researches. By the late Sir Roderick I. Murchison, Bart., K.C.B., &c. Fifth Edition, with all the Railways. Scale, 28 miles to an inch; Size, 14 inches by 18; Price, Sheet, 5*s.*; Mounted on Linen, in Case, 7*s.*

**ENGLAND and WALES.** By Andrew C. Ramsay, F.R.S. and G.S., Director-General of the Geological Surveys of Great Britain and Ireland, and Professor of Geology at the Royal School of Mines. This map shows all the Railways, Roads, &c., and when Mounted in Case, folds into a convenient pocket size, making an excellent Travelling Map. Scale, 12 miles to an inch; size, 36 inches by 42. Third Edition, with Corrections and Additions. Price, in Sheet, £1 5*s.*; Mounted on Linen, in Case, £1 10*s.*; or on Roller, Varnished, £1 12*s.*

LONDON:
EDWARD STANFORD, 6 AND 7, CHARING CROSS, S.W.

# GEOLOGICAL MAPS.

**PHYSICAL and GEOLOGICAL MAP of ENGLAND and WALES.**—By the late G. B. GREENOUGH, Esq., F.R.S., F.G.S., on the basis of the original Map of WILLIAM SMITH, 1815; Revised and Improved under the superintendence of a Committee of the Geological Society of London. Scale, 6 miles to an inch; size, 63 inches by 84. Price of the Complete Map, in Sheets, £2 16*s.*; Mounted on Linen, in Case, £3 13*s.* 6*d.*; or on Roller, Varnished, £4 4*s.*; Spring Roller, £6 6*s.*

Separate Sheets:—No. 1. North West, 6*s.*
2. North East, 4*s.* 6*d.*
3. West Central, 13*s.* 6*d.*
4. East Central, 10*s.* 6*d.*
5. South West, 16*s.*
6. South East, 10*s.*

Index to the Geological Colouring, 1*s.* 6*d.*

**GEOLOGICAL MAP of LONDON and its ENVIRONS.**—Scale, 1 inch to a mile; size, 24 inches by 26. Compiled from various authorities by J. B. JORDAN, Esq., of the Mining Record Office, and printed in colours exhibiting the superficial deposits. It includes Watford on the north, Epsom on the south, Barking on the east, and Southall on the west, and shows the Main Roads in and around the Metropolis, the Railroads completed, and the Sanctioned Lines. Price, folded in Cover, 5*s.*; mounted on Linen, in Case, 7*s.* 6*d.*; or on Roller, varnished, 9*s.*

**GEOLOGY and CONTOURS of LONDON and its ENVIRONS.**—By ROBERT W. MYLNE, C.E., &c. Scale, 1·43 inch to a mile; size, 24 inches by 14. A SECTION of the STRATA in a line from HENDON to EAST WICKHAM is appended at the foot of the Map. Price in Sheet, 7*s.* 6*d.*; or Mounted on Linen, in Case, 10*s.*

**SCOTLAND: From the most Recent Authorities and Personal Observations.** By JAMES NICOL, F.R.S.E., &c. Scale, 10 miles to 1 inch; size, 24 inches by 36. Mounted on Linen, in Case, 21*s.*

**IRELAND.**—By JOSEPH BEETE JUKES, M.A., F.R.S., late Director of H.M. Geological Survey of Ireland. This Map is constructed on the basis of the Ordnance Survey, and Coloured Geologically. It also shows the Railways, Stations, Roads, Canals, Antiquities, &c., and when mounted in Case, forms a good and convenient Travelling Map. Scale, 8 miles to 1 inch; size, 31 inches by 38. On two Sheets, 25*s.*; Mounted on Linen, in Case, 30*s.*; or on Roller, Varnished, 32*s.*

**CANADA and the adjacent Regions, including Parts of the other** BRITISH PROVINCES and of the UNITED STATES. By Sir W. E. LOGAN, F.R.S., &c., Director of the Geological Survey of Canada. The Geology of Canada is derived from the results of the Canadian Geological Survey; that of the other British Provinces from the labours of Dr. J. W. DAWSON, Professors JAS. ROBB, J. B. JUKES, and others; while that of the United States is compiled under the authority of Professor JAMES HALL, from various sources mentioned in 'The Atlas of the Geology of Canada.' Scale, 25 miles to an inch; size, 102 inches by 45. On eight Sheets, £3 10*s.*; Mounted on Linen, on Roller, Varnished, or in two parts to fold, in Morocco, £5 5*s.*

**INDIA.**—General Sketch of the Physical and Geological Features of British India. By G. B. GREENOUGH, Esq., F.R.S. With Tables of Indian Coal Fields, Minerals, Fossils, &c. Scale, 25 miles to an inch; size, 68 inches by 80. On nine Sheets, Price £3 3*s.*; Mounted on Linen, to fold in Morocco Case, or on Roller, Varnished, £4 4*s.*; Spring Roller, £7 17*s.* 6*d.*

LONDON:
EDWARD STANFORD, 6 AND 7, CHARING CROSS, S.W.

# GENERAL ATLASES.

**COMPLETE ATLAS of ANCIENT and MODERN GEOGRAPHY:** Containing 230 Modern, Classical, and Celestial Maps, with Plans of celebrated Cities, and Alphabetical Indexes, Designed and Arranged under the Superintendence of the Society for the Diffusion of Useful Knowledge. The Maps are constructed by eminent Geographers, and embody the most recent Discoveries and Corrections; and the whole are engraved on Steel, in the best manner. Strongly half-bound Russia, in one vol. with the Maps Coloured, £9 10*s.*; or half-bound Morocco, in two vols. £10.

**USEFUL KNOWLEDGE SOCIETY'S ATLAS of MODERN GEOGRAPHY:** Containing Geological and Physical Maps of England and Wales, six Maps of the Stars, and all the modern Maps in the Series, India and North America being very fully represented. In all 150 Maps, beautifully Coloured, and elegantly half-bound, with Index, £5 5*s.*

**FAMILY ATLAS:** New Edition, with an Index on the front edge, enabling the Student to turn to any Map without reference to the Table of Contents. A Selection of 80 Coloured Maps, from the Useful Knowledge Society's Series, showing the most recent Discoveries in all parts of the World; and Plans of London and Paris, on a large scale, are included. The Geological Map of England and Wales, by Sir RODERICK MURCHISON, Bart., K.C.B., F.R.S., &c.; the Star Maps, by Sir JOHN LUBBOCK, Bart. Half-bound, Morocco, £3 3*s.*

**UNIVERSITY ATLAS of CLASSICAL and MODERN GEOGRAPHY.**—Containing 53 Ancient and Modern Maps, Coloured, with valuable consulting Indexes. Half-bound Morocco, gilt edges, £1 11*s.* 6*d.*

**CYCLOPÆDIAN ATLAS of GENERAL MAPS:** Containing 39 Coloured Maps selected from the Series designed by the Useful Knowledge Society, with Index. Strongly half-bound, 21*s.*

*** This forms a Companion Atlas to the 'National,' 'English,' and other Cyclopædias, and was recommended by the publishers of 'The English Cyclopædia,' on the completion of the Geographical Division of that Work.

**HARROW ATLAS of MODERN GEOGRAPHY:** Containing 30 Coloured Maps, with Index to the Principal Places. Cloth, lettered, 12*s.* 6*d.*

**JUNIOR HARROW ATLAS of MODERN GEOGRAPHY:** Containing 14 Coloured Maps, with Index to the Principal Places. Cloth, 7*s.*

**HARROW ATLAS of CLASSICAL GEOGRAPHY:** Containing 23 Coloured Maps, with Index. Cloth, lettered, 12*s.* 6*d.*

**JUNIOR HARROW ATLAS of CLASSICAL GEOGRAPHY:** Containing 11 Coloured Maps, with Index. Cloth, 7*s.*

**ELEMENTARY PHYSICAL ATLAS,** intended chiefly for Map-Drawing, and the study of the Great Physical Features and Relief Contours of the Continent, with an Introduction to serve as a Guide for both purposes. By the REV. J. P. FAUNTHORPE, M.A., F.R.G.S., Vice-Principal and late Geographical Lecturer of the Training College, Battersea. Third Edition. Nine Maps, printed in Colour, with descriptive Letterpress. Price, 3*s.*

LONDON:
EDWARD STANFORD, 6 AND 7, CHARING CROSS, S.W.

# LIST OF BOOKS

PUBLISHED BY

## EDWARD STANFORD,

## 55 & 8, CHARING CROSS,

LONDON, S.W.,

AGENT, BY APPOINTMENT, FOR THE SALE OF THE ORDNANCE AND GEOLOGICAL SURVEY PUBLICATIONS, THE ADMIRALTY CHARTS, INDIA OFFICE PUBLICATIONS, ETC.

**ADDERLEY (Sir C. B.).—COLONIAL POLICY and HISTORY**—REVIEW of "The COLONIAL POLICY of LORD J. RUSSELL'S ADMINISTRATION, BY EARL GREY, 1853," and of SUBSEQUENT COLONIAL HISTORY. By the Right Hon. Sir C. B. ADDERLEY, K.C.M.G., M.P. Demy 8vo, cloth, 9*s*.

**AMERICA, NORTH.—NOTES on the GEOGRAPHY of** NORTH AMERICA, PHYSICAL and POLITICAL. Intended to serve as a TEXT BOOK for the USE of ELEMENTARY CLASSES, and as a HANDBOOK to the WALL MAP prepared under the direction of the **Society for Promoting Christian Knowledge, and the National Society for Promoting the Education of the Poor.** With Coloured Physical Map. Crown 8vo, cloth, 1*s*.

—— **SOUTH.—NOTES on the GEOGRAPHY of SOUTH** AMERICA, PHYSICAL and POLITICAL. Intended to serve as a TEXT BOOK for the USE of ELEMENTARY CLASSES, and as a HANDBOOK to the WALL MAP prepared under the direction of the **Society for Promoting Christian Knowledge, and the National Society for Promoting the Education of the Poor.** With Coloured Physical Map. Crown 8vo, cloth, 1*s*.

**ANDLAU'S (Baron) GRAMMAR and KEY to the GERMAN** LANGUAGE: Being an easy and complete System for acquiring this useful tongue, with Progressive Exercises, &c. By the BARON VON ANDLAU, late Director of the German, French, and Classical College, Clapham Rise, London. Fourth Edition, revised and greatly enlarged. Demy 12mo, cloth, 3*s*. 6*d*.

—— **GERMAN READING BOOK:** Containing Sentences, Descriptions, Tales, and Poetry, with the necessary explanations in English, for the Use of Schools, Private, and Self Instruction. First Course. Demy 12mo, cloth, 3*s*. 6*d*.

—— **GERMAN READING BOOK.** Second Course. Demy 12mo, cloth, 4*s*. 6*d*.

**ANSTIE.—THE COAL FIELDS OF GLOUCESTERSHIRE** AND SOMERSETSHIRE, AND THEIR RESOURCES. By JOHN ANSTIE, B.A., Fellow of the Geological Society of London, Associate of the Institute of Civil Engineers, Civil and Mining Engineer, &c. With Tables and Sections. Imperial 8vo, cloth, 6*s*.

**ATLASES.** See Catalogue of Atlases, Maps, &c.

**BAILEY (J.).—CENTRAL AMERICA**: Describing each of the States of Guatemala, Honduras, Salvador, Nicaragua, and Costa Rica —their Natural Features, Products, Population, and remarkable capacity for Colonization. With Three Views. Post 8vo, cloth, 5*s*.

**BEAUVOISIN'S (Mariot de) FRENCH VERBS at a GLANCE**: A Summary of the French Verbs, embracing an entirely new System of Conjugation, by which the forms of any French Verb may be ascertained at a glance. Together with numerous Practical Illustrations of their Idiomatic Construction, copious Notes, and a List of the Principal Verbs. New Edition, Twenty-sixth Thousand, enlarged and entirely rewritten. Demy 8vo, price 1*s*.

**BELLAMY.—TABLES FOR THE USE OF ENGINEERS AND** ARCHITECTS in Taking out QUANTITIES of MASONRY, IRONWORK, &c. By C. J. Bellamy, C.E. Royal 8vo, cloth, 15*s*.

**BEVAN (Phillips, F.R.G.S.).—The TEACHERS' LIST, 1873**: Containing a Calendar of all Executive and Examining Bodies, Universities, General and Special Colleges; Public, Proprietary, and Middle-class Schools; Denominational Colleges and Schools; the principal Private Schools: Education of Women, Training Colleges, &c.; together with a complete Alphabetical Directory of Qualified and Certificated Teachers, and a List of School Boards, with the names of the Officers. Dedicated by permission to Sir Francis R. Sandford, C.B., LL.D., Secretary to the Committee of Council on Education. Demy 8vo, half-bound roan, 9*s*.

**BIRCH.—EXAMPLES of LABOURERS' COTTAGES, with** PLANS for IMPROVING the DWELLINGS of the POOR in LARGE TOWNS. By John Birch, Architect, Author of 'Designs for Dwellings of the Labouring Classes,' to which was awarded the Medal and Premium of the Society of Arts. Imperial 8vo, cloth, illustrated, 3*s*. 6*d*.

**BOLLAERT.—The WARS of SUCCESSION of PORTUGAL** and SPAIN, from 1826 to 1840: Containing an Account of the Siege of Oporto, 1832–3; Reminiscences, Political, Military, &c.; with Résumé of Political History to the Present Time. By William Bollaert, F.R.G.S., Cor. Mem. Univ., Chile; Ethno. Socs. London, New York, &c. With Maps and Illustrations. 2 vols. demy 8vo, cloth, 30*s*.

**BOOK-KEEPING.—THOUGHTS on DOUBLE ENTRY and** BALANCE SHEETS, with Examples of a Ledger, the Balancing of Accounts, &c. Post 8vo, cloth, 1*s*. 6*d*.

**BOULOGNE.—GUIDE to BOULOGNE and its ENVIRONS.** With Maps and Illustrations. Demy 12mo, cloth, 2*s*. 6*d*.

**BOWRING. — The DECIMAL SYSTEM, in NUMBERS,** COINS, and ACCOUNTS, especially with REFERENCE to the DECIMALISATION of the CURRENCY and ACCOUNTANCY of the UNITED KINGDOM. By the late Sir John Bowring, LL.D., formerly Governor of Hong Kong, and Her Britannic Majesty's Plenipotentiary and Superintendent of Trade in China. Illustrated with 120 Engravings of Coins, Ancient and Modern. Post 8vo, cloth, 4*s*.

**BRADLEY (Lonsdale, F.G.S.).—An ENQUIRY into the DEPOSITION of LEAD ORE in the MINERAL VEINS of SWALEDALE, YORKSHIRE.** With Geological Map of Swaledale, and numerous Geological Sections. Royal 8vo, cloth, 21*s.*

**BRAZILIAN COLONIZATION, from an EUROPEAN POINT of VIEW.** By JACARÉ ASSU. Demy 8vo, cloth, 2*s.* 6*d.*

**BREES.—PICTORIAL ILLUSTRATIONS of NEW ZEALAND.** By S. C. BREES, late Principal Engineer and Surveyor to the New Zealand Company. Cloth, 21*s.* (published at 42*s.*).

**BRITISH ARMY, The.** SKETCHES OF BRITISH SOLDIERS; a Series of Coloured Prints, from the Drawings made by Command for Her Majesty the Queen, by GEORGE H. THOMAS, and graciously lent for publication.

The Series comprises:—1. Life Guards and Royal Horse Guards.—2. Dragoon Guards and Light Dragoons.—3. Royal Artillery.—4. Royal Engineers and Military Train.—5. The Guards.—6. Regiments of the Line.

On Six Sheets, size of each 25 inches by 19, price 27*s.* the set; or, sold separately, price 5*s.* each.

*** This beautiful Series of Coloured Lithographs is printed on Superfine Thick Paper, and can be had framed in any style to order.

**BROWNE (W. A., LL.D.).—The MERCHANT'S HANDBOOK.** A Book of Reference for the use of those engaged in Domestic and Foreign Commerce. Second Edition. Demy 12mo, cloth, 5*s.*

This work affords full and reliable information from official sources of the currencies and moneys of account, and the weights and measures of all the great commercial countries in the world.

—— **MONEY, WEIGHTS, and MEASURES of the CHIEF** COMMERCIAL NATIONS IN THE WORLD, with the British Equivalents. Fourth Edition. Demy 12mo, cloth, 1*s.* 6*d.*; or paper cover, 1*s.*

—— **ARITHMETICAL EXAMPLES for MILITARY and** CIVIL SERVICE STUDENTS: Being a complete Treatise on Arithmetic. Consisting of the Questions that have been given at the Military and Civil Service Examinations, with Rules, Solutions, and Answers. Demy 12mo, cloth, 5*s.*

KEY to Same. By MAYERS. Demy 12mo, cloth, 4*s.* 6*d.*

—— **ARMY TESTS in ARITHMETIC:** Being the Questions set to Candidates for Woolwich Direct Commissions, Sandhurst, Commissariat, and Staff College. WITH ANSWERS. Demy 12mo, cloth, 3*s.* 6*d.*

—— **CIVIL SERVICE TESTS in ARITHMETIC:** Being Specimens of the more difficult Questions in the Civil Service Reports, with full Solutions. To which are appended the Questions in the Eleventh Report, WITH ANSWERS. Demy 12mo, cloth, 2*s.* 6*d.*

**BROWNE (W. A., LL.D.).—ARITHMETICAL QUESTIONS** in the 8th CIVIL SERVICE REPORT, with Solutions. Demy 12mo, 1*s.*

—— **CIVIL SERVICE GUIDE to HISTORY**: Being the Historical Questions in the Civil Service Reports. Arranged under the several Periods and Reigns to which they belong. Demy 12mo, cloth, 2*s.* 6*d.*

—— **CIVIL SERVICE GEOGRAPHY**: Being the Geographical Questions in the Civil Service Reports. Collected and Arranged by W. A. BROWNE, LL.D. Demy 12mo, cloth, 2*s.* 6*d.*

—— **SPECIMENS of HANDWRITING**: Approved by the Civil Service Commissioners. Demy 8vo, 2*d.*

**CHAMBERS.—HANDBOOK for EASTBOURNE and SEAFORD**, and the NEIGHBOURHOOD. By G. F. CHAMBERS, F.R.A.S., of the Inner Temple, Barrister-at-Law; Author of 'Descriptive Astronomy,' &c. Fifth Edition, crown 8vo, 1*s.*; with Map, 1*s.* 4*d.*

**CHERPILLOUD'S (Prof. J.) BOOK of VERSIONS**; or, Guide to French Translation and Construction. New Edition, revised, by Prof. C. J. DELILLE, late of the City of London School. Demy 12mo, bound, 3*s.* 6*d.*

—— **KEY to the ABOVE.—PARTIE FRANÇAISE** du LIVRE de VERSIONS; ou, Guide à la Traduction de l'Anglais en Français. By Prof. C. J. DELILLE. Demy 12mo, bound, 3*s.* 6*d.*

**CHRONOLOGICAL PICTURES of ENGLISH HISTORY**, from the ANCIENT BRITONS to the Reign of QUEEN VICTORIA. A Series of 40 Plates, containing 360 Illustrations, beautifully Tinted, Designed, and Drawn on Stone, by Sir JOHN GILBERT, President of the Society of Painters in Water Colours. With an additional Plate to illustrate the Reign of Queen Victoria, thus continuing the Series up to the Present Time. Each Plate illustrates a period or a reign, and Facsimiles of the Autographs of the Sovereigns and the most distinguished Characters are attached. New Edition. Imperial folio, half-bound morocco, 3*l.*; the Set of Plates in Sheets, 2*l.*; in best Oak Frame, with Glass, 3*l.*; in cheaper Frame, with Glass, 2*l.* 12*s.* 6*d.*; Single Plates, 1*s.* each.

**CHRONOLOGICAL OUTLINES of ENGLISH HISTORY**, from the ANCIENT BRITONS to the Reign of QUEEN VICTORIA. A descriptive Handbook to the series of Chronological Pictures of English History by Sir JOHN GILBERT, President of the Society of Painters in Water Colours. Crown 8vo, cloth, 2*s.*

**COLONIZATION CIRCULAR, 1873.** Issued by HER MAJESTY'S COLONIAL LAND AND EMIGRATION COMMISSIONERS. Containing OFFICIAL INFORMATION respecting Emigration Commissioners, Officers, Agents, &c. — Cost of Passages, Assistance to Emigrate — Demand for Labour in the Colonies — Cost of Provisions and Clothing — Wages, Prices, &c.—Population, Revenue, and Expenditure—General Notices and Warnings—Coolie Emigration—Summaries of Laws on Professional Qualifications — Naturalization of Aliens—Carriage of Passengers — Disposal of Crown Lands—Privileges in acquisition of Land to Naval and Military Officers — Gold Mining, &c. —Climate — Index, &c. Fcap. 4to. Price 6*d.*; per post, 9*d.* [*Published Annually.*

**CRACROFT'S INVESTMENT TRACTS.—AMERICAN RAILWAYS AS INVESTMENTS.** By ROBERT GIFFEN. Dedicated to the Members of the London Stock Exchange. Fourth Edition. 1*s.*

—— **THE TRUSTEES' GUIDE:** A SYNOPSIS of the Ordinary Powers of Trustees in regard to Investments, with Practical Directions and Tables of Securities. By BERNARD CRACROFT. Tenth Edition. 1*s.*

—— **INVESTORS' AND SOLICITORS' MEMORANDUM BOOK.** Third Edition. 5*s.*

—— **"CONSOLS CHART."** Second Edition. Mounted, 5*s.*; Sheet, 2*s.* 6*d.*

**DALLY.—GUIDE to JERSEY and GUERNSEY;** with Notes on their History, Geology, Climate, Agriculture, Laws, &c. By F. F. DALLY, Esq., Author of an 'Essay on the Agriculture of the Channel Islands.' Third Edition. With Maps. Fcap. 8vo, cloth, 3*s.* 6*d.*; or separately, Jersey, 2*s.*; Guernsey, 2*s.*

**DAMON (Robert).—GUIDE to the GEOLOGY of WEYMOUTH** and the ISLAND of PORTLAND: Containing a Map of the District, Geological Sections, Coast Views, Figures of the characteristic Fossils, and other Illustrations; with numerous Notes on the Botany and Zoology of the Coast and Neighbourhood. Fcap. 8vo, cloth, 5*s.*

A Supplement to the above, consisting of Nine Lithographic Plates of Fossils, drawn by BONE. 2*s.* 6*d.*

**DE HORSEY.—RULE OF THE ROAD AT SEA:** Being PRACTICAL DIRECTIONS for complying with the BOARD of TRADE REGULATIONS for PREVENTING COLLISIONS at SEA. By COMMODORE A. F. R. DE HORSEY, R.N., Author of 'On Manning the Navy,' 'Our Iron Navy,' &c. Fcap. 8vo, cloth, 1*s.*

**DE MORGAN.—ELEMENTS of ARITHMETIC.** By AUGUSTUS DE MORGAN; of Trinity College, Cambridge; Fellow of the Royal Astronomical Society, and of the Cambridge Philosophical Society; late Professor of Mathematics in University College, London. Nineteenth Thousand. Royal 12mo, cloth, 5*s.*

**EASY LESSONS in FRENCH CONVERSATION,** adapted to the topics generally interesting to Schoolboys. Demy 12mo, cloth, 1*s.* 6*d.*

**ECCLESIASTICAL COMMISSIONERS' REPORT.—APPENDIX** to the Twenty-Sixth Report of the Ecclesiastical Commissioners for England. Parts II. and III. Demy 8vo, paper cover, 5*s.*

**EDWARDS.—THE GERMANS IN FRANCE.** Notes on the Method and Conduct of the Invasion; the Relations between Invaders and Invaded; and the Modern Usages of War. By H. SUTHERLAND EDWARDS. Post 8vo, cloth, 10*s.* 6*d.*

**EHRLICH.—A FRENCH METHOD, THEORETICAL and PRACTICAL**; adapted to the Requirements of the University Middle-Class Examinations. By H. WM. EHRLICH, M.A., Ph.D., French Master, Royal Grammar School, Newcastle-on-Tyne. Second Edition. Demy 12mo, cloth, 3*s.* 6*d.*

**ELLIS'S LATIN EXERCISES.** Corrected by T. K. ARNOLD. 12mo, cloth, 3*s.* 6*d.*

—— KEY to the Above. 3*s.*

**ETIENNE'S LITTLE BOY'S FIRST FRENCH BOOK:** On the plan of Arnold's Henry's First Latin Book. Second Edition. Demy 12mo, cloth, 2*s.* 6*d.*

**EVILL (Wm.).—A WINTER JOURNEY to ROME and BACK.** With Glances at Strasburg, Milan, Florence, Naples, Pompeii, and Venice, and an Account of the Siege and Fall of Strasburg. Third Edition, with Map and Appendix. Crown 8vo, cloth, 4*s.* 6*d.*

**FIJI ISLANDS.—HOW ABOUT FIJI?** Or Annexation *v.* Non-Annexation. With an Account of the Various Proposals for Cession, and a short Sketch of the Natural Aspects of the Group. By "R." Demy 8vo, paper cover, 2*s.*

**FITCH (J. G., M.A.).—METHODS of TEACHING ARITHMETIC.** By J. G. FITCH, M.A., one of Her Majesty's Inspectors of Schools, and Examiner in the University of London, &c. Second Edition. Price 6*d.*

**FITZ-GEORGE.—PLAN of the BATTLE of SEDAN,** accompanied by a Short Memoir. By Captain FITZ-GEORGE, Royal Welsh Fusiliers. With Maps and Photographic Views. Demy 8vo, cloth, 12*s.*

**FOSTER.—MANUAL of GEOGRAPHICAL PRONUNCIATION** and ETYMOLOGY. By A. F. FOSTER, A.M., Author of 'A General Treatise on Geography,' and other Educational Works; late Editor of 'Chambers's Educational Course;' Assistant-Commissioner to the Royal Education Inquiry, &c. Ninth Edition. Fcap. 12mo, limp cloth, 2*s.*

**GAWLER (Colonel).—SIKHIM:** With Hints on Mountain and Jungle Warfare. Exhibiting also the facilities for opening Commercial Relations through the State of Sikhim with Central Asia, Thibet, and Western China. By Colonel J. C. GAWLER, F.R.G.S., late Deputy Adjutant-General in India. With Map and Illustrations. Demy 8vo, paper, 3*s.*; cloth, 3*s.* 6*d.*

**GILL.—CHEMISTRY for SCHOOLS**: an Introduction to the Practical Study of Chemistry. By C. Haughton Gill, late Assistant Examiner in Chemistry at the University of London, late Teacher of Chemistry and Experimental Physics in University College School. Second Edition. One Hundred Illustrations. Crown 8vo, cloth, 4*s.* 6*d.*

**—— (J. W.).—FIRST STEPS in ENGLISH GRAMMAR**: Compiled for the purpose of enabling Teachers to put into the hands of their Pupils a book containing only such parts as should be committed to memory. Royal 18mo, price 3*d.*

**GRANTHAM.—WATER SUPPLY FOR COUNTRY MANSIONS.** A Paper read at the Royal Institute of British Architects, by Richard B. Grantham, M. Inst., C.E., F.G.S. With Two Plans. Demy 4to, paper covers, 2*s.*

**HALL (Henry, F.R.G.S.).—MANUAL of SOUTH AFRICAN** GEOGRAPHY: Forming a Companion to the Map of South Africa to 16° South Latitude. Intended for the use of the Upper Classes in Government Schools, and of Candidates for the Civil Service. Second Edition. Fcap. 8vo, cloth, 6*s.*

**—— SERIES of TECHNICAL VOCABULARIES, in EIGHT** LANGUAGES, comprising the leading terms in the following constructive branches:

Civil and Ecclesiastical Architecture. 2*s.*
Military Architecture and Fortification. 2*s.*
Civil Engineering and Surveying. 3*s.*

**—— (Townshend M., F.G.S.).—The MINERALOGIST'S DIRECTORY**; or, A GUIDE to the PRINCIPAL MINERAL LOCALITIES in the UNITED KINGDOM of GREAT BRITAIN and IRELAND. Post 8vo, cloth, 6*s.*

**HANDBOOK to GOVERNMENT SITUATIONS**: Showing the MODE of APPOINTMENT and RATES of PAY, and containing the most RECENT REGULATIONS for OPEN COMPETITIONS for the HOME and INDIAN CIVIL SERVICES, the ENGINEERING COLLEGE, the FOREST SERVICE, and for ARMY EXAMINATIONS. With Examination Papers, and Specimens of Handwriting extracted from the Reports of the Civil Service Commissioners. Fourth Edition. Crown 8vo, cloth, 3*s.* 6*d.*

**HAY (Sir John, Bart.).—ASHANTI and the GOLD COAST,** and What we Know of it. A Sketch. By Vice-Admiral Sir John Dalrymple Hay, Bart., M.P., C.B., D.C.L., F.R.S., &c. With Coloured Map. Second Edition. Crown 8vo, cloth, 2*s.* 6*d.*

**HOLDSWORTH.—DEEP-SEA FISHING and FISHING** BOATS. An Account of the Practical Working of the various Fisheries carried on around the British Islands. With Illustrations and Descriptions of the Fishing Boats, Nets, and other gear in use; and Notices of the Principal Fishing Stations in the United Kingdom. By Edmund W. H. Holdsworth, F.L.S., F.Z.S., &c., late Secretary to the Royal Sea Fisheries Commission. Medium 8vo, cloth, 21*s.*

**HULL.—COAL FIELDS of GREAT BRITAIN**; their History, Structure, and Resources; with Notices of the Coal Fields of other parts of the World. By EDWARD HULL, M.A., F.R.S., Director of the Geological Survey of Ireland, Professor of Geology in the Royal College of Science, Dublin, &c. With Maps and Illustrations. Third Edition, revised and enlarged, embodying the Reports of the Royal Coal Commission. Demy 8vo, cloth. 16*s*.

**HURLBURT.—BRITAIN and HER COLONIES.** By J. B. HURLBURT, M.A., LL.D., Member of the Convocation of the University of Toronto. Demy 8vo, cloth, 10*s*.

**HUTCHINSON (T. J.).—The PARANÁ: With INCIDENTS** of the PARAGUAYAN WAR, and SOUTH AMERICAN RECOLLECTIONS, from 1861 to 1868. By THOMAS J. HUTCHINSON, F.R.G.S., F.R.S.L., F.E.S., &c., H.B.M. Consul for Callao (late for Rosario); Author of 'Ten Years' Wanderings amongst the Ethiopians,' &c. With Map and Illustrations. Demy 8vo, cloth, 21*s*.

—— **BUENOS AYRES and ARGENTINE GLEANINGS**; with Extracts from a Diary of Salado Exploration. With Maps, Illustrations, and Statistical Tables. Demy 8vo, cloth, 16*s*.

**IRVING (C., LL.D.).—SERIES OF CATECHISMS FOR** SCHOOLS. 18mo, 9*d*. each.

Algebra, Part I.—Algebra, Part II.—Antiquities of Greece—Antiquities of Rome—Astronomy—Botany—British Constitution—Classical Biography—Chemistry—English Grammar—French Grammar—General Geography—General Knowledge—History of England—History of France—History of Greece—History of Ireland—History of Rome—History of Scotland—Italian Grammar—Jewish Antiquities—Music—Mythology—Natural Philosophy—Practical Chemistry—Sacred History—Universal History.

**JACKSON (George).—LATIN TYRO'S GUIDE**; or, FIRST STEPS towards the ACQUIREMENT of LATIN. New Edition, 12mo, cloth, 1*s*. 6*d*.

—— PART II. 12mo, cloth, 1*s*. 6*d*.

**JENKINSON'S PRACTICAL GUIDE to the ISLE OF MAN.** Containing Introduction—Population—Table of Distances—Heights of Mountains—Charges for Porters and Conveyances—How to Spend a Flying Visit to the Isle of Man—Voyage round the Island—Hotel Tariffs—Coaches, &c.—Douglas, Castletown, Peel, and Ramsay Sections—A Walk round the Island—Index, &c. Also, Chapters on Local Names—Mineralogy—Civil History—Ecclesiastical History—Geology—Botany—Zoology—Agriculture—Commerce—And Sea Trout-fishing. With Map. Fcap. 8vo, cloth, 5*s*.

—— **SMALLER PRACTICAL GUIDE to the ISLE OF MAN.** Containing Distances—Heights of Mountains—Charges for Porters and Conveyances—How to Spend a Flying Visit—Voyage round the Island, &c. With Map. Fcap. 8vo, 2*s*.

**JENKINSON'S PRACTICAL GUIDE to the ENGLISH** LAKE DISTRICT. With Nine Maps and Three Panoramic Views. Contents:—Introduction—How to Spend a Flying Visit to the Lakes —a Fourteen Days' Pedestrian Tour—Charges for Conveyances, Ponies, and Guides — Heights of Mountains, Lakes, Tarns, and Passes— Local Names—Meteorology, Geology, and Botany.

WINDERMERE, LANGDALE, GRASMERE, CONISTON, KESWICK, BUTTERMERE, WASTWATER, and ULLSWATER SECTIONS, containing full Information and Instruction respecting Walks, Drives, Boating, Ascents, Excursions, &c. Third Edition. Fcap. 8vo, cloth, 6*s*.

*** The SECTIONS separately: KESWICK — WINDERMERE and LANGDALE — CONISTON, BUTTERMERE, and WASTWATER — GRASMERE and ULLSWATER. With Maps, price 1*s*. 6*d*. each.

—— **EIGHTEEN-PENNY GUIDE to the ENGLISH LAKE** DISTRICT: Containing Charges for Conveyances, Ponies, and Guides; Heights of Passes, Mountains, Lakes, and Tarns; with information and instructions respecting Walks, Drives, Boating, Ascents, Excursions, &c. Fcap. 8vo, with Map, 1*s*. 6*d*.

**JERVIS. — The MINERAL RESOURCES of CENTRAL** ITALY; Geological, Historical, and Commercial Notices of the Mines and Marble Quarries. With Supplement, containing a Geological and Chemical Account of the Mineral Springs of Central Italy; with Analyses of the Waters. By W. P. JERVIS, Conservator of the Royal Italian Industrial Museum at Turin, &c. Second Edition. Royal 8vo, 5*s*.

**JEVONS (W. Stanley, M.A.).—A SERIOUS FALL in the** VALUE of GOLD ASCERTAINED, and its Social Effects set forth. With two Diagrams. Demy 8vo, cloth, 4*s*.

**KING.—VIRGIL'S ÆNEID:** Translated into English Verse by the Rev. J. M. King, Vicar of Cutcombe, late Scholar of Ball. Coll., Oxon. Second Edition. Crown, 8vo.

**LANG.—QUEENSLAND, AUSTRALIA,** the Future Cotton Field of Great Britain; with a Disquisition on the Origin, Manners, and Customs of the Aborigines. By J. D. LANG, D.D., A.M., one of the Representatives of the City of Sydney in the Parliament of New South Wales. With Two Coloured Maps. Post 8vo, cloth, 12*s*.

**LEES (Lady).—A FEW DAYS in BELGIUM and HOLLAND:** An Idle Book for an Idle Hour. By LADY LEES, Author of 'Dried Flowers,' 'Effie's Tales,' &c. Contents:—Bruges, Ghent, Antwerp, Bruxelles, Rotterdam, the Hague, Delft, Leyden, Haarlem, Amsterdam, &c. Crown 8vo, cloth, 4*s*. 6*d*.

**LEWIS.—The ENGLISH LANGUAGE:** Its GRAMMAR and HISTORY; together with a TREATISE on ENGLISH COMPOSITION, and SETS of EXERCISES and EXAMINATION PAPERS for the ASSISTANCE of TEACHERS and STUDENTS. By the Rev. HENRY LEWIS, B.A., Principal of Culham Training College, late Senior Lecturer at the National Society's Training College, Battersea. Fifth Edition. Fcap. 8vo, cloth, 3*s*.

**LEWIS.—ENGLISH GRAMMAR for BEGINNERS, in a** SERIES of EASY LESSONS. By the Rev. HENRY LEWIS, B.A., Principal of Culham Training College, late Senior Lecturer at the National Society's Training College, Battersea. Intended for the use of Junior Classes, and as an Introduction to the Author's larger English Grammar. Medium 18mo, price 2*d.*

**—— (J.)—DIGEST OF THE ENGLISH CENSUS OF 1871,** compiled from the Official Returns and Edited by JAMES LEWIS (of the Registrar-General's Department, Somerset House). Sanctioned by the Registrar-General, and dedicated by permission to the President, Vice-Presidents, and Council of the Statistical Society of London. Royal 8vo, in stiff paper covers, 4*s.*; or, in cloth boards, 5*s.*

**LEY (W. Clement).—The LAWS of the WINDS PREVAIL-**ING in WESTERN EUROPE. Part I. With Synoptic Charts and Barograms; Charts of Mean Tracks of Baric Minima; of Isobarics in North-Western Europe; and of the Tracks of the Great Depressions in August, 1868, and January and March, 1869. Demy 8vo, cloth, 12*s.*

**LOBLEY (J. Logan, F.G.S.).—MOUNT VESUVIUS: A DE-**SCRIPTIVE, HISTORICAL, and GEOLOGICAL ACCOUNT of the VOLCANO, with a NOTICE of the RECENT ERUPTION, and an Appendix, containing Letters by PLINY the Younger, a Table of Dates of Eruptions, and a List of Vesuvian Minerals. With View, Map (printed in Colours), and Section. Demy 8vo, cloth, 5*s.*

**LONDON and ENVIRONS.—The MULTUM in PARVO** GUIDE to LONDON and its ENVIRONS, about 25 Miles Round, for the Resident and the Visitor. With Cab Fares, Principal Omnibus Routes, Map of the Environs of London, &c. 18mo, cloth, 1*s.*

**LUCAS.—HORIZONTAL WELLS.** A New Application of Geological Principles to effect the Solution of the Problem of Supplying London with Water. By J. LUCAS, F.G.S. of the Geological Survey of England. With Maps. Crown 4to, cloth back, 10*s.* 6*d.*

**MANLY.—PRINCIPLES of BOOK-KEEPING by DOUBLE** ENTRY, in a Series of Easy and Progressive Exercises. By HENRY MANLY, Principal Writing Master and Teacher of Book-keeping in the City of London School. Third Edition. Demy 8vo, cloth, 4*s.* 6*d.*

**MARSH.—OVERLAND from SOUTHAMPTON to QUEENS-**LAND. By M. H. MARSH, M.A., F.R.G.S. With Three Coloured Maps. Crown 8vo, cloth, 3*s.* 6*d.*

**MEADEN.—A FIRST ALGEBRA for Use in Junior** Classes. By the Rev. R. ALBAN MEADEN, M.A., late Scholar of Emmanuel College, Cambridge; Senior Mathematical Master of the Bradford Grammar School. Second Edition, revised and enlarged. Fcap. 8vo, cloth, 1*s.* 6*d.*

This Work is suitable for preparing classes for the University Local Examinations, the Science Examinations, &c.

# Meteorological Office Publications.

**ANTARCTIC REGIONS.—CONTRIBUTIONS to our KNOWLEDGE** of the METEOROLOGY of the ANTARCTIC REGIONS. By Authority of the Meteorological Committee. Royal 4to, 2*s.*

**ATLANTIC OCEAN.—A DISCUSSION of the METEOROLOGY** of the PART of the ATLANTIC lying NORTH of 30° N. for the Eleven Days ending 8th of February, 1870. By Means of Synoptic Charts, Diagrams, and Extracts from Logs, with Remarks and Conclusions. Published by the Authority of the Meteorological Committee. With Books of Charts. Royal 4to, 5*s.*

—— **(North).—CURRENTS and SURFACE TEMPERATURE** of the NORTH ATLANTIC OCEAN, from the Equator to Latitude 40° N., for each Month of the Year. With a General Current Chart. By Authority of the Meteorological Committee. Royal 4to, 2*s.* 6*d.*

—— **METEOROLOGY of the NORTH ATLANTIC.** Report to the Committee of the Meteorological Office, on the Meteorology of the North Atlantic between the parallels of 40° and 50° N., as illustrated by Eight Diagrams of Observations taken on board the Mail Steamers running to and from America. With Remarks on the Difference in the Winds and Weather experienced according as the ship's course is Westerly or Easterly, and on the probable Causes of the Difference. By Captain Henry Toynbee, F.R.A.S., Marine Superintendent, Meteorological Office. Royal 8vo, 1*s.*

—— **ON THE WINDS, &c., of the NORTH ATLANTIC, along** the TRACKS of STEAMERS from the CHANNEL to NEW YORK. Translated from No. 3 of the Mittheilungen aus der Norddeutsche Seewarte. By Authority of the Meteorological Committee. Royal 8vo, 6*d.*

—— **(South).—CHARTS SHOWING the SURFACE TEMPERATURE** of the SOUTH ATLANTIC OCEAN in each Month of the Year. Compiled from Board of Trade Registers, and the Charts published by the Royal Meteorological Institute of the Netherlands. Issued under the Authority of the Committee of the Meteorological Office. Folio, boards, 2*s.* 6*d.*

**BAROMETER MANUAL.**—BOARD of TRADE. Compiled by direction of the Meteorological Committee. By Robert H. Scott, M.A., F.R.S., Director of the Meteorological Office. With Illustrative Diagrams. Royal 8vo, 1*s.*

**CAPE HORN, &c.—CONTRIBUTIONS to our KNOWLEDGE** of the METEOROLOGY of CAPE HORN and the WEST COAST of SOUTH AMERICA. Published by Authority of the Meteorological Committee. With 12 Meteorological Charts. Royal 4to, 2*s.* 6*d.*

**COAST or FISHERY BAROMETER MANUAL.**—BOARD of TRADE. Compiled under the direction of the Meteorological Committee. By Robert H. Scott, M.A., Director of the Meteorological Office. 8vo, 6*d.*

**ISOBARIC CURVES.—On the USE of ISOBARIC CURVES,** and a LINE of GREATEST BAROMETRIC CHANGE in attempting to FORETEL WINDS. Illustrated by Fourteen Diagrams of Gales in January, 1867, and August, 1868, &c. With some practical suggestions for Seamen, and a few Remarks on Buys Ballot's Law. Being a Report to the COMMITTEE of the METEOROLOGICAL OFFICE. By Captain HENRY TOYNBEE, F.R.A.S., their Marine Superintendent. Royal 8vo, 1*s*.

**LEIPZIG CONFERENCE.—REPORT of the PROCEEDINGS** of THE METEOROLOGICAL CONFERENCE at LEIPZIG, Protocols and Appendices. Published by the Authority of the Meteorological Committee. Royal 8vo, 1*s*.

**QUARTERLY WEATHER REPORT of the METEOROLOGICAL OFFICE,** with PRESSURE and TEMPERATURE TABLES. Containing the Results of the Daily Observations made at the seven Observatories established by the Meteorological Committee at KEW, STONYHURST, FALMOUTH, ABERDEEN, GLASGOW, ARMAGH, and VALENCIA.

The Plates exhibit the continuous registration of the Observations, and are arranged to show at one view the instrumental curves at each of the stations for five days, one Plate comprising Pressure and Temperature, while another shows the Direction and Velocity of the Wind; Scales of Measurement, on both the British and French systems, being given at the sides. Published by Authority of the METEOROLOGICAL COMMITTEE. Royal 4to, price 5*s*. each Part.

The Parts for 1869, 1870, 1871, 1872, and Parts I. and II. of 1873, are now ready.

**ROUTES for STEAMERS from ADEN to the STRAITS of** SUNDA AND BACK. Translated from a Paper issued by the Royal Meteorological Institute of the Netherlands. Published by the Authority of the METEOROLOGICAL COMMITTEE. Royal 8vo, 6*d*.

**STATION INSTRUCTIONS for METEOROLOGICAL TELEGRAPHY.** 8vo, 6*d*.

**STRONG WINDS.—An INQUIRY into the CONNECTION** between STRONG WINDS and BAROMETRICAL DIFFERENCES. Being a Report presented to the COMMITTEE of the METEOROLOGICAL OFFICE. By ROBERT H. SCOTT, Director of the Office. Royal 8vo, 6*d*.

**VIENNA CONGRESS.—REPORT of the PROCEEDINGS of** the METEOROLOGICAL CONGRESS at VIENNA. Protocols and Appendices. Published by the Authority of the Meteorological Committee. Royal 8vo, 1*s*.

**WEATHER TELEGRAPHY AND STORM WARNINGS.—** REPORT ON WEATHER TELEGRAPHY and STORM WARNINGS, presented to the Meteorological Congress at Vienna, by a Committee appointed at the Leipzig Conference. Published by the Authority of the METEOROLOGICAL COMMITTEE. Royal 8vo, paper cover, 1*s*.

**MEDHURST.—The FOREIGNER in FAR CATHAY.** By W. H. Medhurst, H.B.M. Consul, Shanghai. With Coloured Map. Crown 8vo, cloth, 6*s*.

Contents:— Position of Foreigners — Customs of the Chinese — Shop Signs — Advertising — Mandarin Yamens — Opium Smoking — Infanticide — Eating and Drinking — Social Institutions — Modes of Sepulture — Character of the Chinese — Specimen of Chinese Music, with Original Words and English Literal Translation, &c., &c.

**MILLER. — NOTES on the MORNING and EVENING** PRAYER and the LITANY, with a Chapter on the Christian Year. Adapted to the Requirements of the Worcester Diocesan Board of Education. By Fredk. Miller, Master of the Malvern Link National School. Second Edition. Fcap. 8vo, cloth, 1*s*.

**MILLETT (Mrs. Edward).—An AUSTRALIAN PARSONAGE;** or, the SETTLER and the SAVAGE in WESTERN AUSTRALIA. With Frontispiece. Second Edition. Large post 8vo, cloth, 12*s*.

**MIMPRISS (Robt.).—CHRIST an EXAMPLE for the YOUNG,** as EXHIBITED in the GOSPEL NARRATIVE of the FOUR EVANGELISTS. Harmonized and Chronologically Arranged, illustrated by Fifty-five Engravings, printed on different Tinted Papers to distinguish the various Periods of our Lord's Ministry, having Picture Definitions and Exercises, and a Map. Fifth Edition. Cloth, 6*s*.

**MINERAL STATISTICS of the UNITED KINGDOM of** GREAT BRITAIN and IRELAND for the YEAR 1872; with an Appendix. By Robert Hunt, F.R.S., Keeper of the Mining Records. Published by Order of the Lords Commissioners of Her Majesty's Treasury. Royal 8vo, 2*s*.

The Mineral Statistics for previous years may also be obtained.

**MONGREDIEN — ENGLAND'S FOREIGN POLICY:** An Inquiry as to whether we should continue a Policy of Intervention or adopt a Policy of Isolation. By Augustus Mongredien, Author of 'Trees and Shrubs for English Plantations.' Crown 8vo, cloth, 2*s*. 6*d*.

**MULHALL. — HANDBOOK TO THE RIVER PLATE** REPUBLICS: Comprising Buenos Ayres and the Provinces of the Argentine Republic, and the Republics of Uruguay and Paraguay. By M. G. and E. T. Mulhall, Proprietors and Editors of the Buenos Ayres 'Standard.' With Map and Two Plans. Crown 8vo, cloth, 8*s*.

**NAUTICAL MAGAZINE.** New Series. Published Monthly. 1*s*.

**NEW ZEALAND HANDBOOK:** Containing a New and Accurate Coloured Map, and giving a full description of the Provinces of Auckland, New Plymouth, Wellington, Hawkes Bay, Nelson, Marlborough, Canterbury, Otago, Southland, &c.; with Tables of Statistics, Prices, and Wages; Land Regulations; Instructions for the Voyage, Outfit, and Arrival in the Colony; also Observations on New Zealand Pursuits and Investments. Twelfth Edition. Fcap. 8vo, 1*s*.

# Ordnance Survey Publications, &c.

**ASTRONOMICAL OBSERVATIONS** made with Ramsden's Zenith Sector; together with a Catalogue of the Stars which have been observed, and the Amplitude of the Celestial Arcs, deduced from the Observations at the different Stations. 4to, sewed, 7*s.* 6*d.*

**ASTRONOMICAL OBSERVATIONS** made with Airey's Zenith Sector, 1842 to 1850. Completed by Captain W. Yolland, R.E. 20*s.*

**DOMESDAY BOOK**; or, The Great Survey of England by William the Conqueror, A.D. 1086. Facsimile of Domesday Book, reproduced by the Photozincographic Process, under the direction of Major-General Sir H. James, R.E., F.R.S., by Her Majesty's Command. The following parts are already published, in imperial 4to, cloth, *viz.*:—

In Great Domesday Book.

| | | *s.* | *d.* |
|---|---|---|---|
| Bedfordshire | price | 8 | 0 |
| Berkshire | „ | 8 | 0 |
| Buckingham | „ | 8 | 0 |
| Cambridge | „ | 10 | 0 |
| Cheshire and Lancashire | „ | 8 | 0 |
| Cornwall | „ | 8 | 0 |
| Derbyshire | „ | 8 | 0 |
| Devonshire | „ | 10 | 0 |
| Dorsetshire | „ | 8 | 0 |
| Gloucestershire | „ | 8 | 0 |
| Hampshire | „ | 10 | 0 |
| Herefordshire | „ | 8 | 0 |
| Hertfordshire | „ | 10 | 0 |
| Huntingdon | „ | 8 | 0 |
| Kent | „ | 8 | 0 |
| Lancashire (*see* Cheshire and Lancashire) | „ | 8 | 0 |
| Leicestershire and Rutland | price | 8 | 0 |
| Lincolnshire | „ | 21 | 0 |
| Middlesex | „ | 8 | 0 |
| Nottinghamshire | „ | 10 | 0 |
| Northamptonshire | „ | 8 | 0 |
| Oxfordshire | „ | 8 | 0 |
| Rutlandshire (bound with Leicestershire) | „ | 8 | 0 |
| Shropshire | „ | 8 | 0 |
| Somersetshire | „ | 10 | 0 |
| Staffordshire | „ | 8 | 0 |
| Surrey | „ | 8 | 0 |
| Sussex | „ | 10 | 0 |
| Warwickshire | „ | 8 | 0 |
| Wiltshire | „ | 10 | 0 |
| Worcestershire | „ | 8 | 0 |
| Yorkshire | „ | 21 | 0 |

In Little Domesday Book.

Essex, price 16*s.*—Norfolk, 23*s.*—Suffolk, 22*s.*

*Price of an entire Set* (*as above*), 17*l.* 3*s.*

Domesday Book complete, bound in 2 volumes, price 20*l.*

**GEODETICAL TABLES.** 1 vol. thin 4to, price 2*s.*

**JERUSALEM.—ORDNANCE SURVEY of JERUSALEM,** With Notes by Captain WILSON, R.E. Produced at the Ordnance Survey Office, Southampton, under the superintendence of Major-General Sir HENRY JAMES, R.E., F.R.S., Director.

The Survey is sold complete for Twelve Guineas, or in Divisions, as follows:—

| | £ | s. | d. |
|---|---|---|---|
| The Plans Mounted, and in a Portfolio .. .. | 2 | 18 | 0 |
| Vol. I. Containing Captain Wilson's Notes on Jerusalem, and Illustrative Diagrams .. .. .. | 2 | 0 | 0 |
| Vol. II. Containing the Photographs taken in and about the City .. .. .. .. .. .. | 7 | 14 | 0 |
| Total .. .. .. | £12 | 12 | 0 |

The Plans, Diagrams, and Photographs are sold separately. Detailed List, with Prices, post free for two Penny Stamps.

**LENGTH.—COMPARISONS of the STANDARDS of LENGTH** of England, France, Belgium, Prussia, Russia, India, Australia, made at the Ordnance Survey Office, Southampton, by Captain A. R. CLARKE, R.E., F.R.S., under the direction of Major-General Sir HENRY JAMES, R.E., F.R.S., &c., Cor. Mem. of the Royal Geographical Society of Berlin, Director of the Ordnance Survey. Published by Order of the Secretary of State for War. 1 vol. 4to, 287 pp. and plates. Price 15*s.*

**LOUGH FOYLE BASE.—An ACCOUNT of the MEASUREMENTS** of the LOUGH FOYLE BASE. By Captain W. YOLLAND, R.E. 4to, cloth, 20*s.*

**MAGNA CARTA.**—KING JOHN, A.D. 1215. Facsimile of Magna Carta; Photozincographed at the Ordnance Survey Office, Southampton, under the superintendence of Captain PARSONS, R.E., F.R.A.S. Price 1*s.* 6*d.*, with the Translation.

**MARGINAL LINES.—On the CONSTRUCTION and USE of** the SIX SHEETS of MARGINAL LINES for MAPS of any part of the WORLD. Price 1*s.*

*** The Six Sheets of Marginal Lines are published, price 6*s.*

**METEOROLOGICAL OBSERVATIONS, TABLES for.** Published separately, in 1 vol. royal 8vo, price 2*s.* 6*d.*

**DITTO** taken at the Stations of the Royal Engineers in the Years 1853 to 1859. 1 vol. 4to, price 10*s.* 6*d.*

**METEOROLOGICAL OBSERVATIONS,** taken at the Stations of the Royal Engineers, 1853–4. 1 vol. 4to, price 2*s.* 6*d.*

**DITTO** taken at Dublin. 1 vol. 4to, price 5*s.*

**DITTO** taken at the Royal Engineers' Office, New Westminster, British Columbia, in 1860–1. Price 1*s.*

**NATIONAL MANUSCRIPTS of ENGLAND.** A Series of PHOTOZINCOGRAPHIC FACSIMILES of some of the most interesting of our National MSS., copied by order of Her Majesty's Government, by Major-General Sir HENRY JAMES, R.E., F.R.S., Director of the Ordnance Survey; with Translations and Introductory Notes by W. BASEVI SANDERS, Esq., Assistant Keeper of Her Majesty's Records. This series, consisting of Royal Charters and Grants, and the Letters of Royal and Eminent or Remarkable Persons, has been selected under the direction of the Right Hon. Sir JOHN ROMILLY, Master of the Rolls, by THOMAS DUFFUS HARDY, Esq., Deputy Keeper of Her Majesty's Records; and includes some of the most remarkable Original Documents deposited in Her Majesty's Record Office, together with a few from other repositories, including the most perfect Original Copy of Magna Carta now extant. The Facsimiles are arranged chronologically, and the Translations are interleaved so as to appear opposite to each page of the Facsimile of the Original Manuscripts. The series is published in Four Parts, price 16*s.* each.

—— **SCOTLAND.**—Photozincographic Facsimiles of National Manuscripts of Scotland. Parts II. and III. Price 21*s.* each.
Part I. out of print.

**NETLEY ABBEY—PHOTOZINCOGRAPHED VIEWS OF.** Sixteen Photographic Views, &c., of Netley Abbey, including illustrated Title Page and Plan of the Abbey. Photozincographed at the Ordnance Survey Office, Southampton. Major-General Sir HENRY JAMES, R.E., F.R.S. (Director). Price complete, in a neat portfolio, 25*s.*

**ORDNANCE TRIGONOMETRICAL SURVEY of the UNITED KINGDOM.** In Four Volumes, royal 4to, illustrated with numerous Plates, bound in cloth, 3*l.* 5*s.* The Account of this Survey is now complete, and may be had as above, or in separate volumes as under:—

I. THE PRINCIPLE TRIANGULATION of the UNITED KINGDOM, with the Figure, Dimensions, and Mean Specific Gravity of the Earth as derived therefrom. With Plates, 1*l.* 15*s.*

APPENDIX TO DITTO.—Determination of the Positions of Feaghmain and Haverfordwest, Longitude Stations on the great European Arc of Parallel. 4to, price 4*s.* 6*d.*

II. THE LEVELLING TAKEN IN ENGLAND AND WALES. With Plates, 15*s.*

III. THE LEVELLING TAKEN IN SCOTLAND. With Plates, 10*s.*

IV. THE LEVELLING TAKEN IN IRELAND. Price 5*s.*

*** The Volumes of Levelling will be found of great value to all Engineers, Geologists, and Scientific Persons, as they contain the Lines of Levels taken throughout the Kingdom, and give the exact height of every Bench Mark or Bolt, or other object observed above the mean level of the sea.

**SINAI.—ORDNANCE SURVEY of SINAI.** This Survey is published in Three Parts, and sold complete for 22*l.*

The Parts can also be had separately as follows:—

Part I. DESCRIPTIVE ACCOUNT AND ILLUSTRATIONS.—The Origin, Progress, and Results of the Survey, with twenty pages of Illustrations. In 1 Volume, imperial folio, half-bound, price 4*l.*

Part II. MAPS.—This Part consists of Ten Maps and Sections of the Peninsula of Sinai, Mount Sinai, and Mount Serbál, mounted on cloth to fold. With portfolio, price 5*l.* Single Maps can be had if required.

Part III. PHOTOGRAPHS.—The Photographs taken to illustrate the Ordnance Survey of Sinai are published in 3 Vols., half-bound in morocco, price 13*l.*; or separately, price, Vol. I., 5*l.* 5*s.*; Vol. II., 5*l.* 5*s.*; Vol. III., 2*l.* 10*s.* Any of the Photographs (numbering 153) may be purchased separately at the following prices, *viz.* those in Vols. I. and II., unmounted, 1*s.*, mounted, 1*s.* 6*d.* each; those in Vol. III., unmounted, 9*d.*, mounted, 1*s.* each.

—— **ONE HUNDRED and ELEVEN ADDITIONAL PHOTOGRAPHS** are also published, and may be purchased separately; price 1*s.* each unmounted; or 1*s.* 6*d.* mounted.

—— **STEREOSCOPIC VIEWS,** Thirty-six in number, in a Box-Stereoscope. Price Two Guineas.

*A Detailed List of the Photographs and List of Maps sent by post for Two Penny Stamps.*

**SPHERE and SPHEROID.**—On the Rectangular Tangential Projection of the Sphere and Spheroid, with Tables of the quantities Requisite for the construction of Maps on that Projection; and also for a Map of the World on the scale of ten miles to an inch, with Diagrams and Outline Map. By Major-General Sir HENRY JAMES, R.E., F.R.S., &c. Price 8*s.* 6*d.*

**STONEHENGE, TURUSACHAN, CROMLECHS, and SCULPTURED STONES.** Plans and Photographs; with Descriptions and Notes relating to the Druids. Also an Appendix on some Sculptured Stones recently found in Ireland; accompanied by Plates. By Major-General Sir HENRY JAMES, R.E., F.R.S. 1 vol. 4to, cloth, price 14*s.* 6*d.*

Photograph of Stonehenge Restored, showing Druidical Sacrifice by Night. Price 1*s.* 3*d.* unmounted; 1*s.* 9*d.* mounted.

---

## PALESTINE EXPLORATION FUND PHOTOGRAPHS.

PHOTOGRAPHIC VIEWS of PALESTINE, taken expressly for the Palestine Exploration Fund in 1865, 1866, 1867. By Sergeant H. Phillips, R.E., under the orders of Captain Wilson, R.E., and Lieutenant Warren, R.E.

This beautiful series of Original Photographs now comprises 356 most interesting Views of the Cities, Villages, Temples, Synagogues, Churches, Ruins, Tombs, Seas, Lakes, Priests, Pilgrims, Inhabitants, &c., of the Holy Land and Jerusalem. Each Photograph is Mounted on a white board, size 13 inches by 11. Selections of the best Photographs have been made, and can now be supplied at the following prices:—

100 Photographs, to Subscribers, 4*l.*; Non-Subscribers, 5*l.*
50 „ to Subscribers, 45*s.*; Non-Subscribers, 55*s.*
25 „ to Subscribers, 25*s.*; Non-Subscribers, 35*s.*
Single Photographs, to Subscribers, 1*s.* 3*d.*; Non-Subscribers, 1*s.* 9*d.*

A List of the Selected Views gratis on application, or per post for penny stamp. Descriptive Catalogue of the 100 Selected Photographs, 6*d.*

## PARKER.—HISTORICAL PHOTOGRAPHS illustrative of the ARCHÆOLOGY of ROME and ITALY. By John Henry Parker, C.B., Hon. M.A. Oxon., F.S.A., &c.

In Royal 4to volumes, cloth.

One Hundred Best Photographs, selected by W. S. W. Vaux, Esq. 5*l.* 5*s.*
Recent Excavations in Rome. 100 Photographs. 5*l.* 5*s.*
Walls of the Kings on the Hills of Rome, and similar Walls in other Ancient Cities of Italy, for Comparison. 24 Photographs. 1*l.* 14*s.*
Walls and Gates of Rome, of the Time of the Empire and of the Popes. 20 Photographs. 1*l.* 10*s.*
Historical Construction of Walls, from the Times of the Kings of Rome to the Middle Ages, showing Historical Types of each Period. 30 Photographs. 2*l.*
Aqueducts, from their Sources to their Mouths. 40 Photographs. 2*l.* 10*s.*
Catacombs, or Cemeteries of Rome; Construction, and Fresco Paintings. *Taken with the light of Magnesium.* 30 Photographs. 2*l.*
Forum Romanum. 20 Photographs. 1*l.* 10*s.*
The Colosseum. 20 Photographs. 1*l.* 10*s.*
The Palatine Hill. 30 Photographs. 2*l.*
Sculpture.—Statues. 30 Photographs. 2*l.*
—— Bas-Reliefs. 30 Photographs. 2*l.*
Sarcophagi of the first Four Centuries. 20 Photographs. 1*l.* 10*s.*
Mosaic Pictures of the first Nine Centuries. 20 Photographs. 1*l.* 10*s.*
Mosaic Pictures, Centuries XII.-XVII. 20 Photographs. 1*l.* 10*s.*
Fresco Paintings of the first Nine Centuries. 20 Photographs. 1*l.* 10*s.*
Fresco Paintings, Centuries XII.-XVI. 20 Photographs. 1*l.* 10*s.*
Church and Altar Decorations. Cosmati Work. 30 Photographs. 2*l.*
Pompeii. Remains of the City. 20 Photographs. 1*l.* 10*s.*
Complete Set of Photographs (upwards of 3000), 120*l.*
Systematic Catalogues, according to Subjects, Parts I. and II., each, 1*s.*
General Catalogue of Selected Photographs, 1*s.*
Single Photographs, unmounted, 1*s.*

**PALMER.—The ORDNANCE SURVEY of the KINGDOM:** Its Objects, Mode of Execution, History, and Present Condition. By Captain H. S. Palmer, R.E. With a Catalogue of the Maps, Plans, and other Publications of the Ordnance Survey of Great Britain and Ireland, and of the Models of the Ordnance Surveys of Jerusalem and Sinai, published under the Superintendence of Major-General Sir Henry James, R.E., F.R.S. Five Coloured Index Maps. Demy 8vo, cloth, 2*s.* 6*d.*

**PHILPOT.—GUIDE BOOK to the CANADIAN DOMINION:** Containing full information for the Emigrant, the Tourist, the Sportsman, and the small Capitalist. Dedicated, by permission, to His Royal Highness Prince Arthur. By Harvey J. Philpot, M.D. (Canada), M.R.C.S.L., &c., late Assistant-Surgeon to Her Majesty's Forces in Turkey and the Crimea. With a Preface by Thomas Hughes, Esq., M.P., and a Coloured Map. Super-royal 16mo, 4*s.*

**PLATTS' (Rev. J.) DICTIONARY of ENGLISH SYNONYMES:** Comprehending the Derivations and Meanings of the Words, and the Distinctions between the Synonymes; with Examples. New Edition. Demy 12mo, 3*s.* 6*d.*

**PLŒTZ.—MANUEL DE LA LITTÉRATURE FRANÇAISE** des XVII^E^, XVIII^E^, et XIX^E^ Siècles. Par C. Plœtz, Docteur en Philosophie, ancient Premier Professeur au Collége Français de Berlin. Seconde Edition, Revue et Augmentée. Demy 8vo, cloth, 6*s.* 6*d.*

**POOR RELIEF IN DIFFERENT PARTS OF EUROPE:** being a Selection of Essays, translated from the German Work, 'Das Armenwesen und die Armengesetzgebung in Europäischen Staaten herausgegeben,' Von A. Emminghaus. Revised by E. B. Eastwick, C.B., M.P. Crown 8vo, cloth, 7*s.*

**POPE.—A CLASS BOOK of RUDIMENTARY CHEMISTRY.** By the Rev. Geo. Pope, M.A., Fellow of Sidney Sussex College, Cambridge, and one of the Masters of the College, Hurstpierpoint. 18mo, stiff cover, 9*d.*

**RAMSAY.—PHYSICAL GEOLOGY and GEOGRAPHY of** GREAT BRITAIN. By A. C. Ramsay, LL.D., F.R.S., &c., Director-General of the Geological Surveys of the United Kingdom. Fourth Edition, considerably enlarged, and illustrated with Numerous Sections and a GEOLOGICAL MAP of GREAT BRITAIN, printed in Colours. Post 8vo, cloth, 7*s.* 6*d.*

"This edition, has been partly rewritten, and contains much new matter. . . . . The preliminary sketch of the different formations, and of the phenomena connected with the metamorphism of rocks, has been much enlarged; and many long and important paragraphs have been added in the chapters on the physical structure of England and Scotland. . . . An entire new chapter has been added on the origin of the river courses of Britain; and large additions have been made to the earlier brief account of soils, and the economic products of the various geological formations. There are also many new illustrative sections."—*Extract from Preface.*

**REYNOLDS (Geo.).—EXERCISES in ARITHMETIC**; with a copious variety of Bills of Parcels. Intended as an Auxiliary Companion to every Treatise on Practical and Commercial Arithmetic. 12mo, cloth, 2*s.* 6*d.*

—— KEY to Ditto. 12mo, 2*s.*

**ROBSON (J., B.A.).—CONSTRUCTIVE LATIN EXERCISES,** for Teaching the Elements of the Language on a System of Analysis and Synthesis, with Latin Reading Lessons and copious Vocabularies. By JOHN ROBSON, B.A., Lond., Secretary of University College, London, formerly Classical Master in University College School. Eighth Edition. 12mo, cloth, 4*s.* 6*d.*

—— **CONSTRUCTIVE GREEK EXERCISES,** for Teaching the Elements of the Language on a System of Analysis and Synthesis, with Greek Reading Lessons and copious Vocabularies. By JOHN ROBSON, B.A., Lond., Secretary of University College, London, formerly Classical Master in University College School. 12mo, cloth, 7*s.* 6*d.*

The plan of this Book is as nearly as possible the same as that of the Author's 'Latin Exercises.'

—— **FIRST GREEK BOOK.** Containing Exercises and Reading Lessons on the Inflexions of Substantives and Adjectives, and of the Active Verb in the Indicative Mood. With copious Vocabularies. Being the First Part of the Constructive Greek Exercises. Second Edition. 12mo, cloth, 3*s.* 6*d.*

**RUSSELL.—BIARRITZ and the BASQUE COUNTRIES.** By Count HENRY RUSSELL, Member of the Geographical and Geological Societies of France, of the Alpine Club, and Société Ramond, Author of 'Pau and the Pyrenees,' &c. Crown 8vo, with a Map, 6*s.*

**SCHOOL-BOYS' LETTERS for COPYING and DICTATION:** being a Series of Lithographed Letters on Subjects interesting to School-Boys, with Remarks on the Essentials of Good Writing, &c. Third Edition. Large post 8vo, cloth, 2*s.* 6*d.*

**SCHOOL PUNISHMENT REGISTER.—The LONDON** SCHOOL REGISTER of PUNISHMENTS. Designed to meet the Requirements of School Boards, &c. Fcap. folio, stiff boards, cloth back, 2*s.* 6*d.*

**SCHOOL REGISTER.—HALBRAKE REGISTER of ATTENDANCE** and STUDIES. Designed for Private and Middle-Class Schools. Second Edition. Demy 8vo, coloured wrapper, 8*d.*

—— **THE DURHAM SCHOOL REGISTERS.** By the Rev. CANON CROMWELL, M.A., Principal of St. Mark's College, Chelsea.

| | *s.* | *d.* |
|---|---|---|
| 1. Admission Register for 1000 Names .. .. .. .. .. | 3 | 0 |
| 2. Class Register for Large Schools (50 Names) .. .. .. | 0 | 7 |
| 3. Class Register for Small Schools (34 Names) .. .. .. | 0 | 6 |
| 4. General Register or Summary, for Three Years .. .. | 3 | 0 |

**SCHOOL REGISTER. — LONDON SCHOOL REGISTER** of ADMISSION, PROGRESS, and WITHDRAWAL. Adapted to the Requirements of the Committee of Council on Education. By WILLIAM RICE, F.R.G.S., Author of the 'London Class Register,' the 'Class and Home Lesson Book of English History,' the 'Scholar's Wordbook and Spelling Guide,' the 'Orthographical Copy Books,' &c. Fcap. folio, stiff boards, leather back, 4*s*.

*** For Complete List of School Registers and Account Books, see Stanford's Select List of Education Works, gratis on application, or per post for penny stamp.

**—— LONDON CLASS-REGISTER and SUMMARY OF** ATTENDANCE and PAYMENTS. Ruled and Printed for 52 Weeks. Adapted to the requirements of the "Special Minute of the Committee of Council on Education." By WILLIAM RICE, F.R.G.S., Author of the 'Class and Home-Lesson Book of English History,' &c. A New and Improved Edition. Fcap. folio, 1*s*.

**SCOTT (J. R.).—The FAMILY GUIDE to BRUSSELS:** Comprising Hints upon Hiring Houses, Furniture, Servants. Cost of Living, Education, and the General Information necessary for a Family purposing to reside in that city. By J. R. SCOTT, of Brussels. Crown 8vo, cloth, gilt, 4*s*.

**SIMMS.—The FIRST SIX BOOKS of the ILIAD of HOMER,** Translated into Fourteen-Syllable Verse, with Preface and Notes, and a Map of Greece in the Homeric Age. Designed as a Reading Book for Colleges and Schools. By the Rev. EDWARD SIMMS, M.A., Oxon., Vicar of Escot, Devon. Demy 8vo, cloth, 7*s*. 6*d*.

**SKEEN.—ADAM'S PEAK:** LEGENDARY, TRADITIONAL, and HISTORIC NOTICES of the SAMANALA and SRÍ-PÁDA. By WILLIAM SKEEN, Member of the Ceylon Branch of the Royal Asiatic Society. With Map. Fcap. 4to, cloth, 10*s*. 6*d*.

**—— MOUNTAIN LIFE and COFFEE CULTIVATION in** CEYLON; a Poem on the KNUCKLES RANGE, with other Poems. By WILLIAM SKEEN, Member of the Ceylon Branch of the Royal Asiatic Society. Fcap. 4to, cloth, 7*s*.

**STAINBANK.—COFFEE IN NATAL: its CULTURE and** PREPARATION. By H. E. STAINBANK, of H. E. Stainbank & Co., Coedmore Estate, and Manager of the Natal Coffee Works, Umgeni, Natal. In Two Parts (Part I., Culture of Coffee.—Part II., Preparation for Market). With Appendix, Diagrams, &c. Crown 8vo, cloth, 2*s*.

**STATISTICAL SOCIETY.—JOURNAL of the STATISTICAL** SOCIETY of LONDON. Published Quarterly, price 5*s*. Complete Sets, from the Year 1838 to December, 1873, can be had, with General Index up to 1872, price 23*l*. 15*s*. 6*d*.

**STOCQUELER.—A FAMILIAR HISTORY of the BRITISH** ARMY, from the Restoration in 1660 to the Present Time, including a Description of the Volunteer Movement, and the Progress of the Volunteer Organization. By J. H. STOCQUELER, Author of an 'Illustrated Life of the Duke of Wellington,' 'The Military Encyclopædia.' Crown 4to, cloth, 21*s.*

**SULLIVAN (Sir Edward, Bart.).—TEN CHAPTERS on** SOCIAL REFORM. Demy 8vo, cloth, price 5*s.*

**— PROTECTION to NATIVE INDUSTRY.** By Sir EDWARD SULLIVAN, Bart., Author of 'Ten Chapters on Social Reform.' Demy 8vo, cloth, 1*s.*

**SYMONS.—BRITISH RAINFALL, 1873.** The DISTRIBUTION of RAIN over the BRITISH ISLES during the YEAR 1873, as observed at about 1700 Stations in Great Britain and Ireland. With MAPS and ILLUSTRATIONS. Compiled by G. J. SYMONS, F.M.S., F.R.B.S., Member of the Scottish Meteorological Society, &c. Demy 8vo, cloth, 5*s.* [*Published Annually.*

**— RAIN: HOW, WHEN, WHERE, and WHY it is** MEASURED; being a Popular Account of Rainfall Investigations. With Illustrations. By G. J. SYMONS, F.M.S., Editor of 'British Rainfall,' &c. This work is intended to serve a double purpose—to be a manual for the use of observers, and to provide the public at large with an epitome of the results hitherto obtained, and their application to the wants of civilized life. It also contains interesting particulars of the Rainfall in all parts of the world. Post 8vo, cloth, 2*s.*

**— The MONTHLY METEOROLOGICAL MAGAZINE.** Vols. I. to VIII. (1873). Demy 8vo, cloth, price 5*s.* each. Published in Monthly Parts, 4*d.* each.

**— REGISTRATION FORMS.**—Forms for One Year, with Instructions, in stiff cover, 2*s.*
Forms for Five Years, with Instructions, half-bound, 7*s.* 6*d.*

**— BAROMETER DIAGRAMS.**—Set of 12 for One Year. 1*s.*

**— REGISTER of RAINFALL for ONE YEAR.** Fcap. folio, 3*d.*

**TAYLER.—The NATIONAL TAXES.** The History, Progress, and Present State of the Revenues of England derived from Taxation, and their Expenditure. By WM. TAYLER, Esq., F.S.S., Author of 'History of Taxation in England.' Crown 8vo, 2*s.* 6*d.*

**TOOGOOD (Mrs.).—SIMPLE SKETCHES from CHURCH** HISTORY, for YOUNG PERSONS. New Edition. 18mo, 1*s.* 6*d.*

**TYRRELL (Lieut.-Col.).—WATERWAYS or RAILWAYS;** or, The FUTURE of INDIA. With Map. Crown 8vo, cloth, 5*s.*

**VICTORIA, The BRITISH "EL DORADO."** Showing the advantages of that Colony as a field for Emigration. By a COLONIST of Twenty Years' Standing, and late Member of a Colonial Legislature. With Two Coloured Views and a Map. Super-royal 16mo, cloth, 5*s.* 6*d.*

**WALLACE'S (W.) MINERAL DEPOSITS.**—The Laws which Regulate the Deposition of Lead Ore in Mineral Lodes. Illustrated by an Examination of the Geological Structure of the Mining Districts of Alston Moor. With Map and numerous Coloured Plates. Large demy 8vo, cloth, 25*s.*

**WEBBER.—THE KAIETEUR FALLS, BRITISH GUIANA.** THE ESSEQUIBO and POTARO RIVERS. With an Account of a Visit to the Kaleteur Falls. By Lieut.-Colonel Webber, 2nd West India Regiment. With Map and Frontispiece, and Descriptive Notes on the Geology of Guiana. Crown 8vo, cloth, 4*s.* 6*d.*

**WELD.—HINTS to INTENDING SHEEP FARMERS** in NEW ZEALAND. By Frederick A. Weld, New Zealand, Member of the House of Representatives, &c. With an Appendix on the Land Regulations. Fcap. 8vo, 8*d.*

**WHITAKER.—The GEOLOGY of the LONDON BASIN.** Part I. The Chalk and the Eocene Beds of the Southern and Western Tracts. By W. Whitaker, B.A. Parts by H. W. Bristow, F.R.S., and T. McK. Hughes, M.A. Royal 8vo, cloth, 13*s.*

*** This work forms Volume IV. of the 'Memoirs of the Geological Survey of Great Britain.'

**WILKINS.—The GEOLOGY and ANTIQUITIES of the ISLE** of WIGHT. By Dr. E. P. Wilkins, F.G.S., &c. To which is added the Topography of the Island—so condensed as to give all that is useful to the Tourist—by John Brion. It is illustrated by an elaborately-executed Relievo Map of the Island, coloured geologically; by numerous finely-engraved geological sections; and by a fine lithograph in colours of the tesselated pavements of the Roman Villa lately discovered at Carisbrooke. Super-royal 8vo, cloth, 7*s.* 6*d.*

**WYATT.—A POLITICAL and MILITARY HISTORY of the** HANOVERIAN and ITALIAN WAR. By Captain W. J. Wyatt (Unattached), formerly of the Radetzky Hussars. With Maps and Plans. Royal 8vo, 10*s.* 6*d.*

**—— A POLITICAL and MILITARY REVIEW of the** AUSTRO-ITALIAN WAR of 1866, with an Account of the Garibaldian Expedition to the Tyrol. By Captain W. J. Wyatt (Unattached), Author of 'A Political and Military History of the Hanoverian and Italian War,' &c. With Photographic Portrait of the Archduke Albrecht. Demy 8vo, cloth, 6*s.*

**YOUNG.—READABLE SHORT-HAND—SELF-TAUGHT:** Being a System by which people can teach themselves, write the longest word without lifting the pen, read what they write, and correspond with friends at home or abroad on pleasure or business. It embraces a double set of vowels, with Liquid Consonants grafted on the other letters; with a Combination of Words in most familiar use into ready sentences. The whole forming a System of Readable Short-Hand, Shortened. By Murdo Young. Demy 12mo, boards, 2*s.* 6*d.*

**SANITARY LAW, ENGINEERING, and PRACTICE,** intended to contain all information required by Sewer Authorities, and their several Officers, and to serve as a complete *vade-mecum*, or *practical* book of reference, both for them and the Engineering Profession. By HENRY LAW, C.E., Author of 'The Rudiments of Civil Engineering,' 'The Art of Constructing Common Roads,' &c.

PART I.—LEGAL.—Acts of Parliament relating to Sanitary Matters, omitting portions repealed; with a *complete Classified Abstract.* Mode of procedure for obtaining Provisional Orders, Acts of Parliament, Loans from Exchequer Loan Commissioners; Extracts from Standing Orders; &c., &c.

PART II.—CONSTRUCTIVE.—Forms of Specifications for the several works required, with Drawings of same, giving proportions and mode of constructing Sewers, Wells, Tanks, Reservoirs, House and Branch Sewers, Water-Closets, Earth-Closets, &c., Flushing and Ventilating Sewers, Straining, Filtering, and Pumping Sewage, &c. Estimates and Price Lists of Materials and Plant.—Tables of Quantities of Sewage, Water Supply and Rainfall, Discharge of Sewers, Pipes, Weirs, Open Channels, &c. Tides as affecting Level of Outfalls.

PART III.—DISPOSAL OR UTILIZATION OF SEWAGE.—Composition of Sewage, &c. Chemical Nature and Processes for Purification.—Abstract of Experiments, &c.—The Application and Utilization of Sewage. Explanation of the principles of the Processes already adopted, namely:—1. Precipitation.—2. Irrigation.—3. Downward Intermittent Filtration.—Cost of these various Processes.

PART IV.—SANITARY.—Sanitary Measures and Regulations.—Conditions affecting Human Health.—Disinfectants, &c.—Diseases engendered by want of Sanitary Care.—Sanitary Principles in the Construction of Dwellings.—Ventilation. Medium 8vo, cloth.

**BRITISH MANUFACTURING INDUSTRIES.** Edited by G. PHILLIPS BEVAN, F.G.S., &c. This important work will include Mining, Coal, Iron and Steel, Copper Smelting, Brass Founding, Tin Plate and Zinc Working, Guns, Pins and Needles, Nails, Electro-plate, Saddlery, Siege and War Material, Agricultural Machinery, Cutlery, Railways, Tramways, Telegraphs, Ship Building, Alkalies, Acids, Soap, &c., Explosives and Gunpowder, Woollen, Linen and Flax, Silk, Hosiery, Lace, Carpets, Cotton, Dyeing and Bleaching, Pottery, Glass, India-rubber, Gutta-percha, Cordage, Leather and Hides, Quarries and Building Stones, Gas and Lighting, Oil, Candles, Paper, Printing and Bookbinding, Furniture and Woodwork, Jewellery, Musical Instruments, Watches and Clocks, Toys, Butter and Cheese, Salt, Bread, Biscuits, Preserved Provisions, Sugar Refining, Brewing and Distilling, Tobacco, &c., &c. Medium 8vo, cloth.

**KASHMIR, &c.—An ACCOUNT of the TERRITORIES** of the MAHARAJA of JUMMOO and KASHMIR. By FREDERIC DREW, F.R.G.S., F.G.S., Associate of the Royal School of Mines; late Governor of Gilgit, and Geologist to the Maharaja. With Maps and Illustrations. Medium 8vo, cloth.

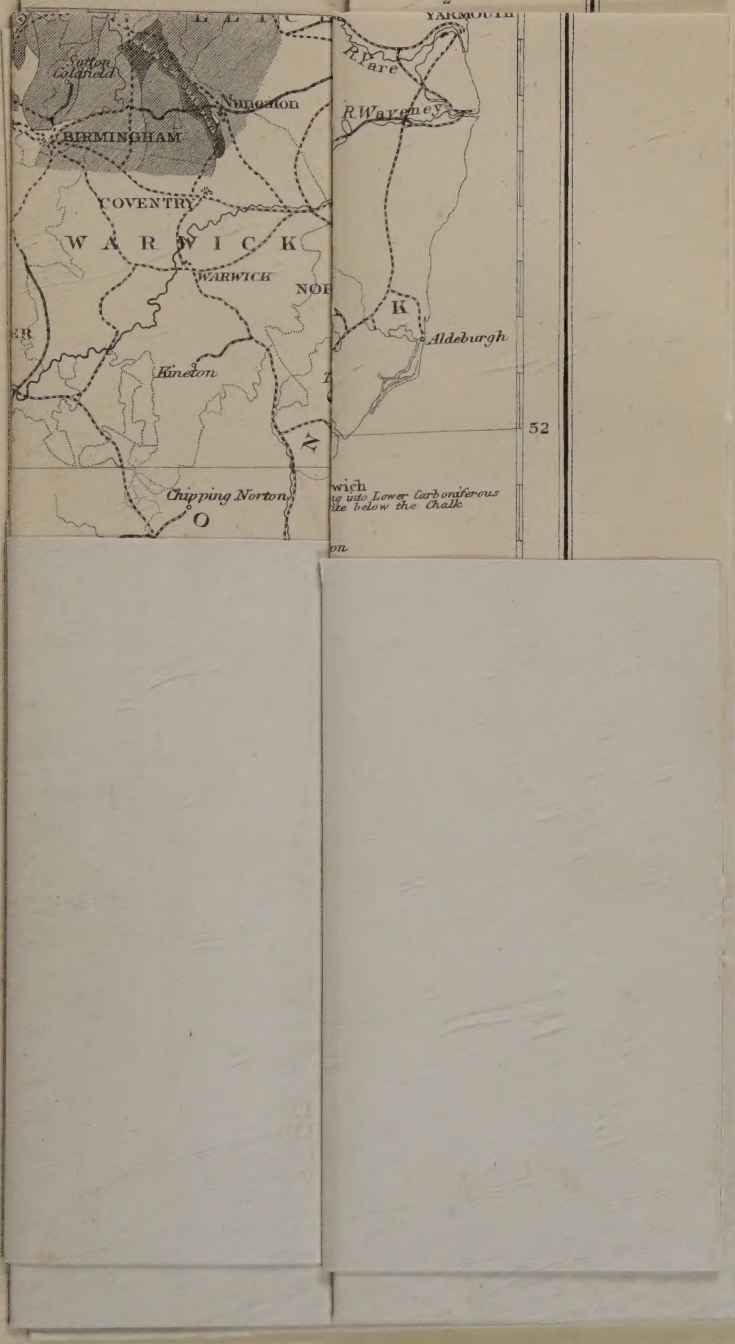
2
2
YARMOUTH
Sutton Coldfield
Nuneaton
BIRMINGHAM
COVENTRY
W A R W I C K
WARWICK
Kineton
Chipping Norton
O
R.Bure
R.Waveney
K
Aldeburgh
52
wich
ng into Lower Carboniferous
ite below the Chalk